



Dell XPS 15 9530 Base-Cover Assembly Replacement

How to remove/replace the Dell XPS 15 9530's Base-Cover Assembly (bottom panel) so that the laptop's components can be accessed.

Written By: William Daniels



INTRODUCTION

How to remove/replace the Dell XPS 15 9530's Base-Cover Assembly (bottom panel) so that the laptop's components can be accessed.

The information and pictures in this guide have been taken from the service manual from this device, listed on the product page. If you need any additional information on disassembling this device, please consult the service manual.

TOOLS:

- [Phillips #0 Screwdriver](#) (1)
- [Spudger](#) (1)


Step 1 — Unscrewing the Base-Cover Assembly



- After turning off the system, unscrew the 12 Philips screws (#1) that are on the bottom of the laptop.

 Don't forget to unscrew the two screws hidden under the system badge!

Step 2 — Prying Off the Base-Cover Assembly

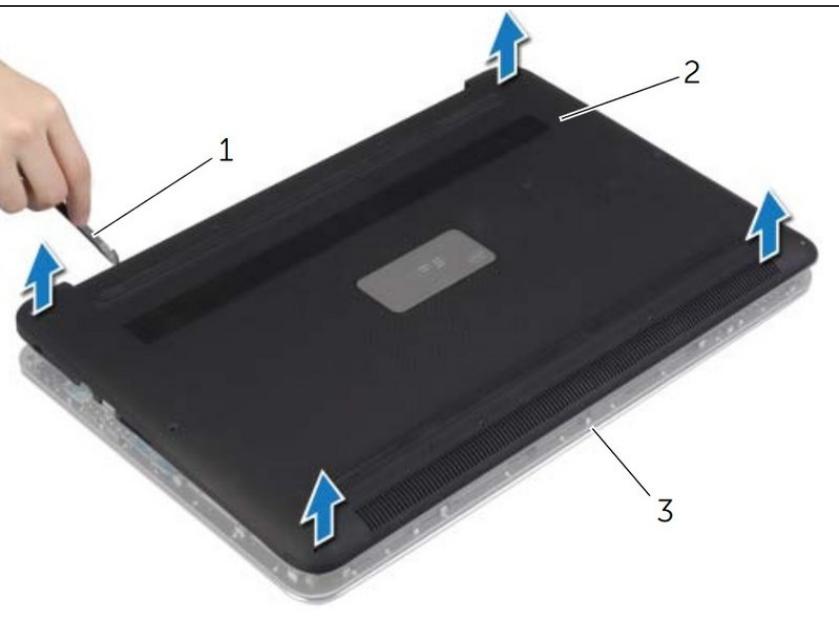

- Using a spudger or some other prying tool (#1), pry off the base-cover assembly from the rest of the system.

To reassemble your device, follow these instructions in reverse order.