




Dell XPS 15 9530 Battery Replacement

How to replace a Dell XPS 15 9530 battery.

Written By: Larissa Omura

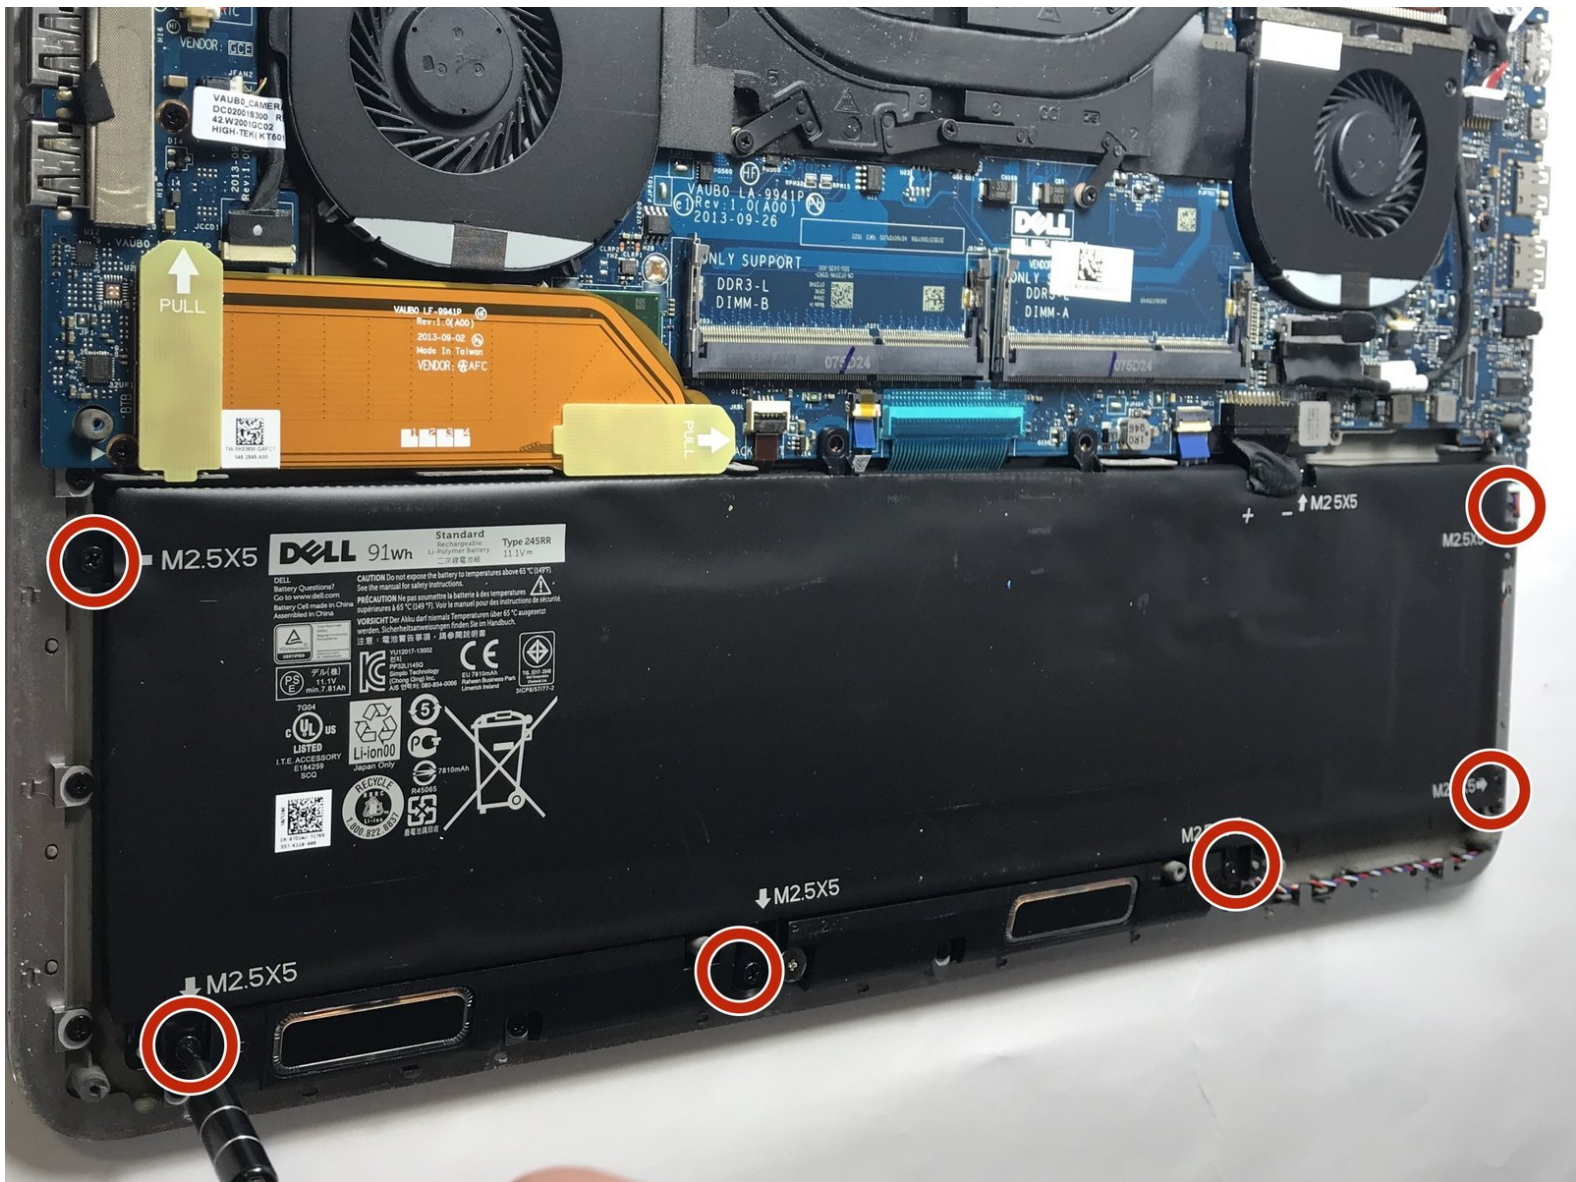


INTRODUCTION

Removal of the battery will be covered in this guide. Be careful disconnecting cables as to not break them or their connectors.

TOOLS:

- [T5 Torx Screwdriver](#) (1)
 - [Spudger](#) (1)
 - [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Base Cover

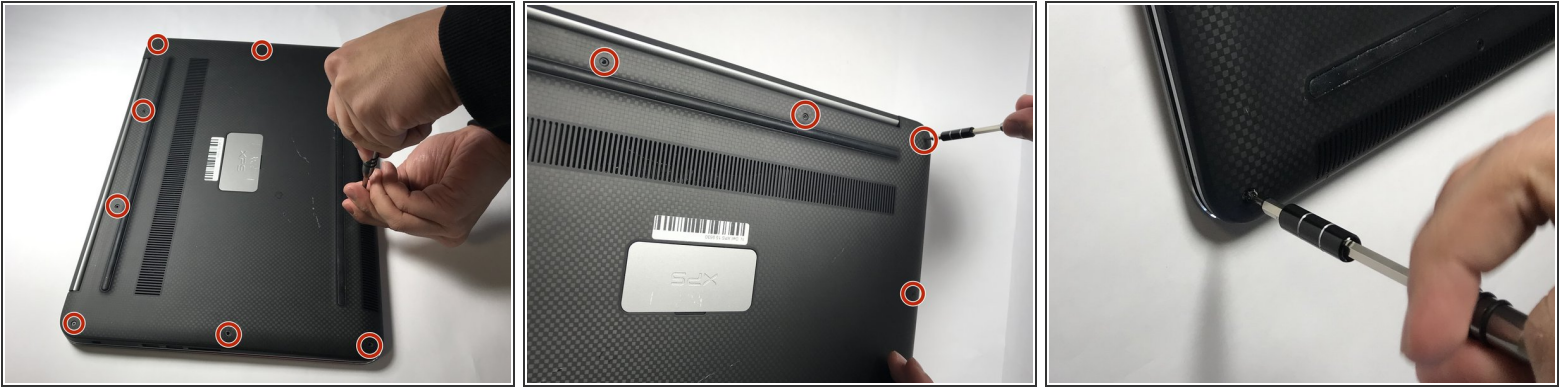

- Using a T5 Torx screwdriver, remove ten 3mm screws.

Step 2




- Lift the plastic tab.
- Remove two 3mm Phillips #0 screws under the plastic tab.

Step 3




- Lift the lower case off.

Step 4 — Battery

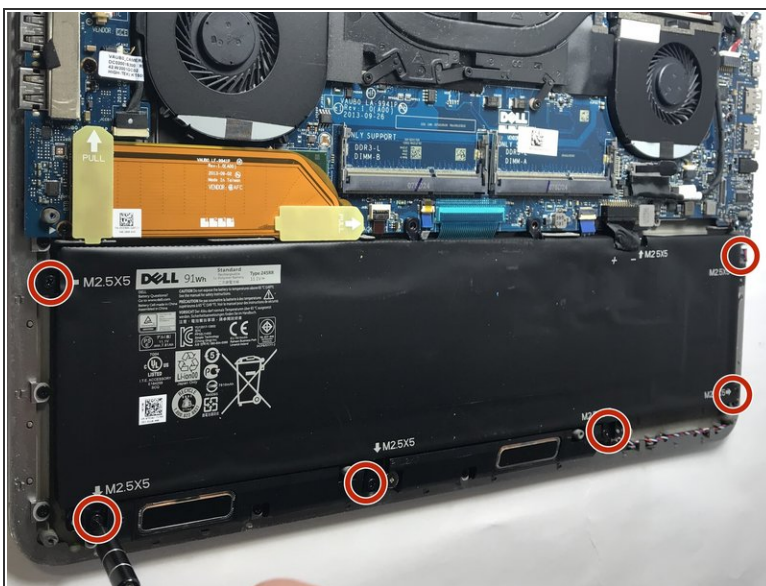

- Using a Phillips #0 screwdriver, remove the six 3.5mm screws that secure the battery to the palm rest assembly.

Step 5

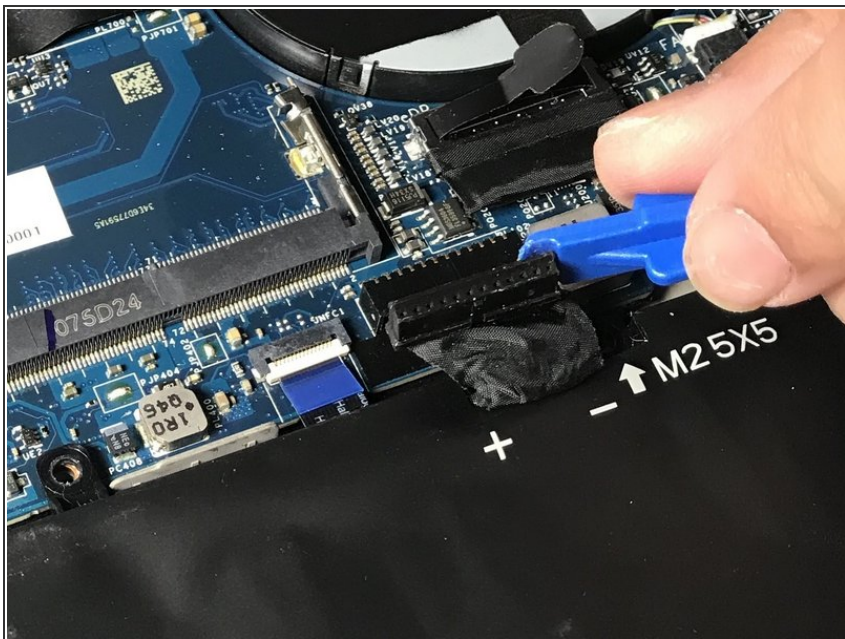

- Disconnect the battery cable from the system board.

⚠ Be sure to use a plastic tool, not a metal one.

Step 6



- Lift the battery off the chassis.

To reassemble your device, follow these instructions in reverse order.