




# Dell XPS 15 9530 Touch Pad Replacement

How to replace a Dell XPS 15 9530 touch pad.

Written By: Larissa Omura

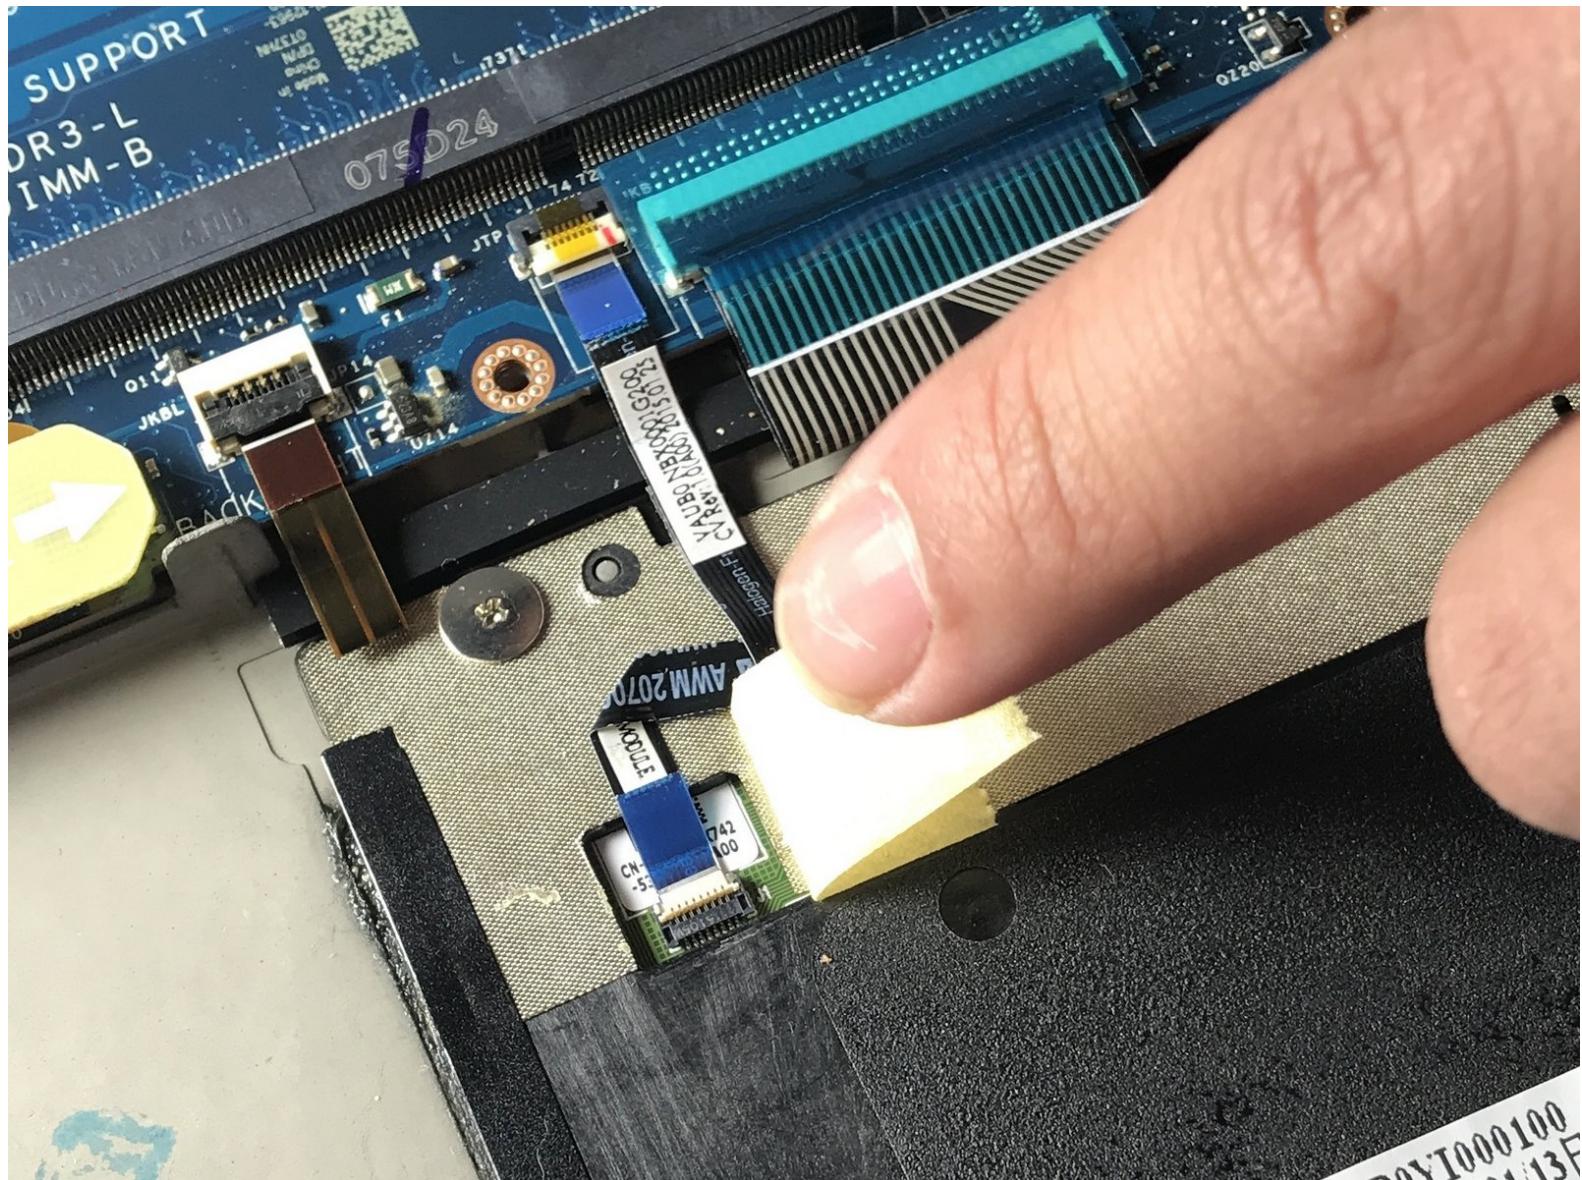


## INTRODUCTION

Removal of the touch pad will be covered in this guide. To successfully remove the battery, a #0 Phillips screwdriver, a T5 Torx screwdriver, and a plastic spudger are needed. Be careful disconnecting cables as to not break them or their connectors.

### TOOLS:


- [T5 Torx Screwdriver](#) (1)
- [Spudger](#) (1)
- [Phillips #0 Screwdriver](#) (1)

## Step 1 — Battery

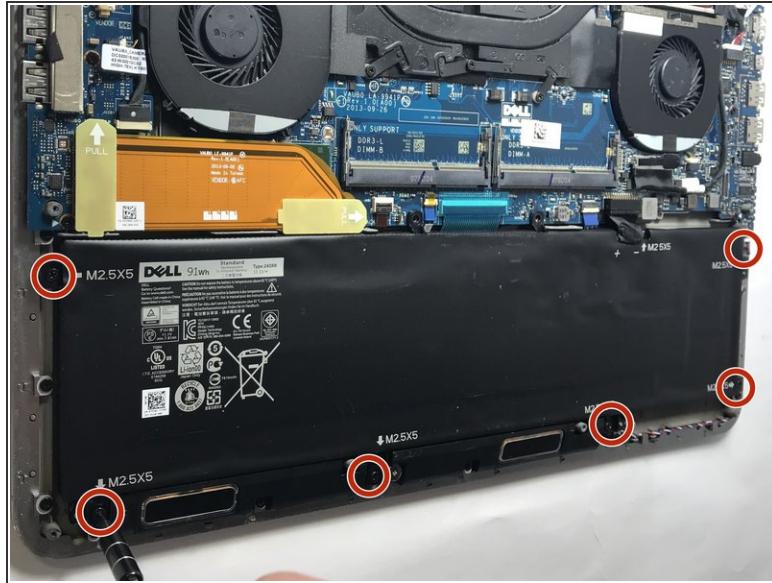

- Using a Phillips #0 screwdriver, remove the six 3.5mm screws that secure the battery to the palm rest assembly.

## Step 2

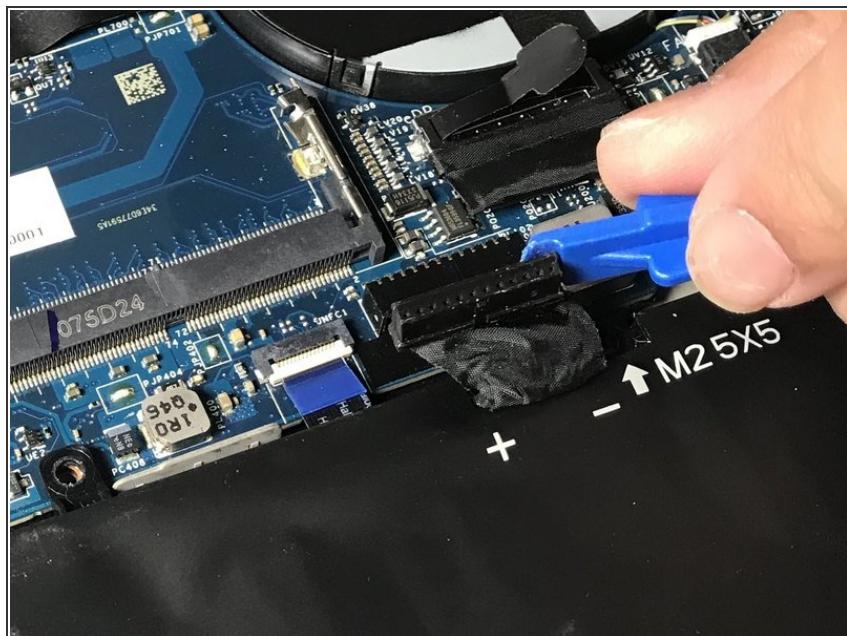

- Disconnect the battery cable from the system board.


**⚠** Be sure to use a plastic tool, not a metal one.

## Step 3




- Lift the battery off the chassis.

## Step 4 — Touch Pad

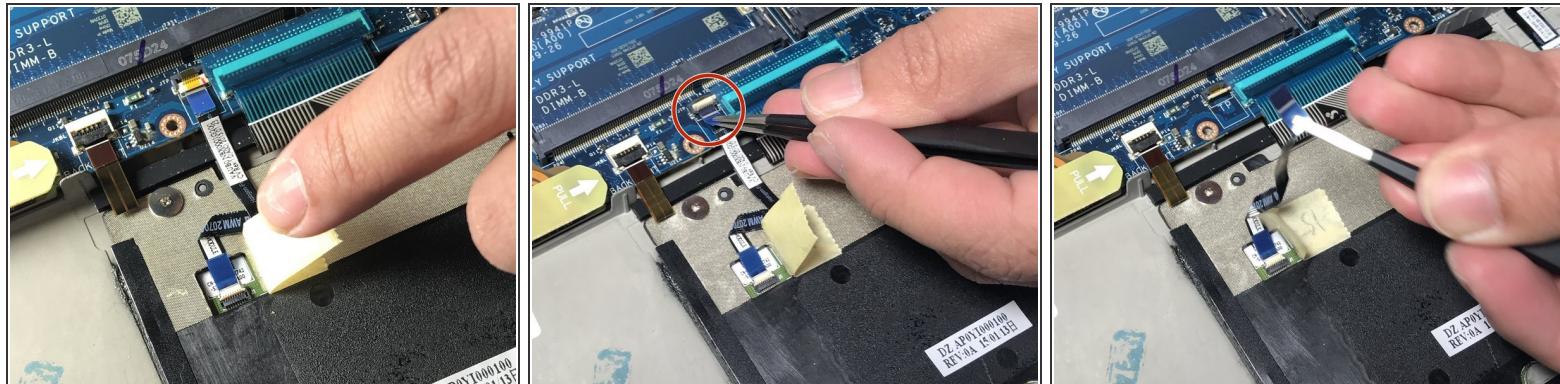

- Remove the touch pad ribbon cable by lifting the small plastic flap and pulling ribbon straight out of the connector.

## Step 5

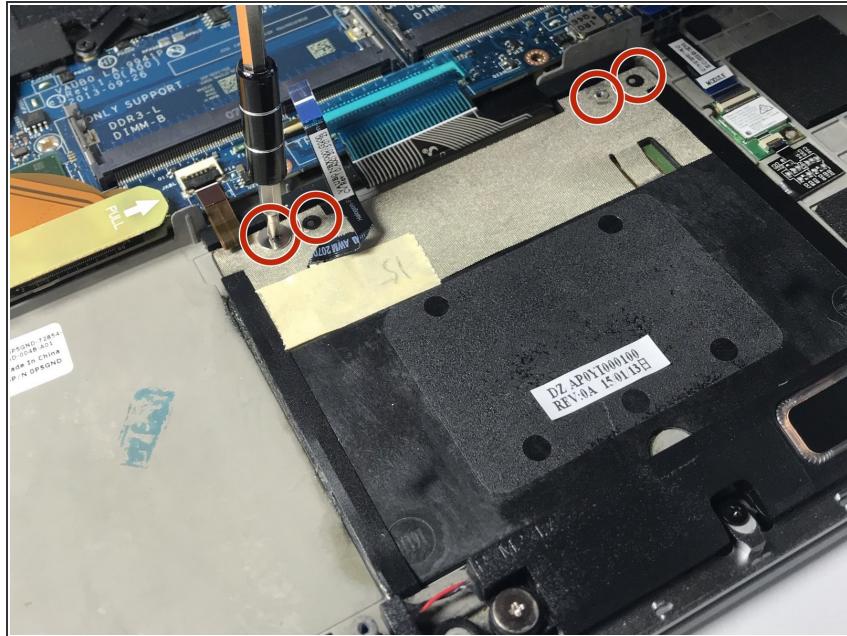

- Using a Phillips #0 screwdriver, remove the four 3mm screws holding in the touchpad assembly.

## Step 6



- Lift the bottom of the touchpad and pull directly out.

To reassemble your device, follow these instructions in reverse order.