




# Digital2 D2-912 Screen Replacement

To replace the screen of the tablet.

Written By: Lindsay Richardson

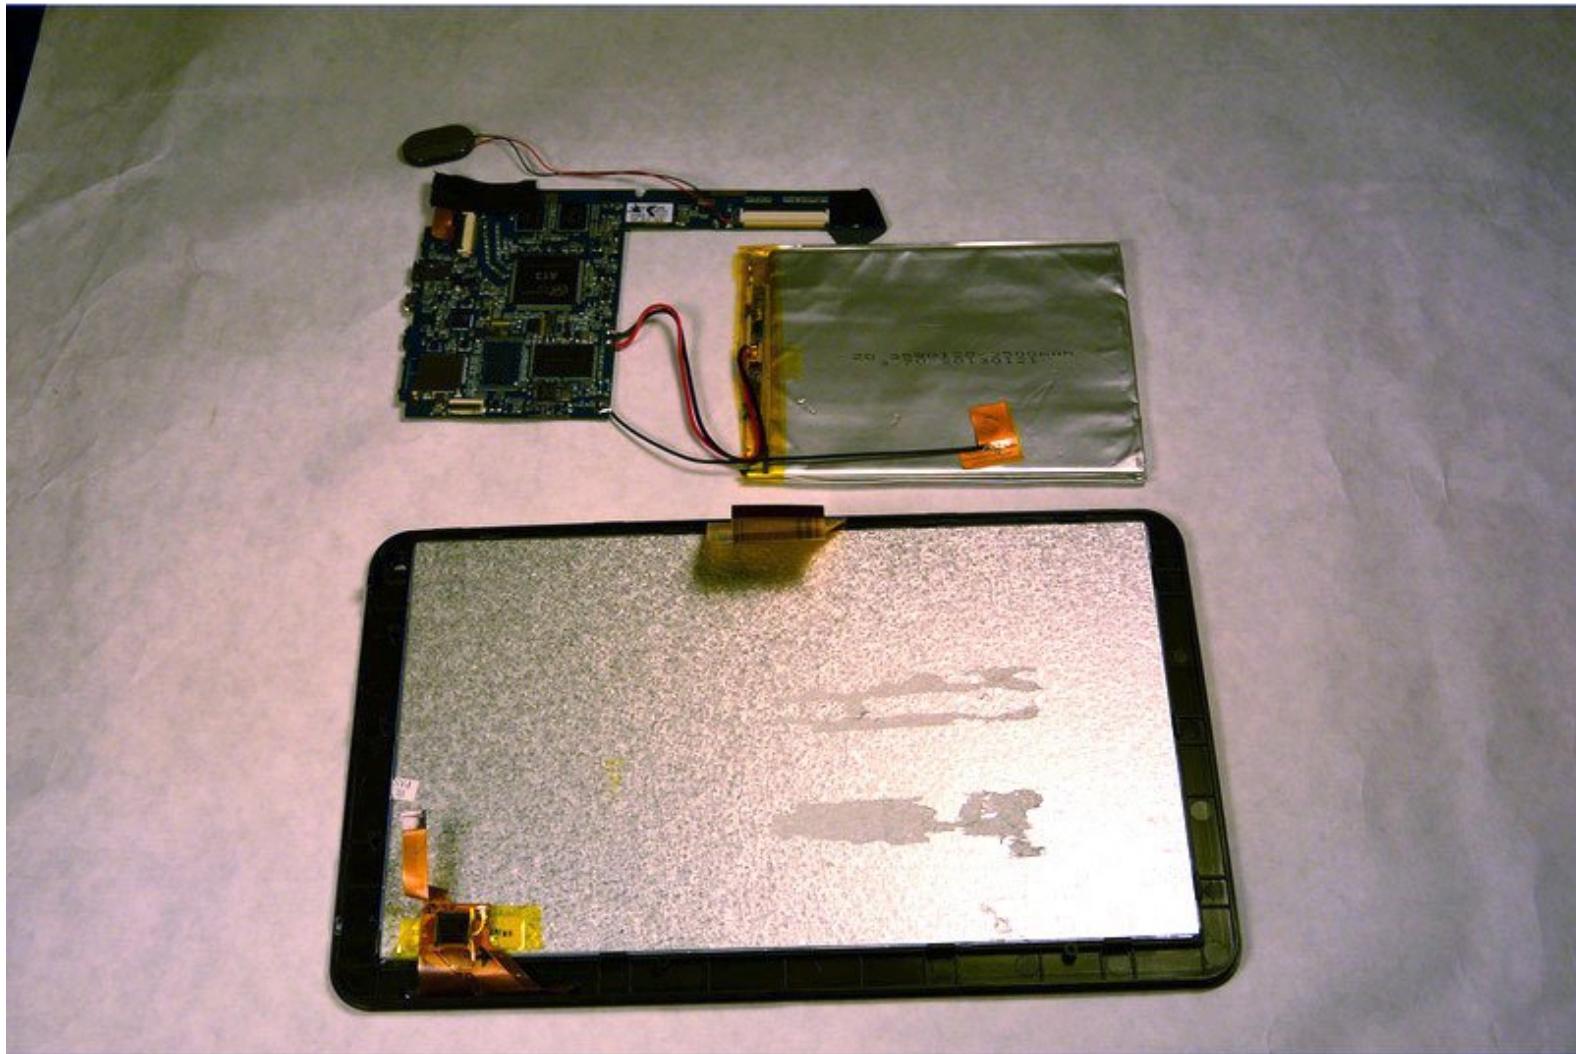


## INTRODUCTION

We will be replacing the screen in the tablet by first taking the tablet apart. Dropping the tablet with no cover or protection is likely to result in a cracked screen.

### TOOLS:


- [Phillips #00 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)
- [Metal Spudger](#) (1)

## Step 1 — External Cover

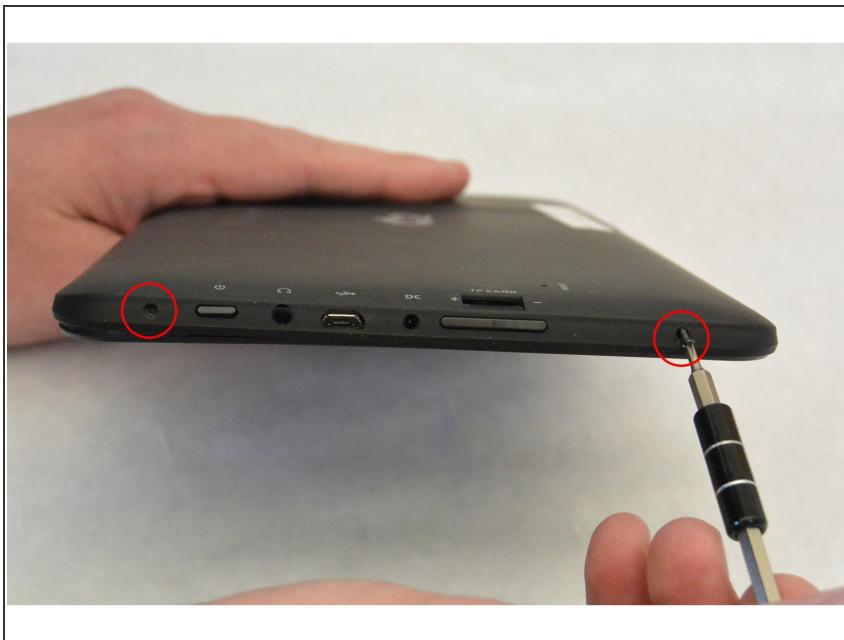

- Remove the two Phillips #00 screws from the bottom of the case.

## Step 2

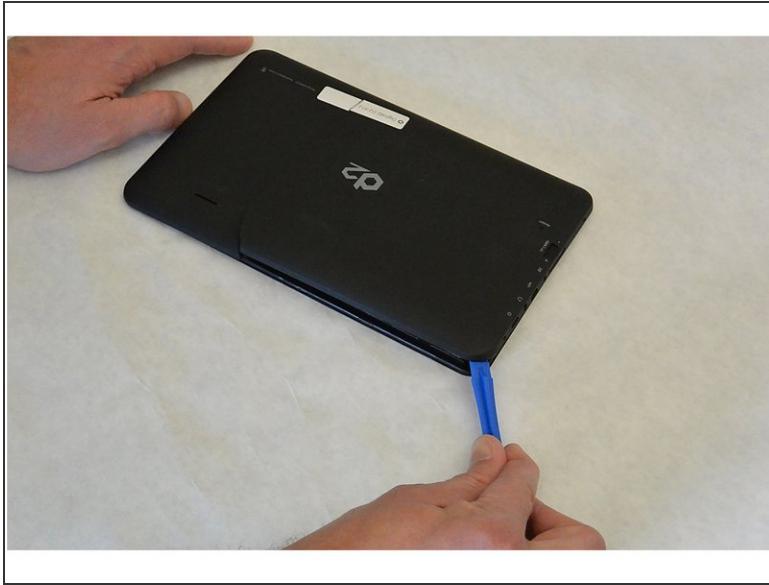

- Wedge the opening tool in the space between the back and the front of the tablet.
- Carefully work your way around the perimeter, wedging the opening tool between the front and back of the tablet.
- When the back of the tablet is mostly detached from the front, carefully pull it away completely.


This document was generated on 2019-09-22 06:24:23 PM (MST).

## Step 3 — Screen



- Be sure to remove the yellow tape that is holding the components down.
- Locate the two yellow ribbon cables and carefully remove by lifting the black tab connectors forward and slide out ribbon.
- When all components are unsecured, you will be able to remove the battery, motherboard, camera, and speaker out of the way.

## Step 4

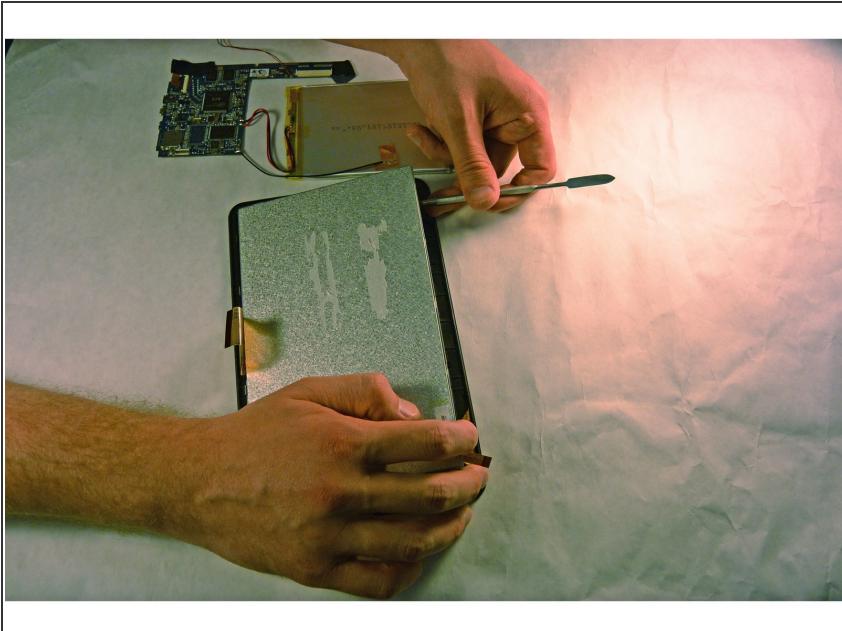

- Using the metal spudger, pry the display from the screen.

## Step 5



- The screen is now ready to be replaced by the new one

To reassemble your device, follow these instructions in reverse order.