




Digital2 D2-912 Speaker Replacement

To replace the speaker of the tablet.

Written By: Lindsay Richardson

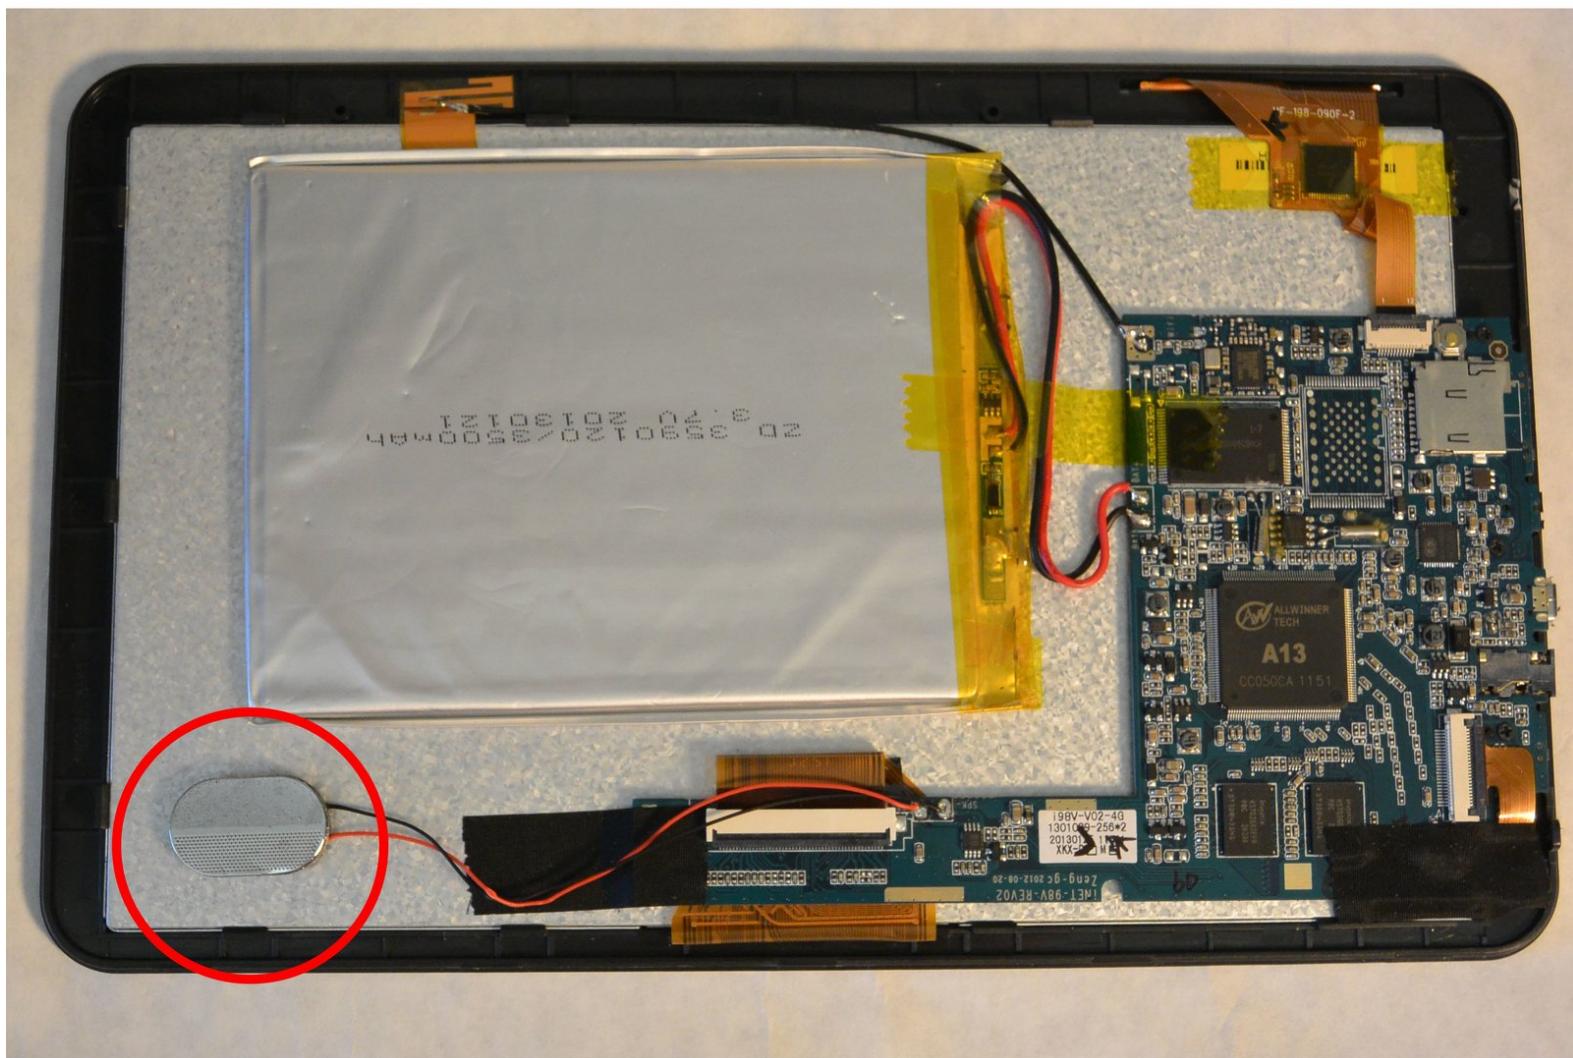


INTRODUCTION

We will be replacing the speaker in the tablet by first taking the tablet apart. Luckily it can be easily removed with wire cutters or a soldering iron.

TOOLS:


- [Phillips #00 Screwdriver](#) (1)
- [Soldering Iron](#) (1)
- [Solder Vacuum](#) (1)

Step 1 — External Cover

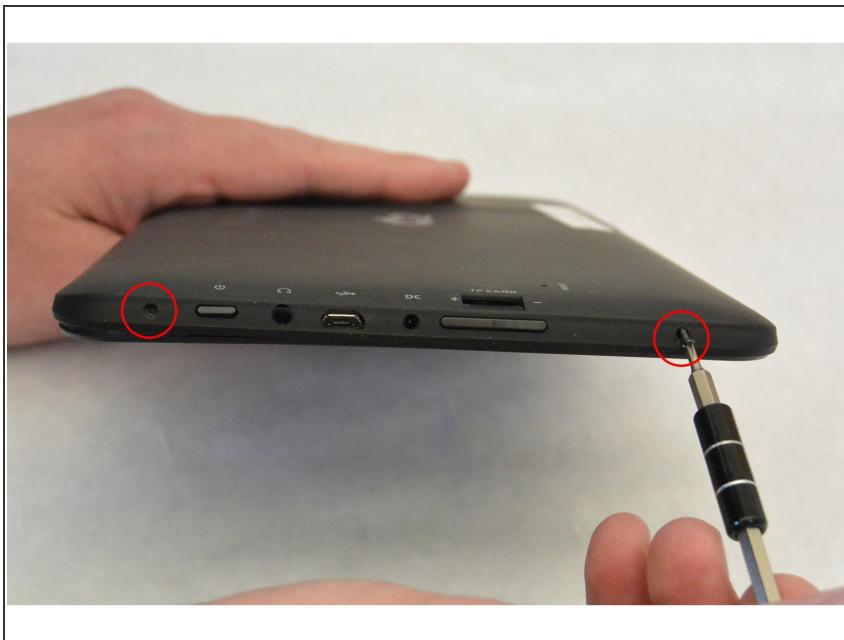

- Remove the two Phillips #00 screws from the bottom of the case.


Step 2

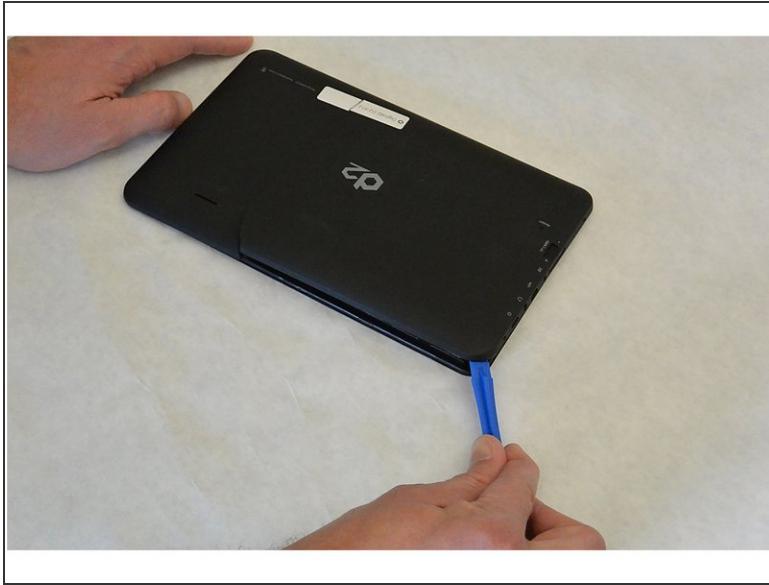

- Wedge the opening tool in the space between the back and the front of the tablet.
- Carefully work your way around the perimeter, wedging the opening tool between the front and back of the tablet.
- When the back of the tablet is mostly detached from the front, carefully pull it away completely.


This document was generated on 2019-10-01 03:10:03 PM (MST).

Step 3 — Speaker

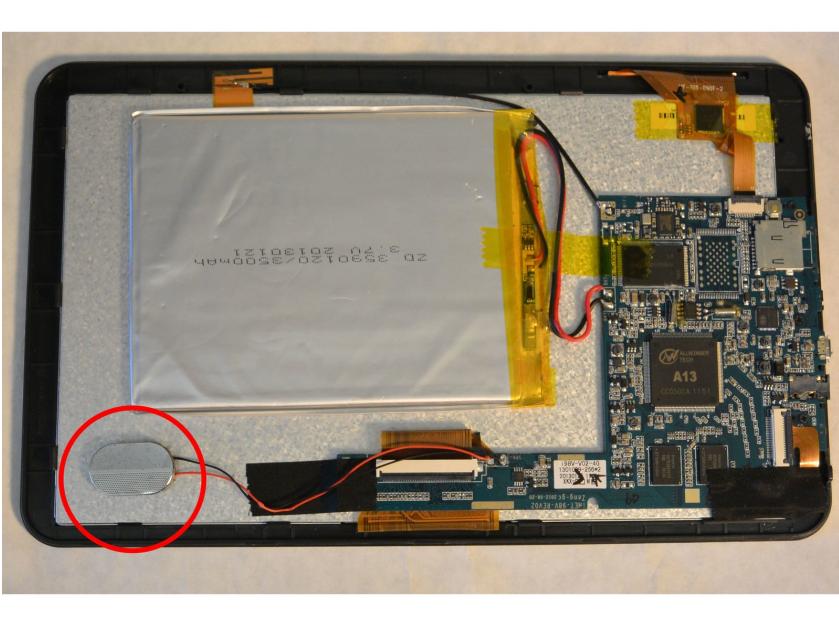

- Pull the speaker away from the tablet. It should easily come off, as it is held on with a magnet.

Step 4

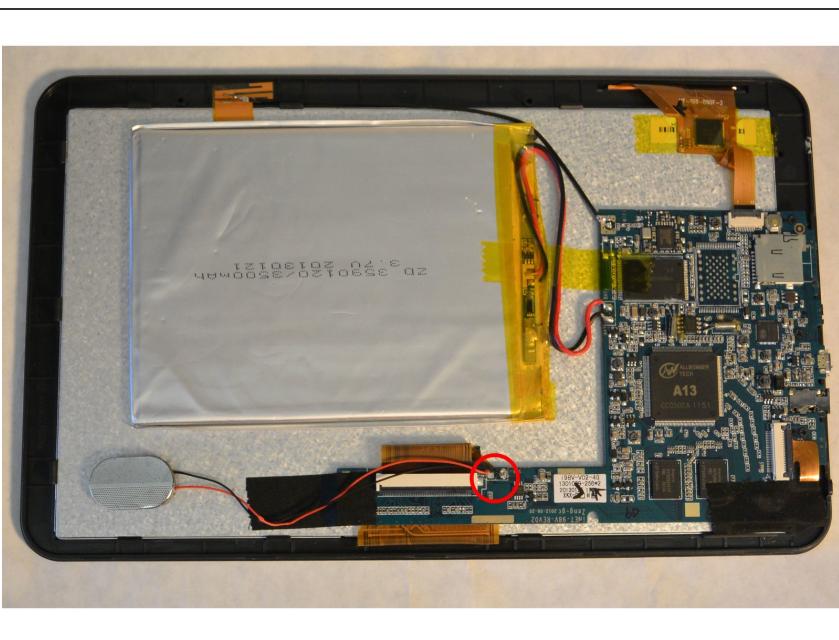

- Remove the wires from the motherboard using a soldering iron and a solder sucker.
- Refer to ifixit's [soldering guide](#) to remove the solder on the wires.

To reassemble your device, follow these instructions in reverse order.