




Disassembling Apple IIc Cover

Getting a look inside your computer.

Written By: Alexandria Weinberg

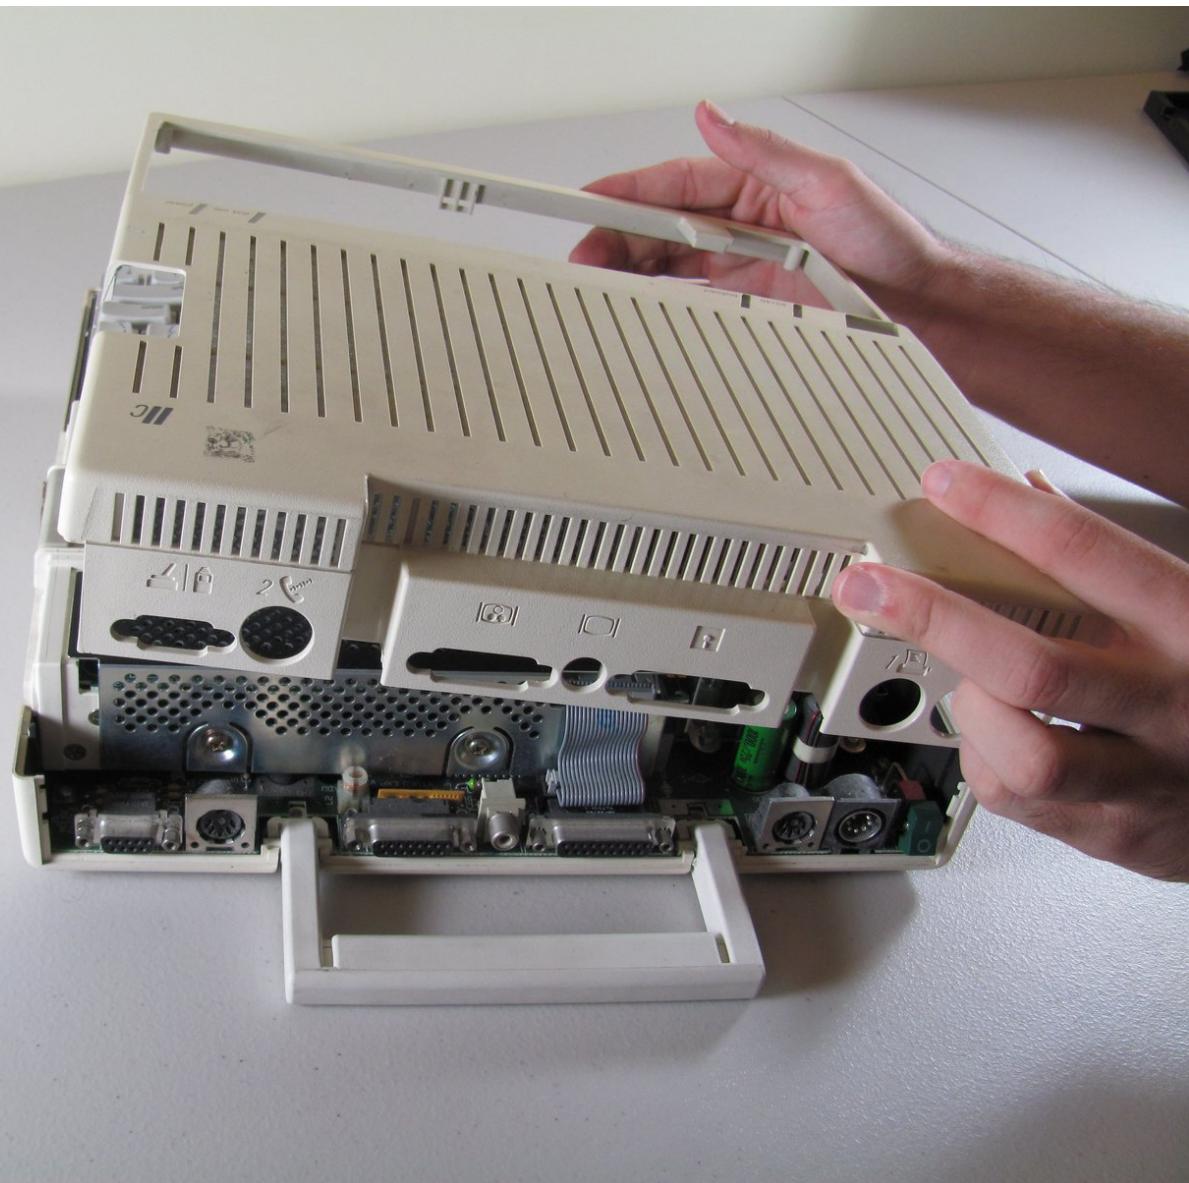

INTRODUCTION

Removing the cover of the Apple IIc is the precursor to any repair on a computer and it allows you to view the eternal workings of this device.

TOOLS:

- [Phillips #2 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)

Step 1 — Cover




- Remove the six 19 mm long screws with a #2 Phillips head screwdriver.

Step 2




- Release the catch by pushing it in using a plastic opening tool.
- The catch is off-center, but in line with the middle of the speaker underneath.

Step 3

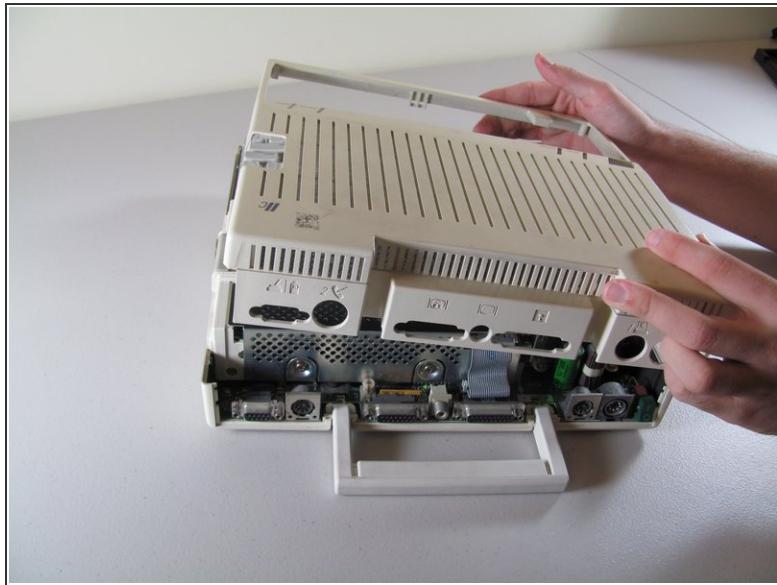

- Slide the case toward the ports on the back, then grip under the catch and pull up while moving toward the ports to remove.

Step 4

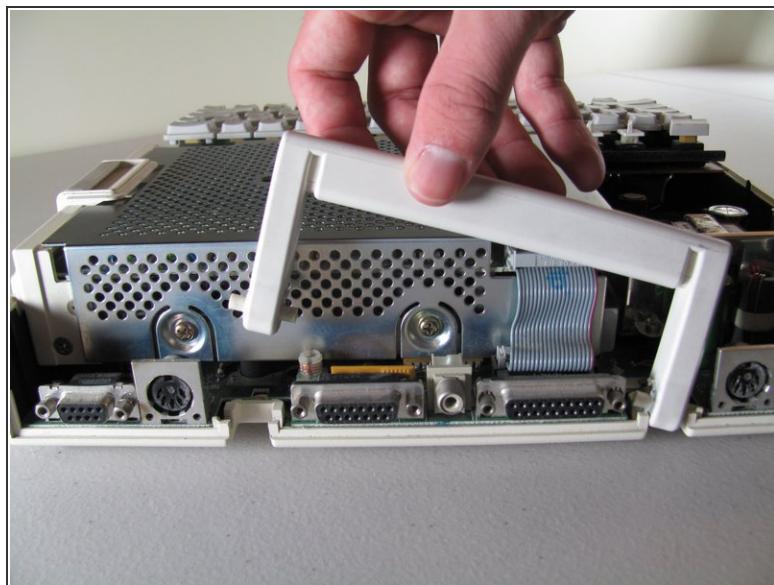

- Lift the handle straight up to remove.

To reassemble your device, follow these instructions in reverse order.