




# Disassembling Canon EOS Rebel XS Top Panel

Use this guide to remove the top panel of the camera.

Written By: Daniel Bussone

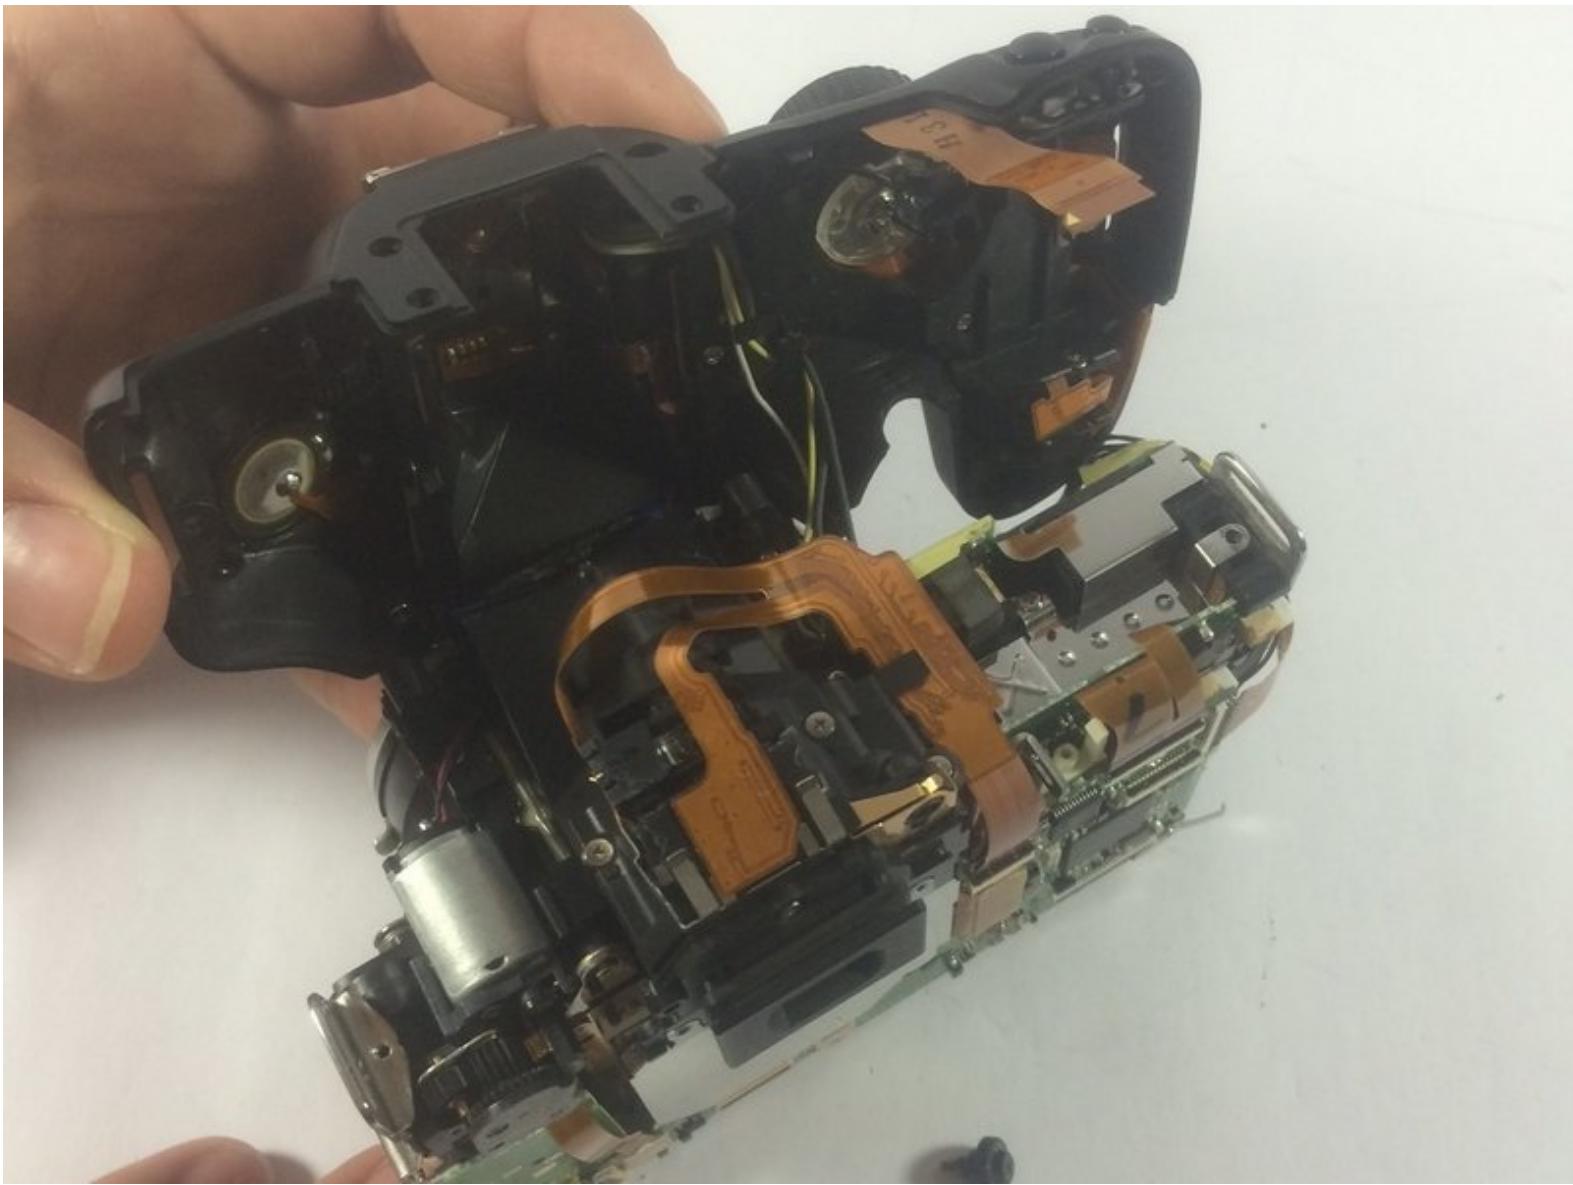

## INTRODUCTION

Use this guide to remove the top panel of the camera.

### TOOLS:


- [Phillips #00 Screwdriver](#) (1)
- [Spudger](#) (1)
- [Tweezers](#) (1)

## Step 1 — Latch Side Cover



- Remove the two 3mm (1/8") black screws from the side cover using a #00 Phillips screwdriver.

## Step 2

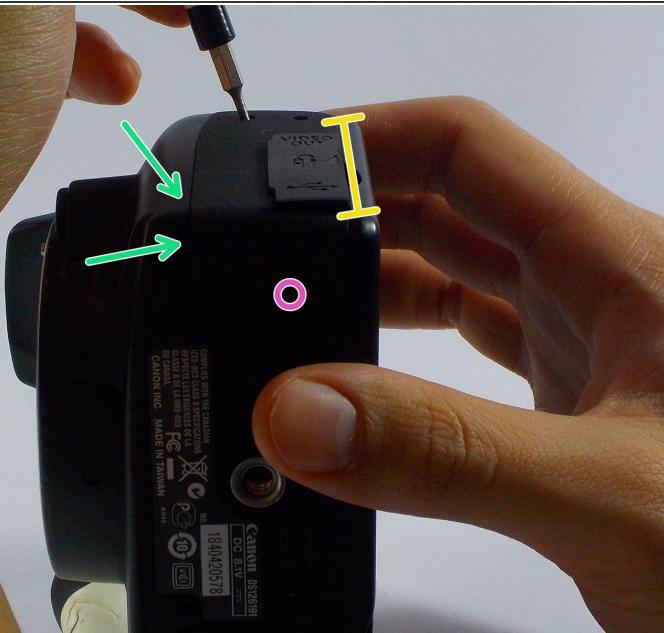

- On the bottom, remove the 6mm (13/64") screw with the #00 Phillips Screwdriver.
- Pry up the panel; starting from the front/bottom corner, as indicated.
  - There's a concealed lip, under the opposite edge.

## Step 3 — Disassembling Canon EOS Rebel XS Front Cover



- Remove three medium length screws from the bottom of the camera

## Step 4



- Remove the two medium length screws on the front panel of the camera above the lens mount.
- Once you done, you may use the Spudger to panel from non-grip side.


**i** If you start on the grip side, it will be more challenging to loosen the panel.

## Step 5 — Back Cover




- Remove the three long black screws from the bottom using a #00 Phillips screwdriver.
- Use tweezers to lift the panel.

## Step 6

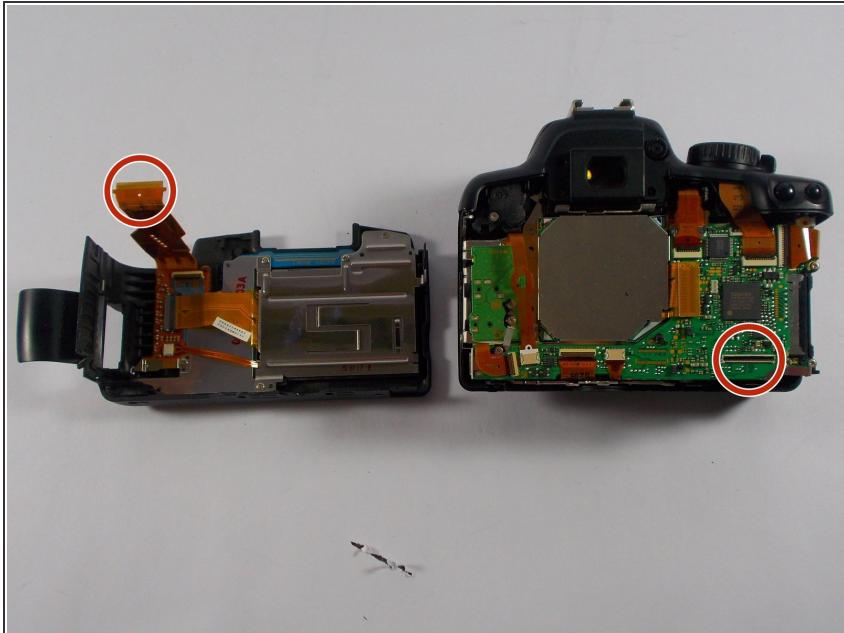


- Once you have detached the back cover, use a pair of tweezers to lightly pull on strap found connecting the back cover to the camera.

## Step 7 — Top Panel

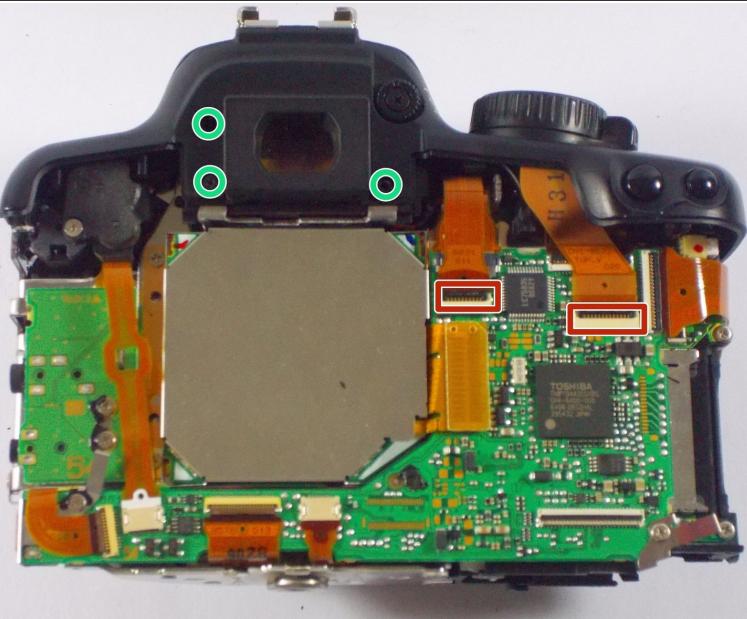

- Remove the following ribbons with the tweezers by gently pulling on them.
- Remove the three black screws, near the eye piece, using the Phillips Screwdriver.


## Step 8

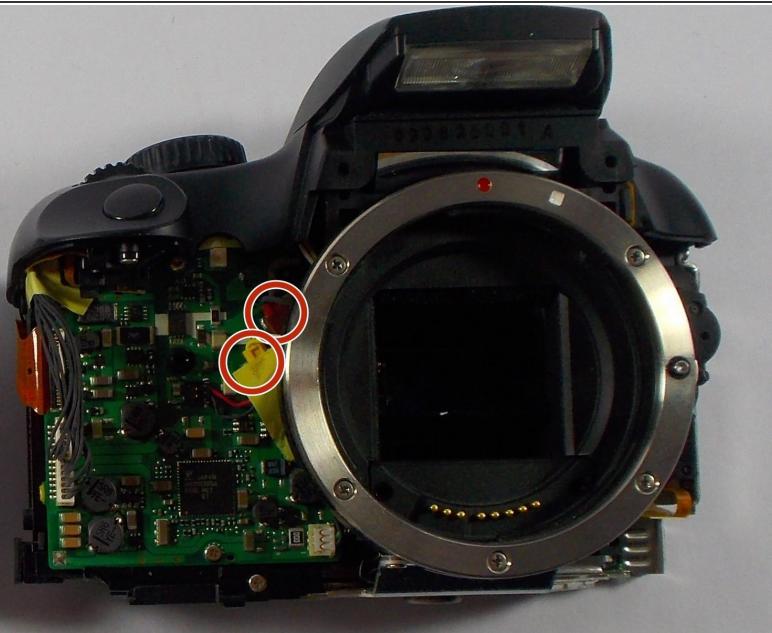

- Remove the cable heads attached on the front side of the camera next to the lens mount.

**⚠** Be gentle when pulling wires loose, use the tweezers to remove the wires.

## Step 9

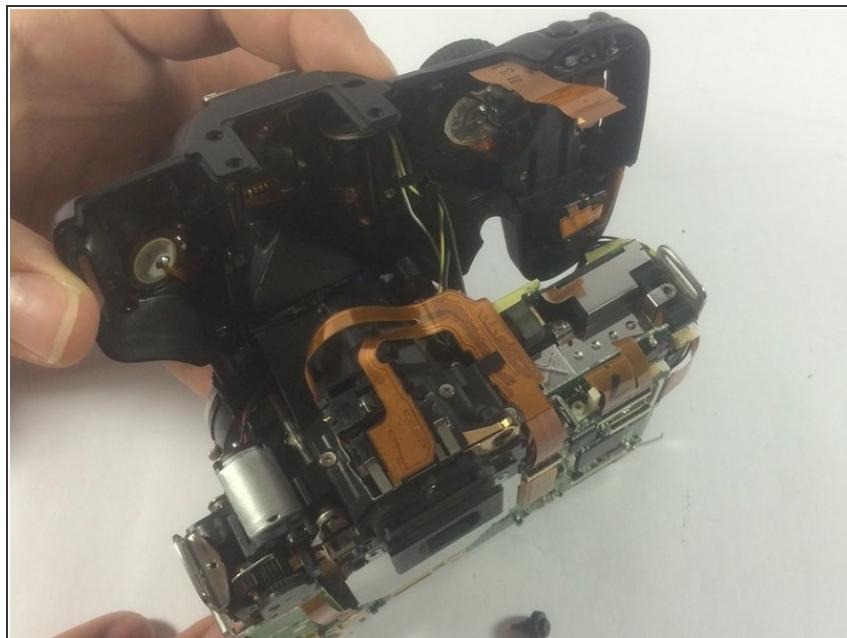

- You can use your fingers to pull the top panel of the camera.

To reassemble your device, follow these instructions in reverse order.