




# Disassembling Cr-48 Chromebook Bottom Casing

Opening up the laptop to get to the important pieces inside.

Written By: Robert McLaughlin

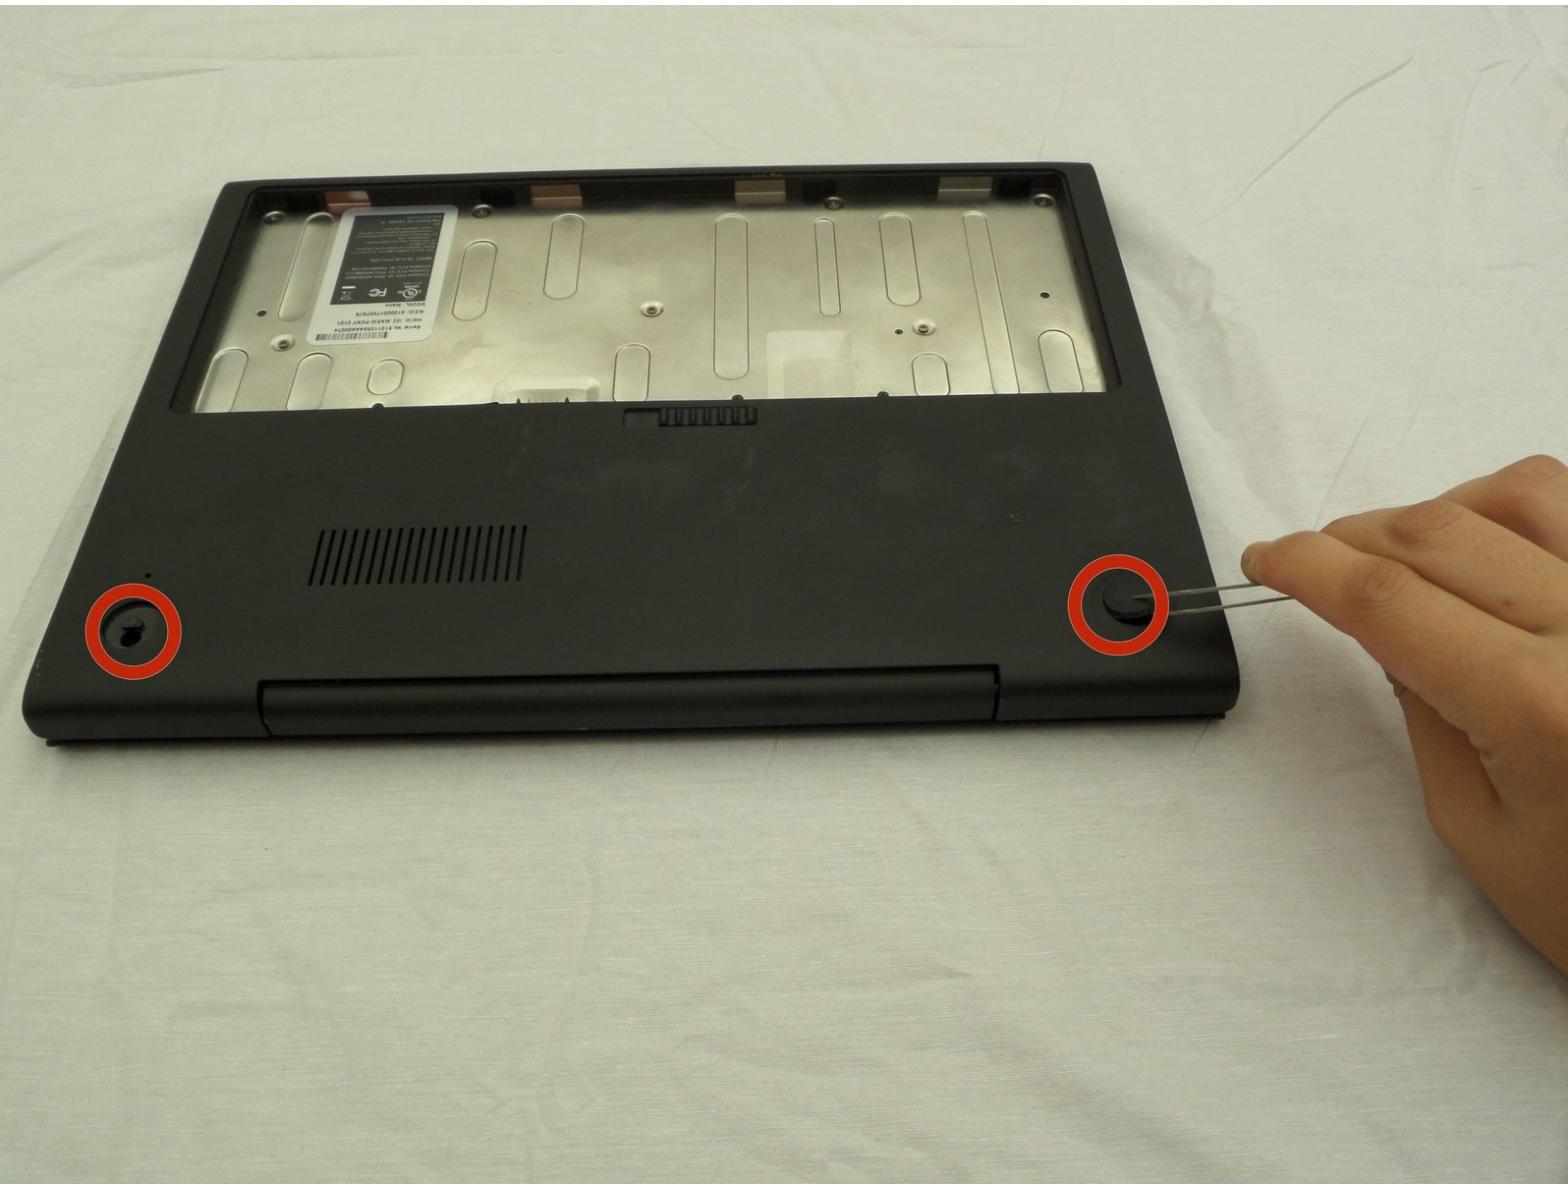

# INTRODUCTION

Before starting, please:

- make sure nothing is attached (such as AC adapter, USB, VGA, audio jack).
- remove any inserted SD card.



## PARTS:

- [Phillips #00 Screwdriver](#) (1)
- [Tweezers](#) (1)

## Step 1 — Remove the Battery



- Slide the switch on the bottom of the laptop until the battery pops out.
- Once the battery pops out, you can remove it.

## Step 2 — Remove Rear Rubber Feet




- Using forceps or tweezers, remove the two rear rubber feet to expose two hidden screws.

## Step 3 — Remove Screws



- Using a Phillips head #00 Screwdriver, remove a total of 12 screws:
  - 10 screws in the battery compartment.
    - size ph#00, approximately 3 mm long
  - 2 screws under the rubber feet previously removed
    - Size ph#00, approximately 4.5 mm long

## Step 4

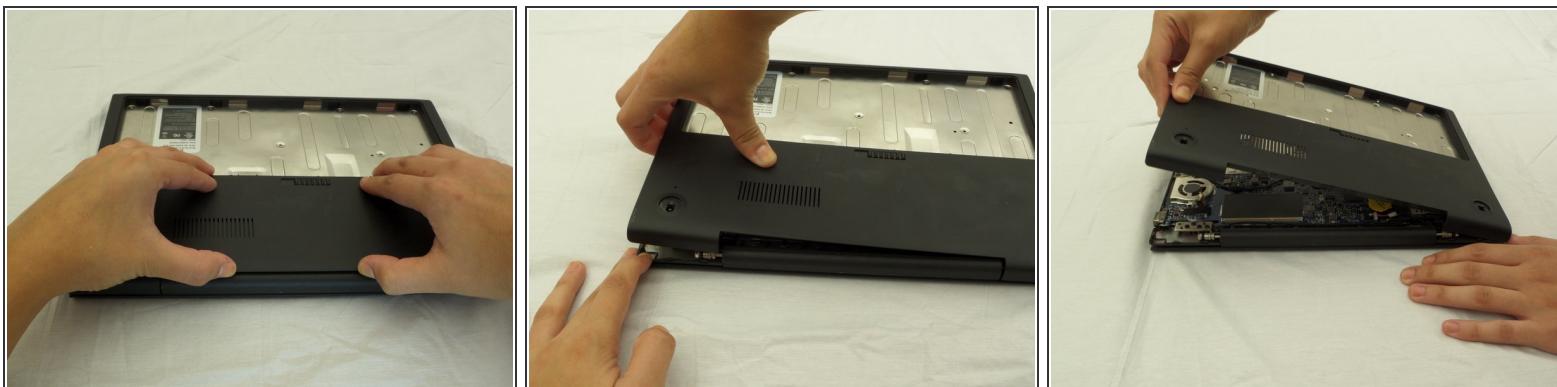

- Starting where the body of the laptop and the laptop screen meet, pry apart the lower case from the rest of the laptop.
- *(i)* The case is easier to remove when separating in a clockwise motion, as seen in the pictures.

To reassemble your device, follow these instructions in reverse order.