



Disassembling HP Pavilion 11 x360 Bottom Case

Prerequisite Only This guide will lead you to remove the bottom cover of the laptop with ease.


Written By: Austin



 **TOOLS:**

- [iFixit Opening Tools \(1\)](#)
- [Spudger \(1\)](#)
- [Phillips #0 Screwdriver \(1\)](#)

Step 1 — Remove Screws

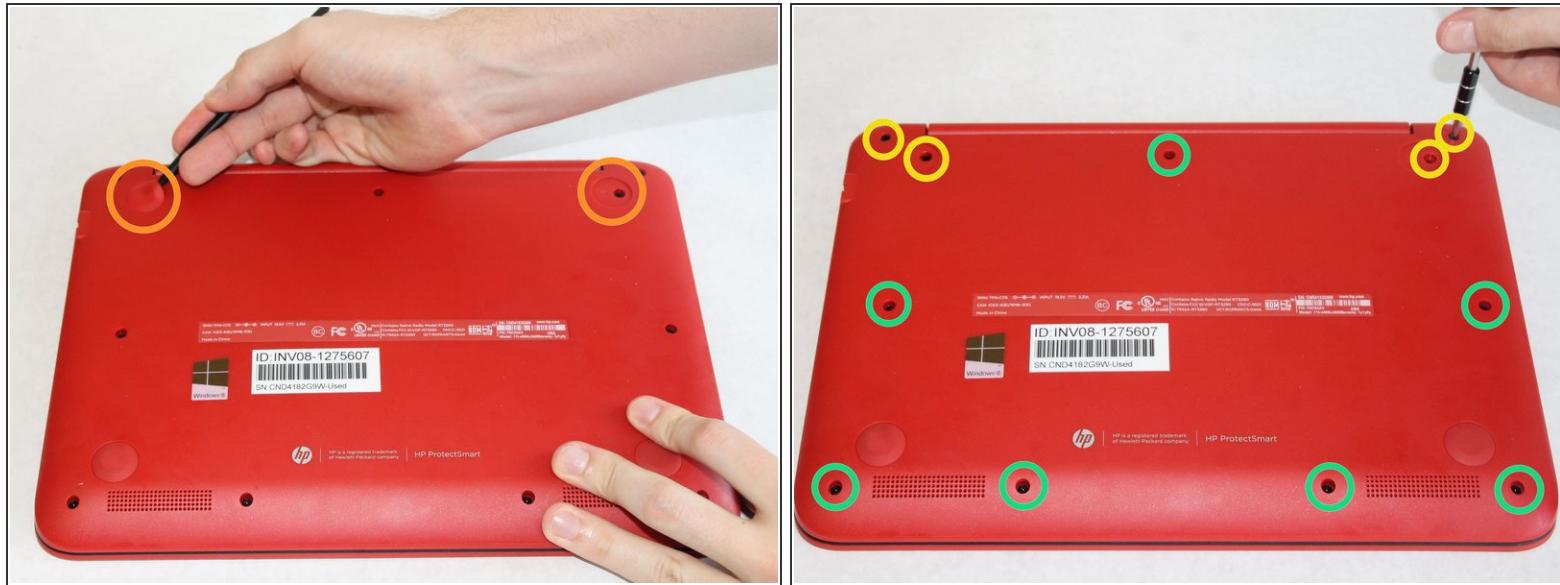

- Use the spudger to pry off the two rubber feet near the hinge of the laptop. This will reveal two hidden 9mm screws.
- You must remove eleven screws.
 - Four 9mm screws with the PH0 screwdriver.
 - Seven 6mm screws with the PH0 screwdriver.


Step 2 — Remove Backing



- Use the spudger to pry the corners of the laptop near the display hinges.
- Pry around the seam of the laptop with the plastic opening tool until the backing begins to pull apart.

⚠ When you lift the bottom cover, there is a cable connected between the motherboard and the bottom cover. Be careful not to pull the cable loose!

Step 3 — Detach Cable

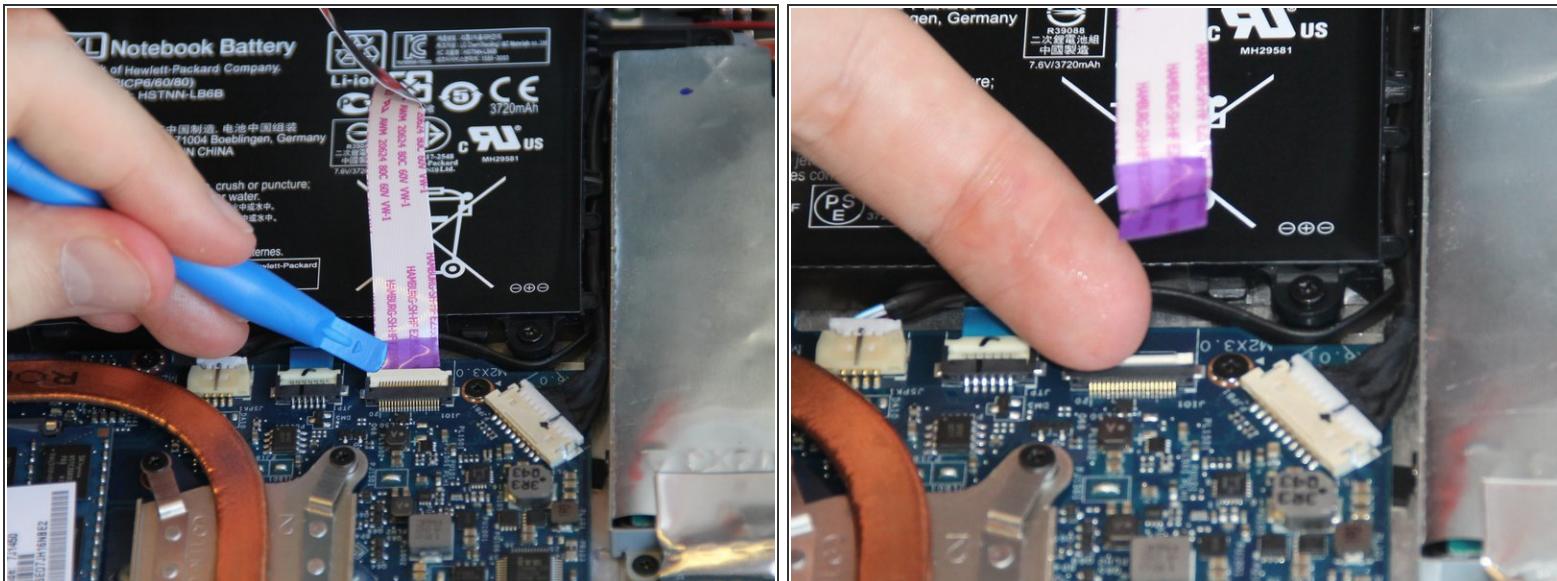

- Use the plastic opening tool to lift the white tab up at the connection.
- Pull the cable outwards.

To reassemble your device, follow these instructions in reverse order.