



# Disassembling HTC ONE V Bottom Assembly

This will be a prerequisite to opening the phone.

Written By: Michael Lucido



 **TOOLS:**

- [Phillips #0 Screwdriver \(1\)](#)
- [iFixit Opening Tools \(1\)](#)

## Step 1 — Disassembling HTC ONE V Bottom Assembly





- Power off your device.
- Remove the bottom cover by sliding it off.

## Step 2




- Remove the SIM card.
- Remove the four screws securing the bottom casing.
  - Two 3.0 mm Phillips #0 screws in the top left and right corners.
  - Two 2.0 mm Phillips #0 screws in the bottom left and right corners.

## Step 3

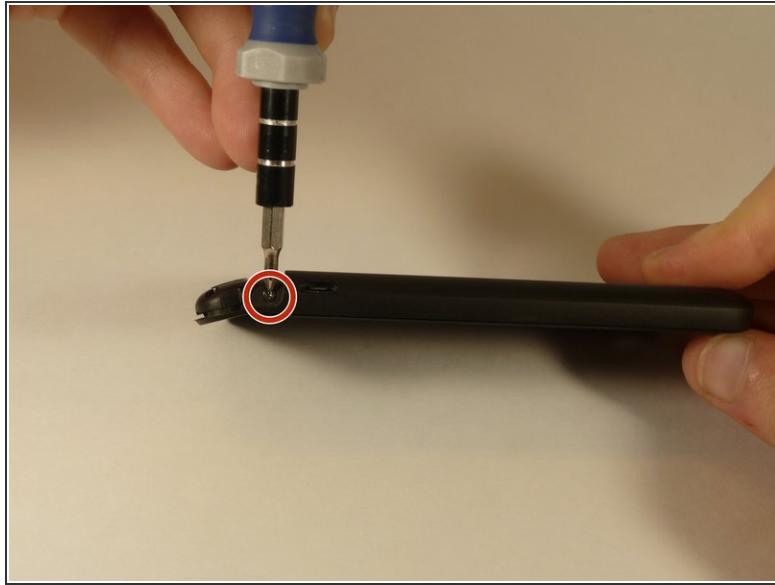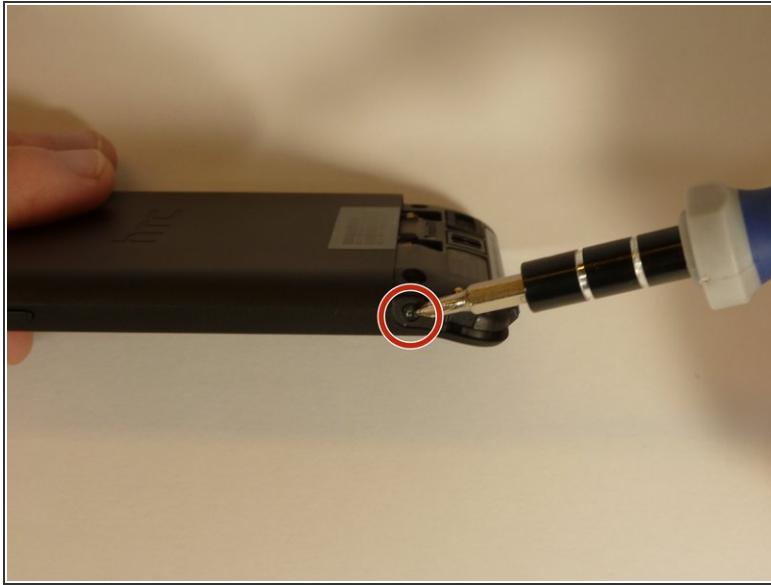

- Remove the 2.0 mm Phillips #0 screws on either side of the phone.

## Step 4

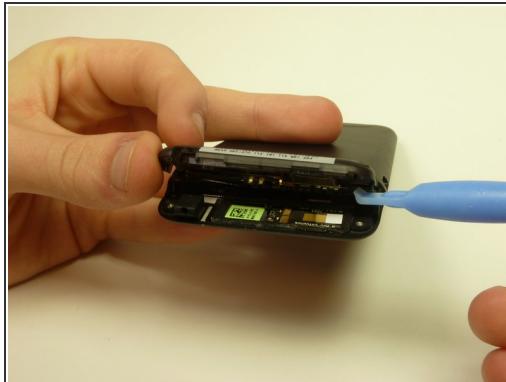

- Use a plastic opening tool to pry open the bottom casing.
- Remove the bottom casing by pulling it towards you.

To reassemble your device, follow these instructions in reverse order.