




# Disassembling KDDI Kyocera A5521K Camera

Written By: Dominic Grisafe

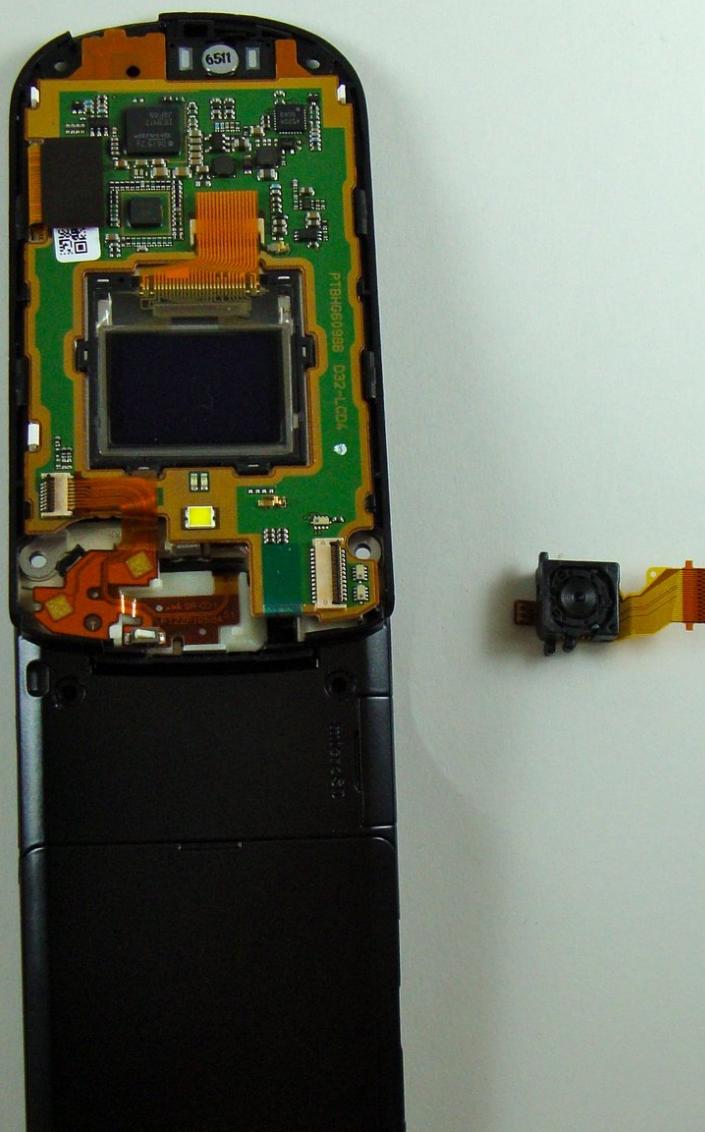


## INTRODUCTION

These instructions will demonstrate how to remove the camera from the KDDI Kyocera A5521K.

### TOOLS:

- Tweezers (1)
- iFixit Opening Tools (1)
- Tri-point Y0 Screwdriver (1)
- Push Pin (1)

## Step 1 — Faceplate

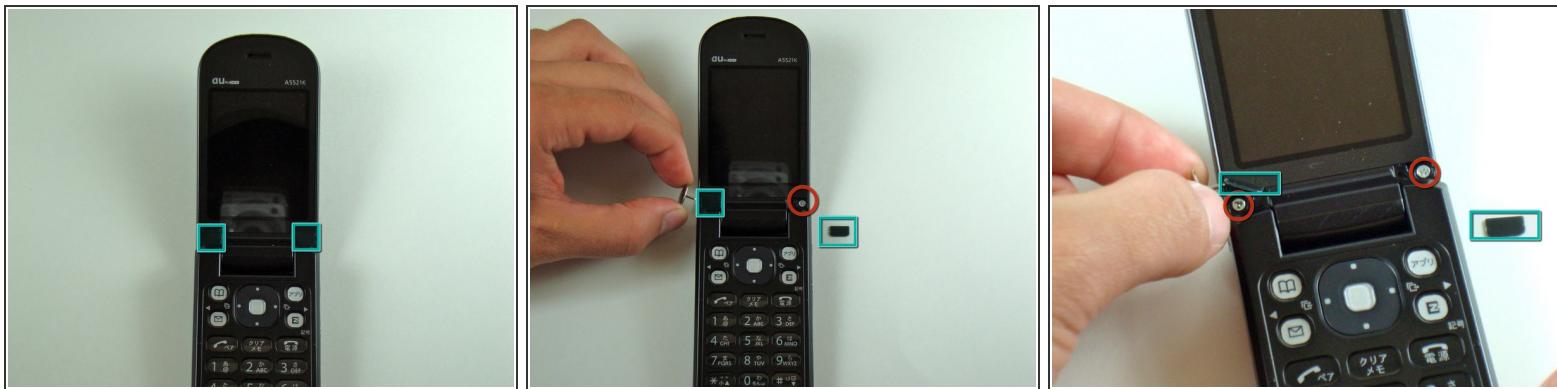

- Pry, with a metal probe, the black covers that are located by the pivoting joints of the phone.
- Beneath the covers are screws.

## Step 2



- Remove the screws using a Y0 screwdriver.

## Step 3



- Use the iPod pry tool to remove the outer screen.
- Two screws are now visible.


 Be careful not to crack the screen upon removal. It is adhered strongly to the phone.

## Step 4



- Use the Y0 screwdriver to remove the screws.

## Step 5

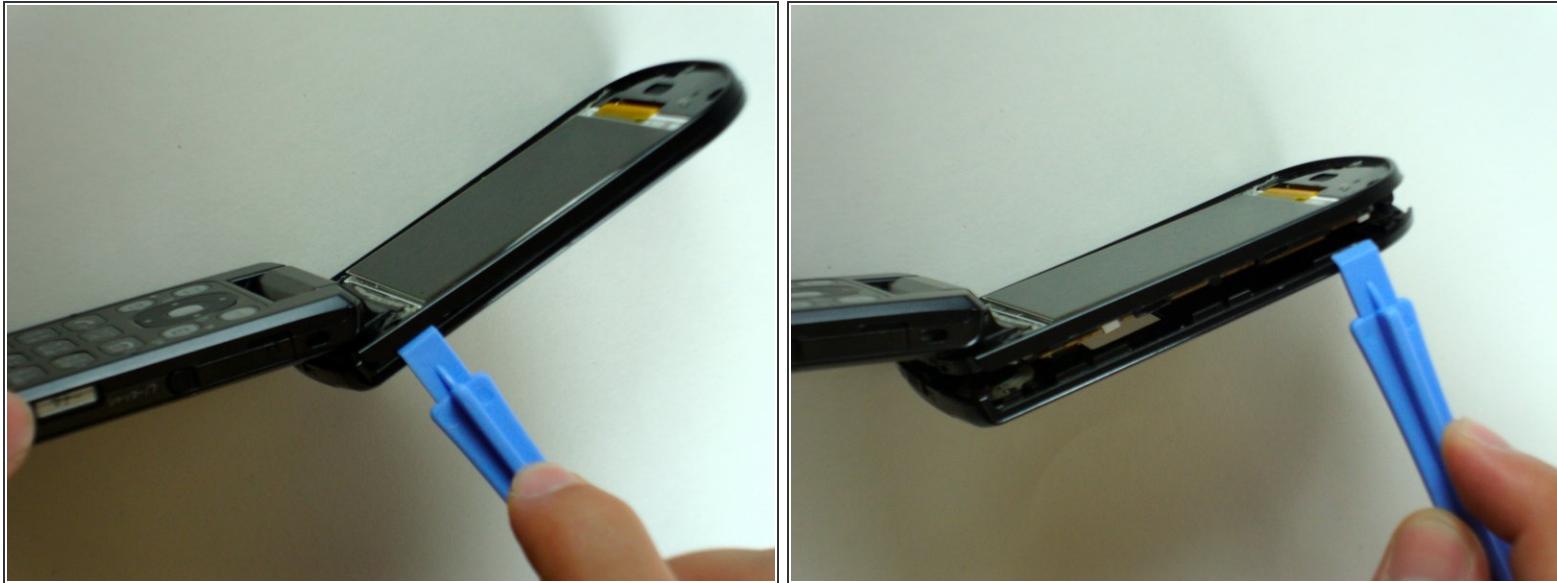


- Use the iPod pry tool to loosen the faceplate from the phone.
- *i* Slide the pry tool along the entire crease of the faceplate to completely detach it.

## Step 6



- Separate the faceplate from the phone.

## Step 7 — Camera

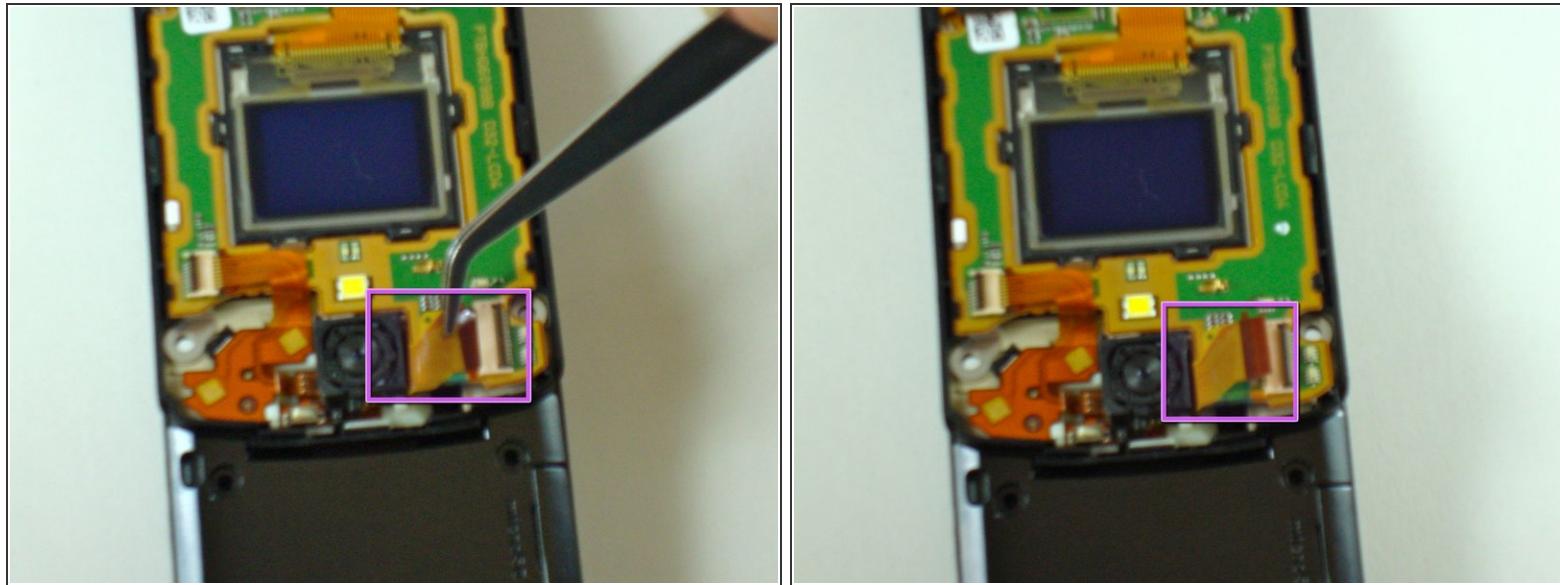

- Firmly grab the flexible circuit with tweezers to detach (or use your fingers if you can manage a firm grip).

## Step 8



- Carefully pry up the camera unit with a spudger.
- ⚠ Be careful not to damage the camera unit.
- The camera should now be separated from the phone.

To reassemble your device, follow these instructions in reverse order.