




Disassembling KDDI Kyocera A5521K Keyboard

Written By: Dominic Grisafe

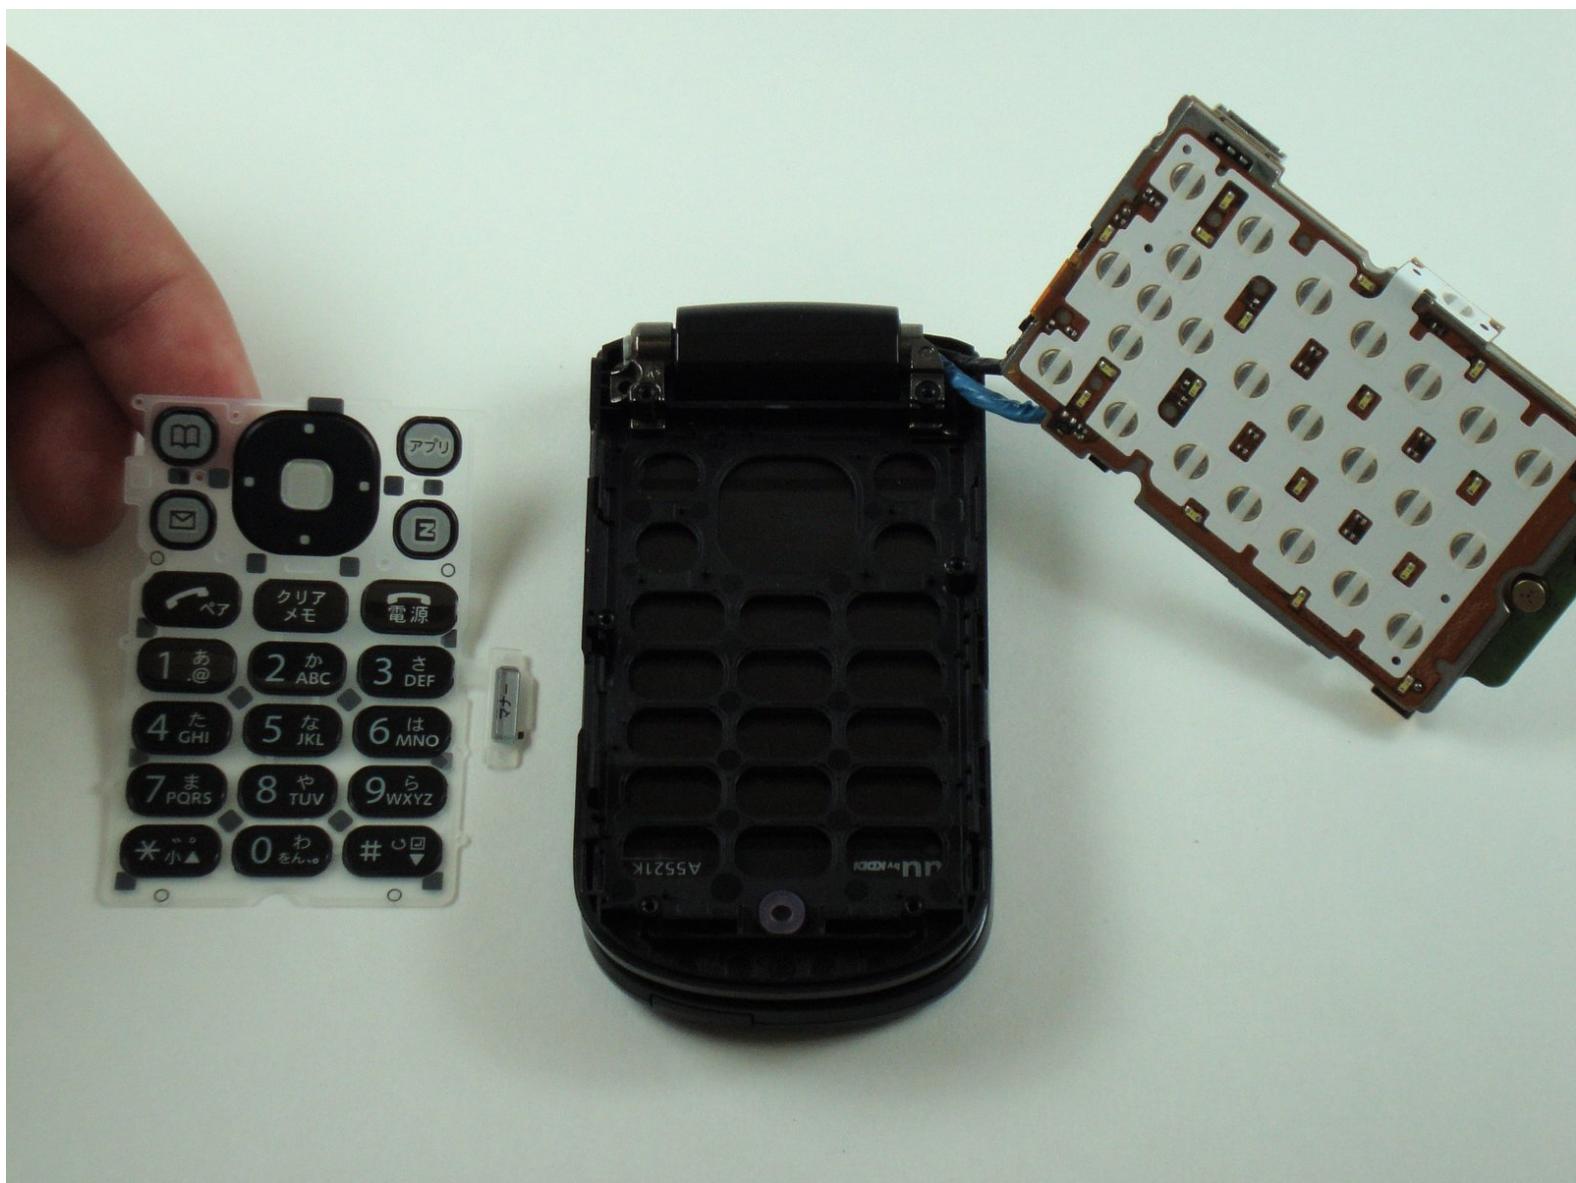

INTRODUCTION

These instructions will demonstrate how to remove the keyboard from the KDDI Kyocera A5521K.

TOOLS:

- [Spudger](#) (1)
- [Tri-point Y0 Screwdriver](#) (1)

Step 1 — Disassembling KDDI Kyocera A5521K Battery



- Turn the phone over to expose the battery cover.
- Apply pressure to the back of the battery cover to slide it down.
- The battery cover is now separate from the phone.

Step 2



- Remove the battery by pushing it up and out from the bottom.
- The battery, cover, and phone should now be separated.

Step 3 — Back Plate



- Remove the four screws with the Y0 screwdriver.

Step 4



- Remove the black, rubber screw caps towards the top of the back of the phone to reveal two additional screws.
- Remove the two screws with a Y0 screwdriver.

Step 5



- Rotate the phone 180 degrees.
- Carefully separate the back plate from the remainder of the phone.
- The back plate should now be detached from the rest of the phone.



Step 6 — Keyboard



- Lift up the bottom of the logic board.
- Carefully remove the logic board from the lower half of the phone.

⚠ The logic board is connected to the remainder of the phone by two cables at the upper right corner indicated by the red circle. Do not damage the cables.

Step 7

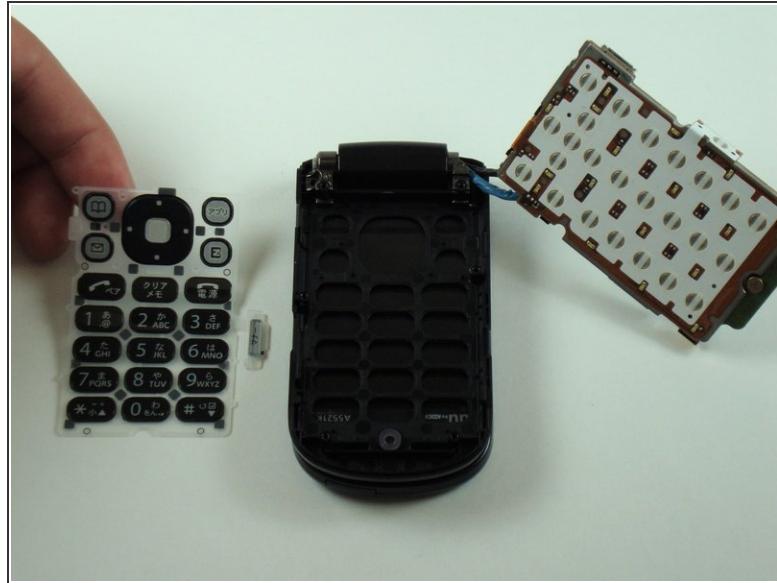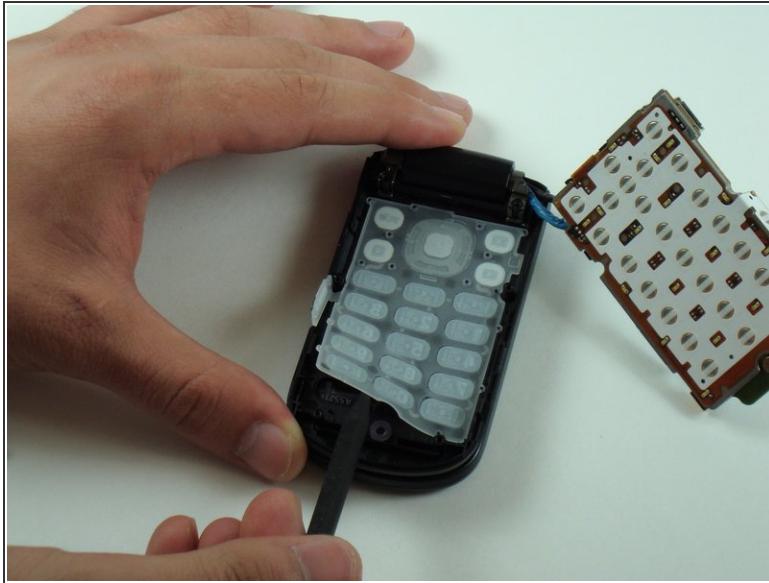

- Gently lift the keyboard up with a spudger.
- The keyboard is now separate from the remainder of the phone and can be easily removed.

To reassemble your device, follow these instructions in reverse order.