



# Disassembling Midland X-tra Talk Radio LXT118 Case

This is a prerequisite only! This explains how to remove back case.

Written By: James Tucker Dunn




## INTRODUCTION

After the batteries are removed the case can be disassembled.

### TOOLS:

- **Phillips #0 Screwdriver** (1)
- **Spudger** (1)

## Step 1 — Disassembling Midland X-tra Talk Radio LXT118 Batteries

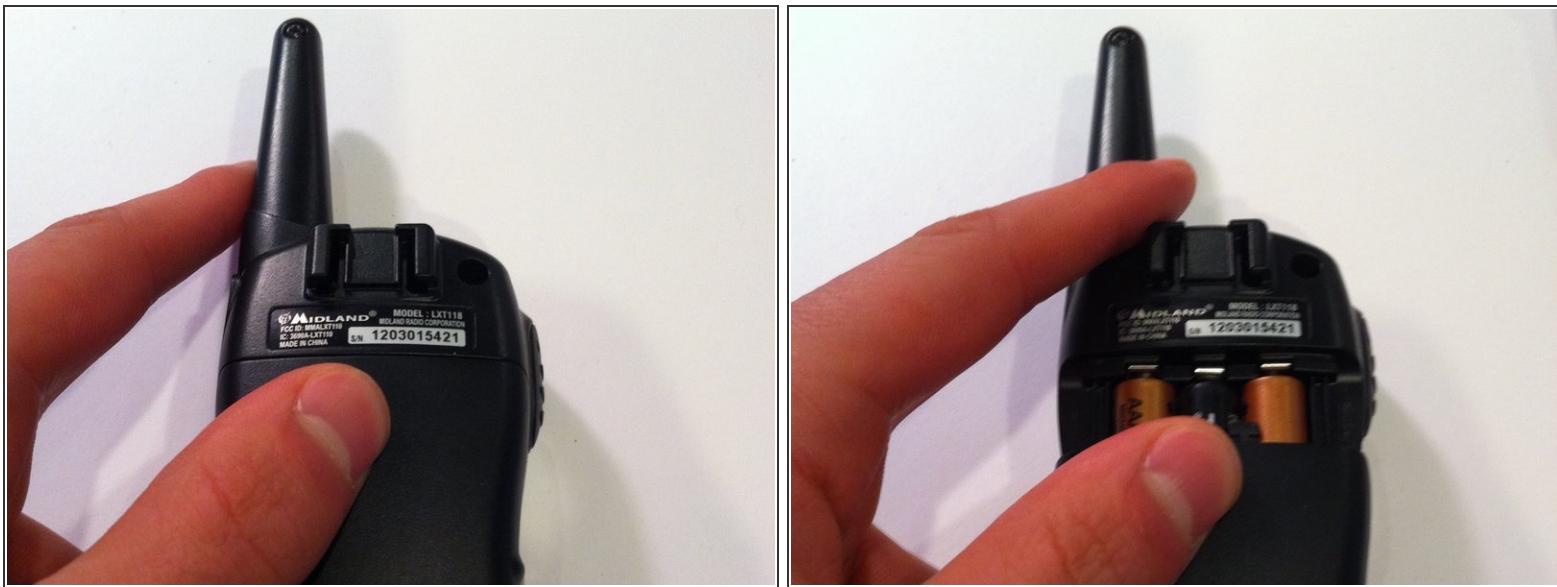


- First, apply pressure with your thumb on the top of the battery cover.
- Next, pull down on the cover until it begins to slide.

## Step 2




- Finally, once the cover is completely off, pry up the old batteries with your finger or a strong, skinny tool (i.e. spudger).

## Step 3 — Case

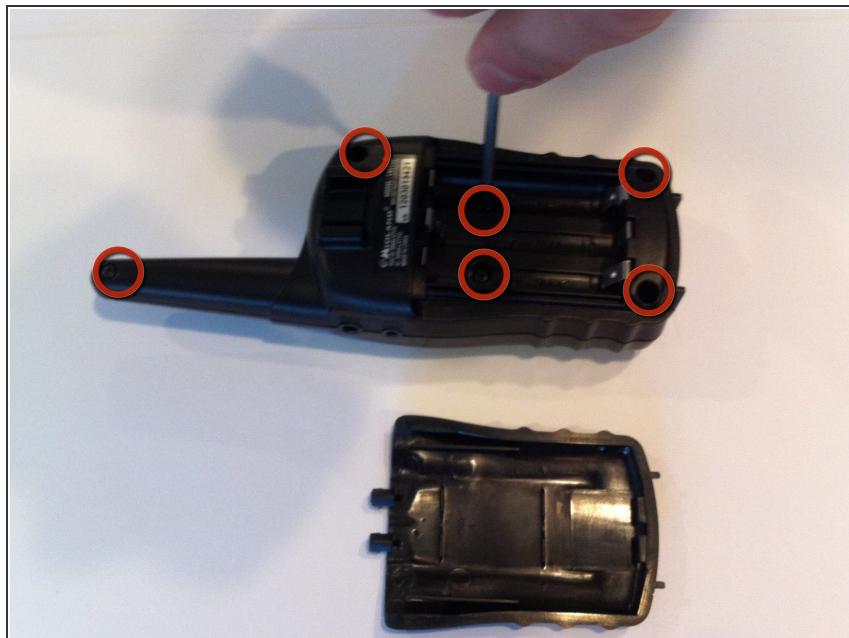

- Unscrew the six 8.0 millimeter long, #0 screws on the backside of the case using the Phillips #0 screwdriver.

## Step 4

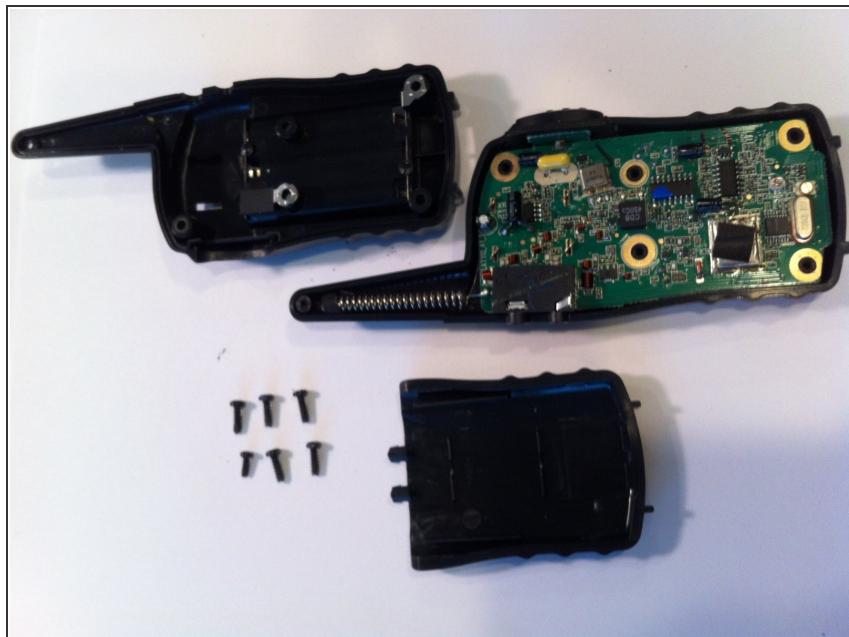

- Detach back part of the case by gently lifting up.

To reassemble your device, follow these instructions in reverse order.