



Disassembling Nokia 6236i Keypad

Written By: Erik Lindahl




INTRODUCTION

This guides you through removing the keypad.

TOOLS:


- 2.5 mm Flathead Screwdriver (1)

Step 1 — Disassembling Nokia 6236i Battery

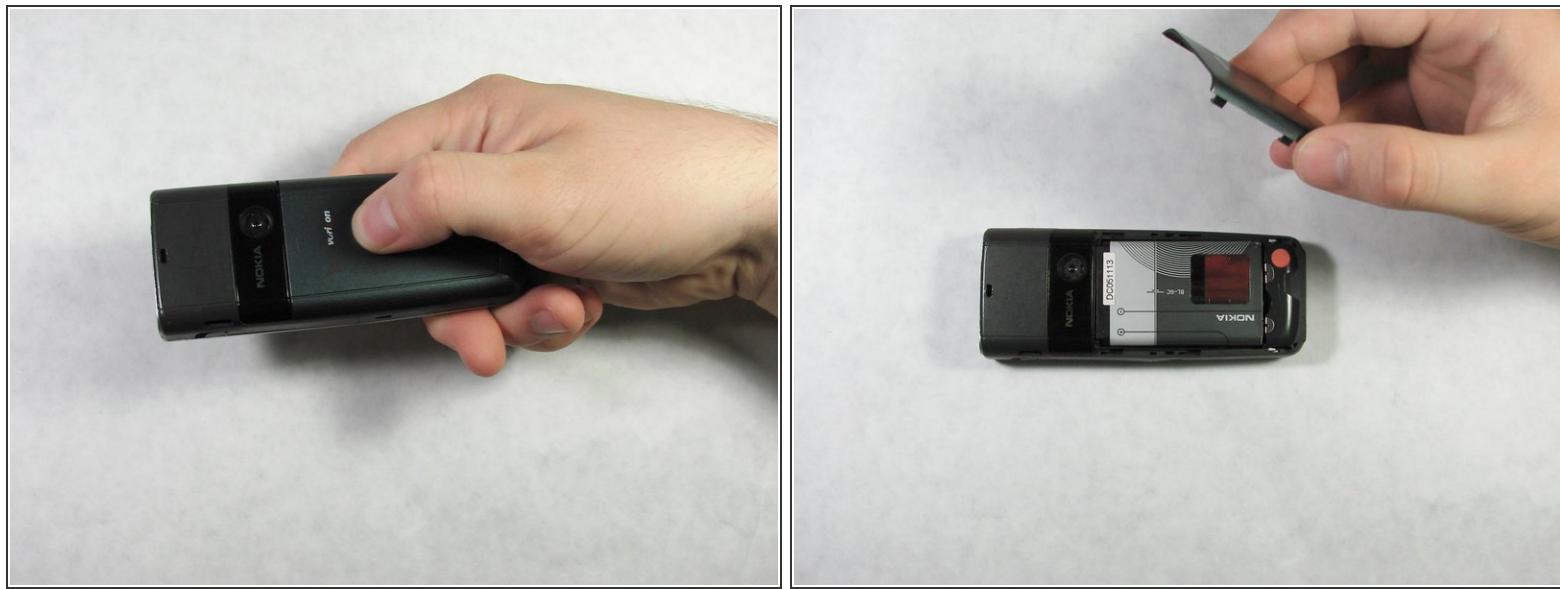

- Apply pressure to the battery casing (below the camera) with your thumb and pull towards the bottom of the phone.
- Lift the battery case off of the phone.

Step 2

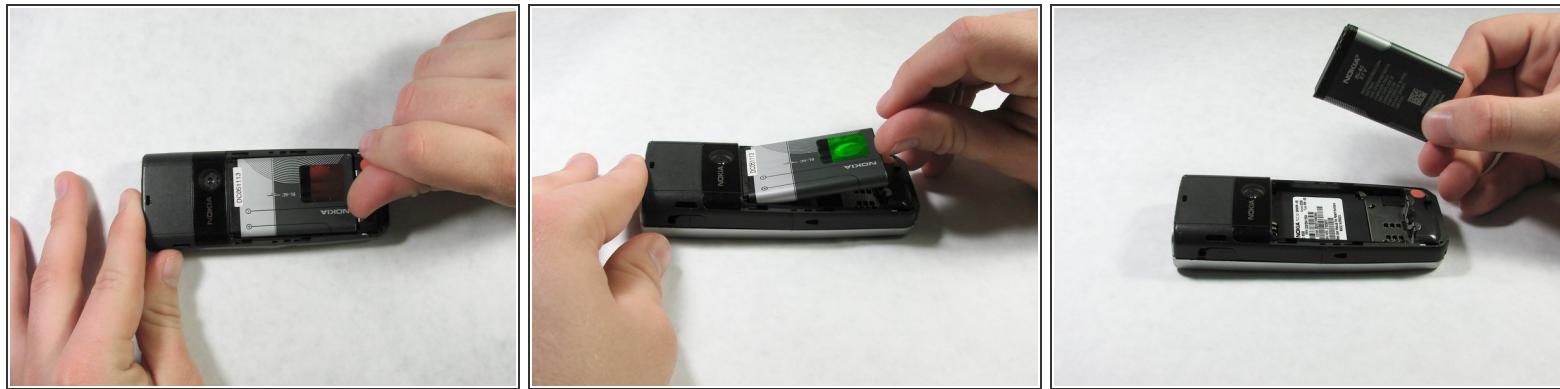


- Gently pull the battery out of the phone, using your thumb to apply pressure to the battery at the bottom of the phone.
- The battery should lift out with minimal resistance.

Step 3 — Front Casing



- Locate the notch on the bottom right corner of the phone.
- Beginning at this point, slide the head of the screwdriver between the front casing and the rest of the phone.
- Continue to slide the screwdriver towards the top edge of the phone.
- The front casing should eventually pop off.

Step 4 — Keypad

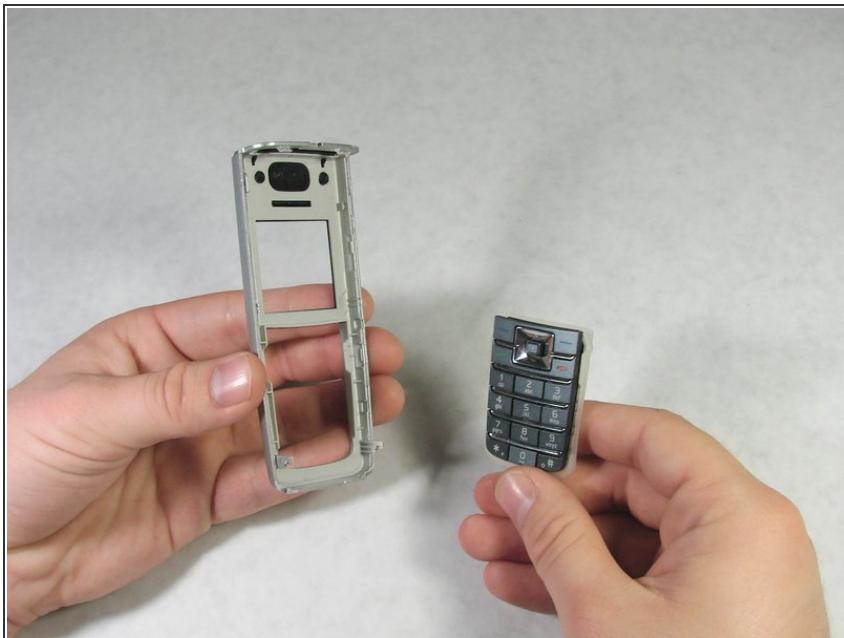

- With the front casing removed, the keypad can easily be pulled off the back of the front casing.
- In all probability, it will already have fallen out and no removal is required.

To reassemble your device, follow these instructions in reverse order.