



Disassembling Panasonic Lumix DMC-TZ5 Back Cover

This is the start to every repair guide, removing the back casing which also contains the LCD Display and back buttons.

Written By: Ben Canfield



INTRODUCTION

Since this is step one, you will just need to start with your camera.

TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [Spudger](#) (1)

Step 1 — Back Cover



- Remove the battery and memory card from the device.

Step 2



- Remove 4 screws from the right side of the camera.
 - There are two 3.4mm screws at the top.
 - There are two 2.2mm screws at the bottom.

Step 3




- Remove the single 3.4mm screw on the left side of the camera.

Step 4



- Remove 5 screws from the base of the camera.
 - There are two 2.2mm screws next to the battery compartment.
 - There are three 4mm screws around the tripod mount.


Step 5

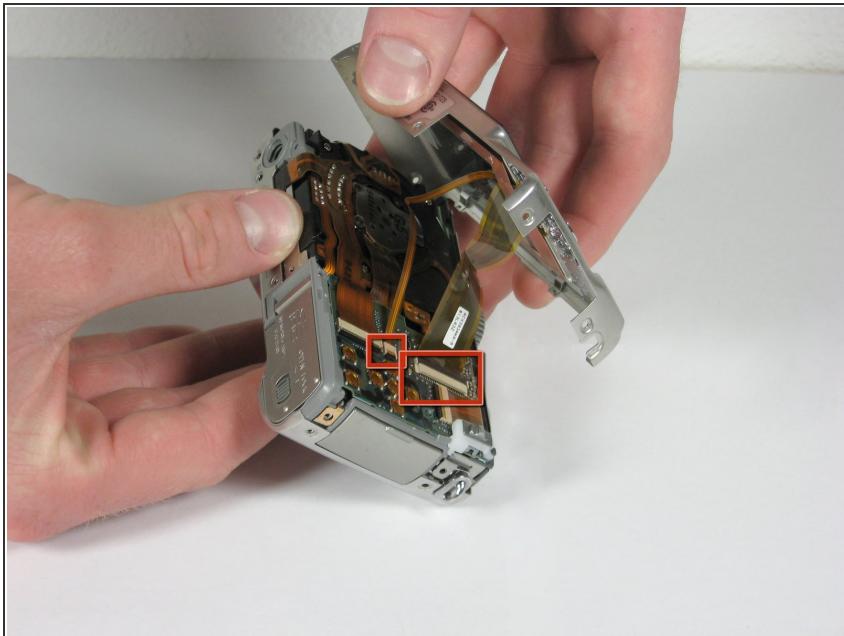

- Slowly slide the back cover away from the device


⚠ The back casing is held in place by two ribbon cables. Do not pull the back cover too far from the camera.

Step 6

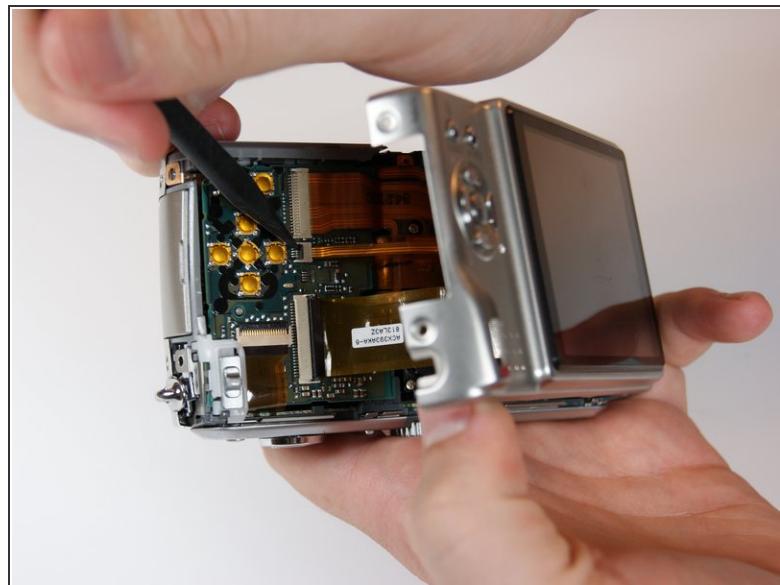

- Detach both ribbon cables using a spudger.
- Use the tip of the spudger to lift the black clip upward, unlocking the ribbon cable.

Step 7

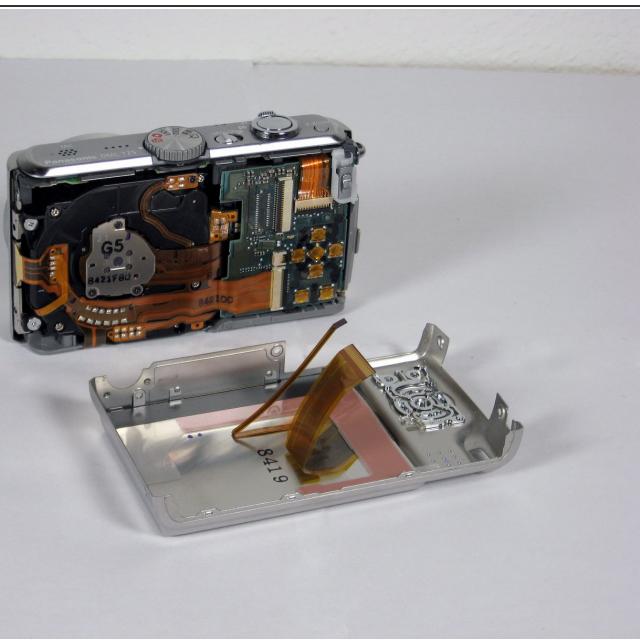

- Remove the back casing from the camera.

To reassemble your device, follow these instructions in reverse order.