



Disassembling Quasar Microwave Outer Cover

This is a guide on how to take off the outer cover of the Quasar microwave to get to the parts inside for repair or replacement.

Written By: Samuel



 **TOOLS:**

- Phillips #1 Screwdriver (1)

Step 1 — Disassembling Quasar Microwave Outer Cover




 Disconnect the power supply cord from the outlet.

Step 2



- Remove the eight screws holding the wood-patterned cover to the microwave frame.
- The first four screws are located on either side of the microwave front.

Step 3

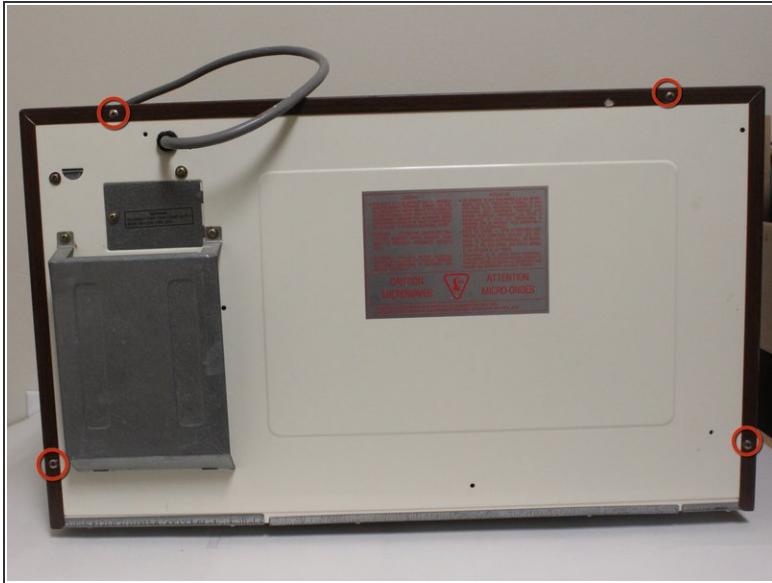

- Remove the additional four screws securing the wood-paneled case to the microwave frame.

Step 4



- Placing your hands on either side of the case, slide the case back gently until you feel it completely separate from the microwave frame.
- Lift the case upward slowly until the case is free of the microwave.

To reassemble your device, follow these instructions in reverse order.