



Disassembly of the bottom of the pot

You get insights into the technology of the device.

Written By: Leonard Kesting



 **TOOLS:**

- Phillips #1 Screwdriver (1)
- New Item (1)


Step 1 — Removal of the soil



⚠ Pay attention to voltage free!

- Loosen the three screws in the bottom with a 6mm spanner bit (are identical).
- The ground is now falling out.

Step 2

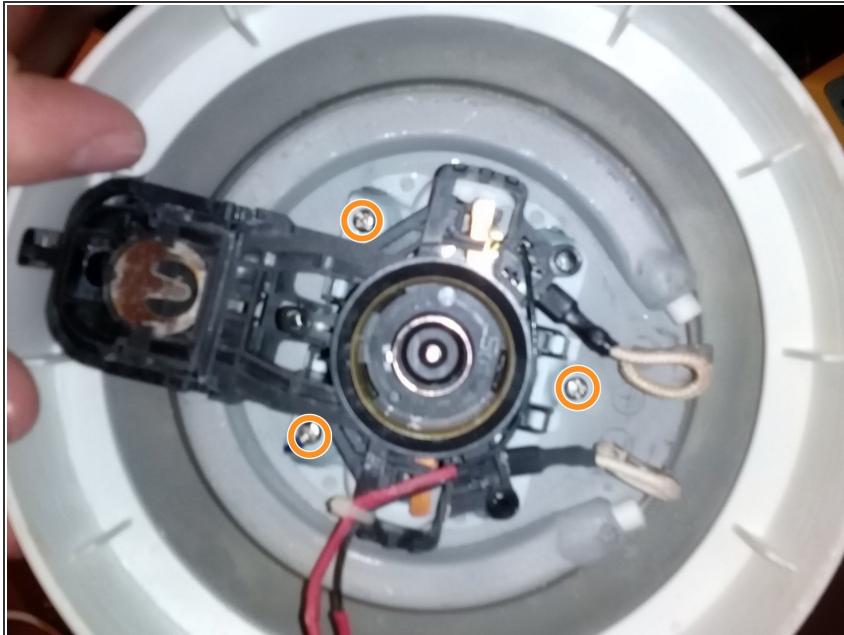

- The electronics are now accessible.
- If this is to be disassembled, remove the three marked screws with a PH1 screwdriver.

Repeat the steps in order to reassemble your device.