



Dopo Double Power 7 Motherboard Replacement

This guide will show you how to successfully remove the tablet's motherboard.

Written By: mike pelosi



 **TOOLS:**

- [iFixit Opening Tools \(1\)](#)
- [Flush Wire Cutters \(1\)](#)
- [Tweezers \(1\)](#)
- [Phillips #0 Screwdriver \(1\)](#)

Step 1 — Rear Panel



- The rear panel is secured to the front case and can simply be pried apart without damage.

Step 2



- Carefully, wedge the plastic opening tool in-between the seam that separates both halves of the tablet.

Step 3



- Run the plastic opening tool along the seam looking for the clips and lift up on the rear panel.

Step 4





- The rear panel should come completely off.

Step 5 — Motherboard



- Remove any static tape covering the motherboard.


Step 6

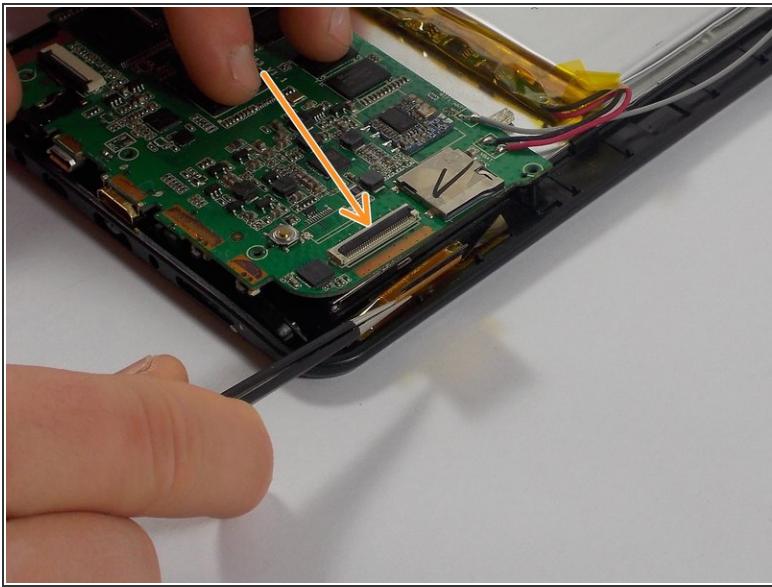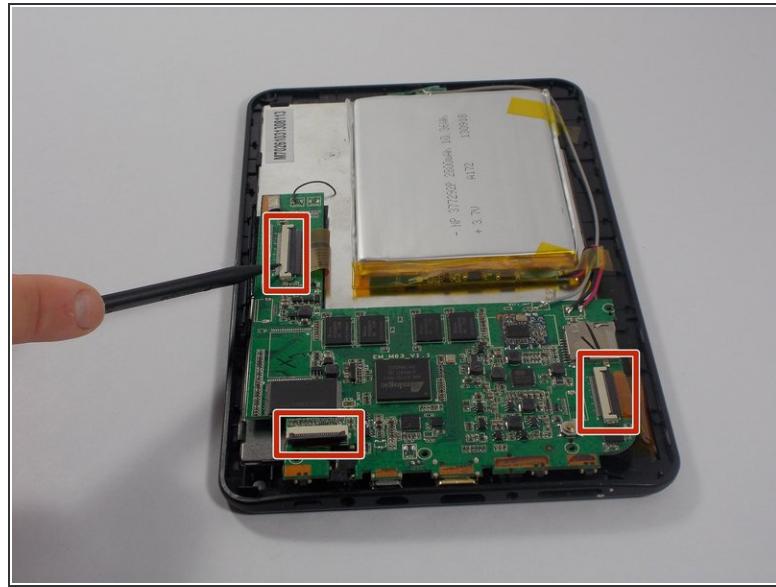

- Using the flat end of a spudger or tweezers, remove the three cables connected to the motherboard.
- The cables can be disconnected by lifting up on the black section of the socket, as shown by the arrow.



⚠ Once the lever is lifted, pull out the cable by gently tugging on it.

Step 7

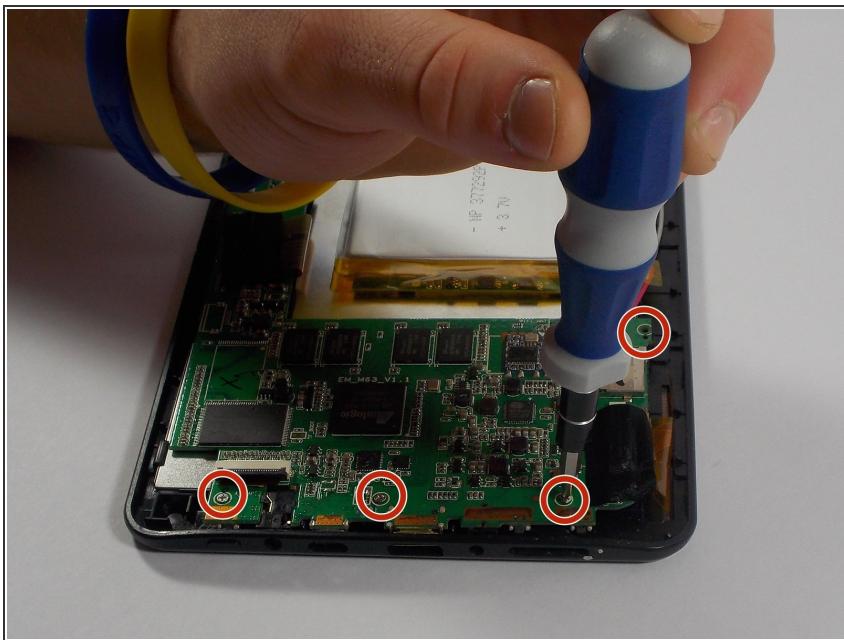

- Using a Phillips Head Screwdriver size 0, remove the four screws attaching the motherboard.

Step 8

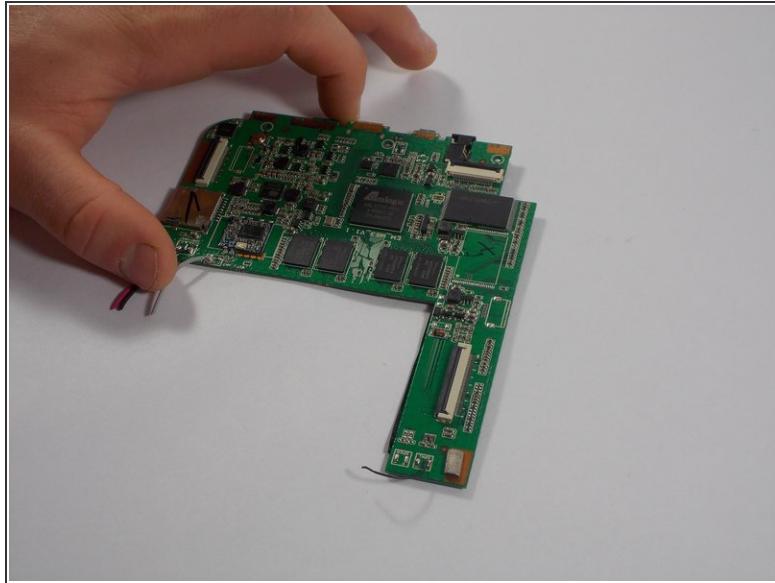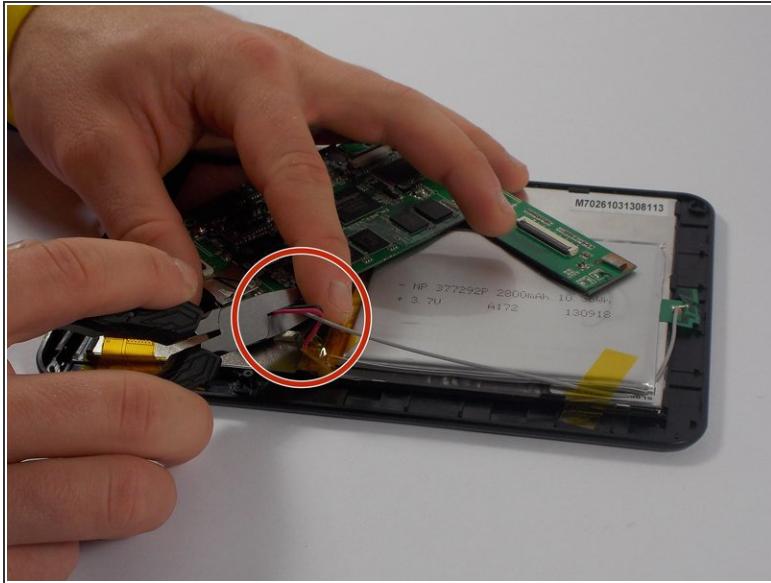

⚠ Using wire cutters, cut the red, black, and grays wires. Leave enough wire to be re-soldered back if possible.

- The motherboard can now be removed

To reassemble your device, follow these instructions in reverse order.