



Ematic Model FTABMP2 Screen Replacement

This guide will show you how to replace the screen of the Ematic Model FTABMP2.

Written By: Timothy



 **TOOLS:**


- iFixit Opening Tools (1)

Step 1 — Screen




- Use a spudger to pry open the case of your device to reveal the inside.

Step 2

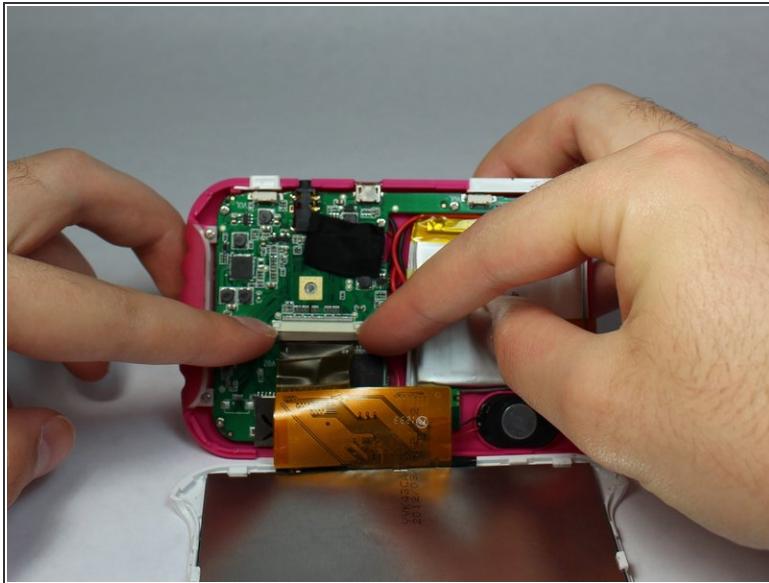

- Disconnect the LCD cable from the motherboard by pressing together the two sides of the clamp to separate the device into two.

Step 3

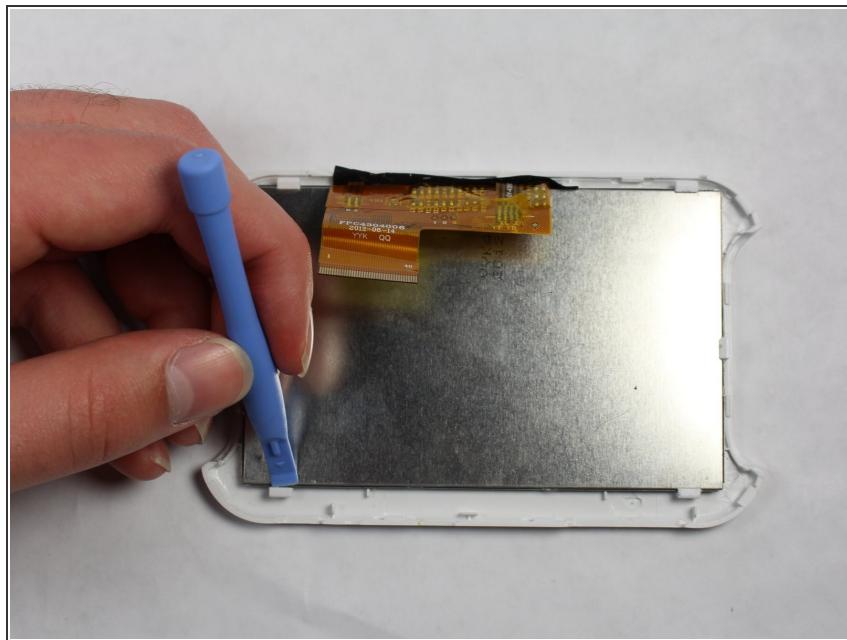

- Use the spudger to pry the LCD from the clamps holding it to the case.

To reassemble your device, follow these instructions in reverse order.