



# Escort Passport 9500IX Display Replacement

How to replace a Escort Passport 9500IX display.

Written By: Jiahao Xu



## INTRODUCTION

Is your radar's display not powering on or just hangs on a black screen? If this is the case, then the display could be at fault. Follow this guide to replace the display on your radar.

### TOOLS:

- [Phillips #1 Screwdriver](#) (1)
- [Spudger](#) (1)

## Step 1 — Back Panel




- Remove the three 1.2 mm Phillips #1 screws on the back of the device.

## Step 2




- Pry off the back panel of the radar using the nylon spudger.

## Step 3 — Display

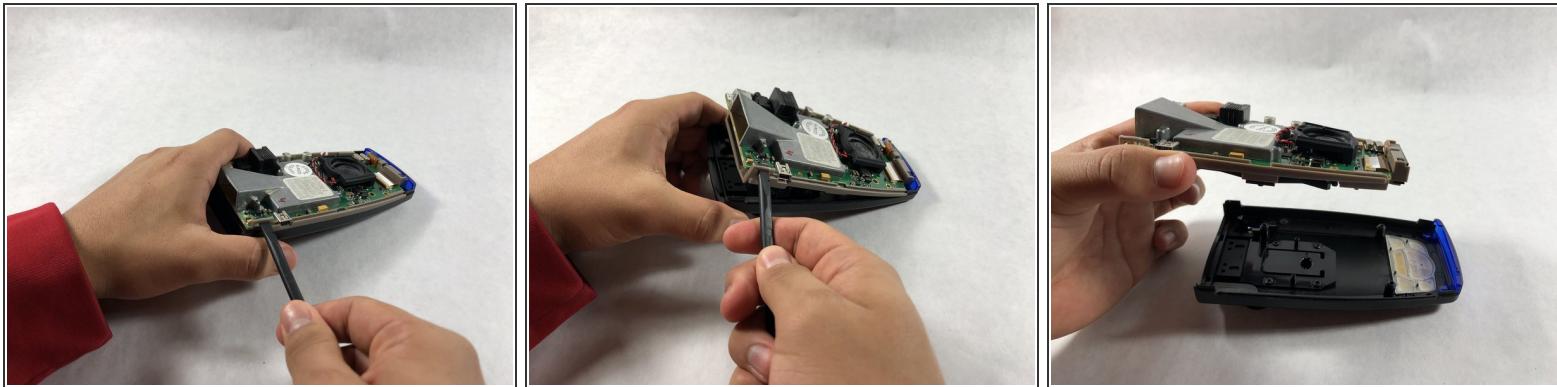


- Carefully pry the grey frame off the black plastic covering using the nylon spudger.

## Step 4

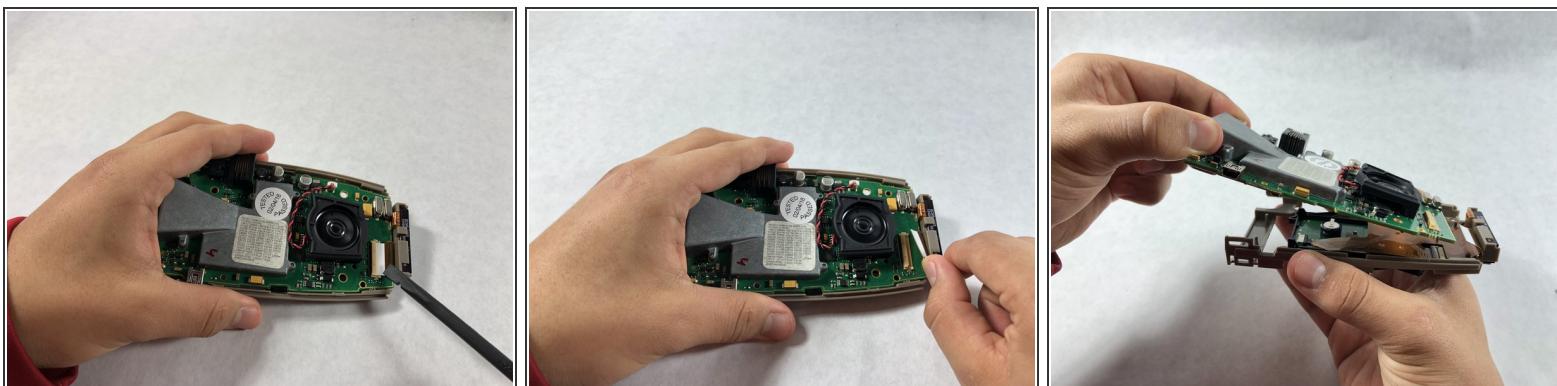


- Detach the orange flap from the motherboard using a nylon spudger.
- Carefully remove the motherboard from the grey plastic frame.

## Step 5

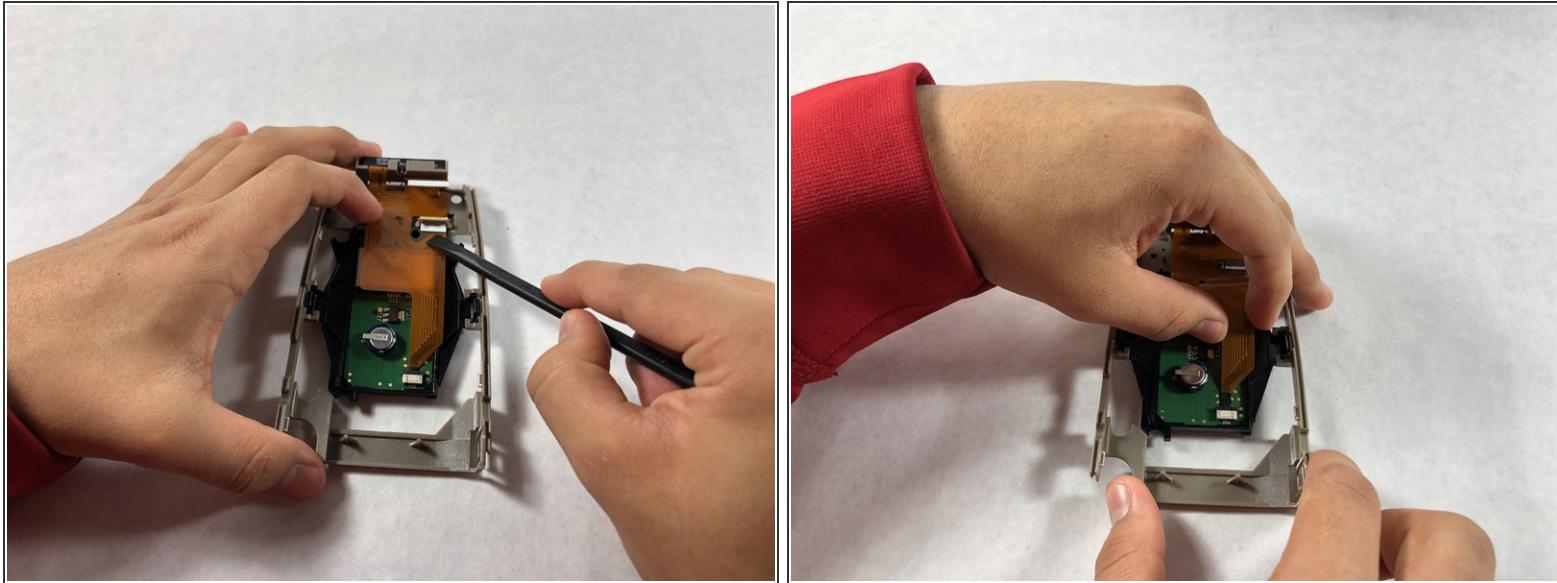

- Detach the remaining two orange flaps from the circuit board that is attached onto the grey frame.

## Step 6

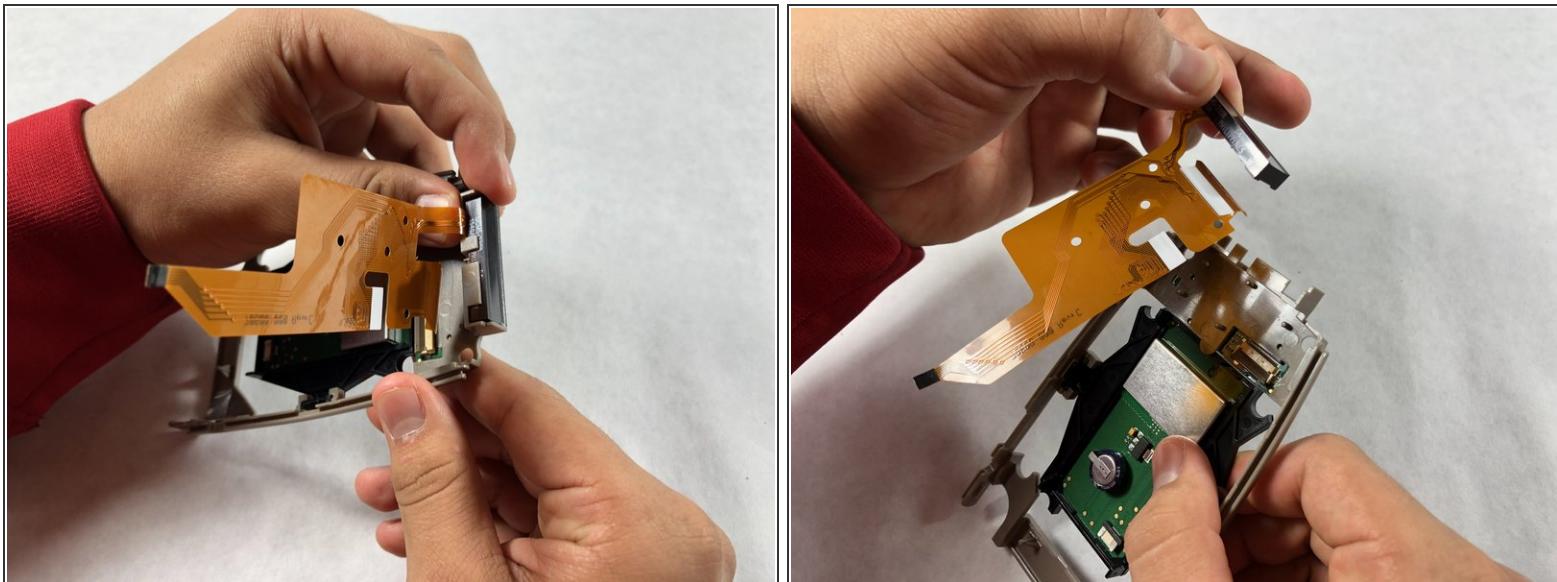

- Detach the display from the grey frame.

To reassemble your device, follow these instructions in reverse order.