



Etekcity Lasergrip 1080 Button Replacement

There is a bad connection between the buttons and the device. This will show how to repair the faulty connection.

Written By: Patrick Crawford



INTRODUCTION

This guide will teach you how to replace buttons that are not functioning properly. This will use a screwdriver and a plastic opening tool. There are no hazards involved.

TOOLS:

- [iFixit Opening Tools \(1\)](#)
- [Phillips #0 Screwdriver \(1\)](#)

Step 1 — Battery



- Pull the battery cover away from the handle by gripping near the thumb groove.

Step 2



- Gently pull the battery out of the handle.

⚠ Excessive force could damage wires.

Step 3



- Disconnect the battery by pulling the connector away from it.
 - Positive first
 - Negative second

 When replacing the battery, this order is reversed.

Step 4 — Buttons



- Remove the battery cover from the device by pulling it straight out.

Step 5



- Using the plastic opening tool remove the front and rear yellow covers.


⚠ When removing the back cover, be careful not to lose the buttons as they are not connected.

Step 6



- Remove the two 3.1 mm Phillips #0 screws.


Step 7

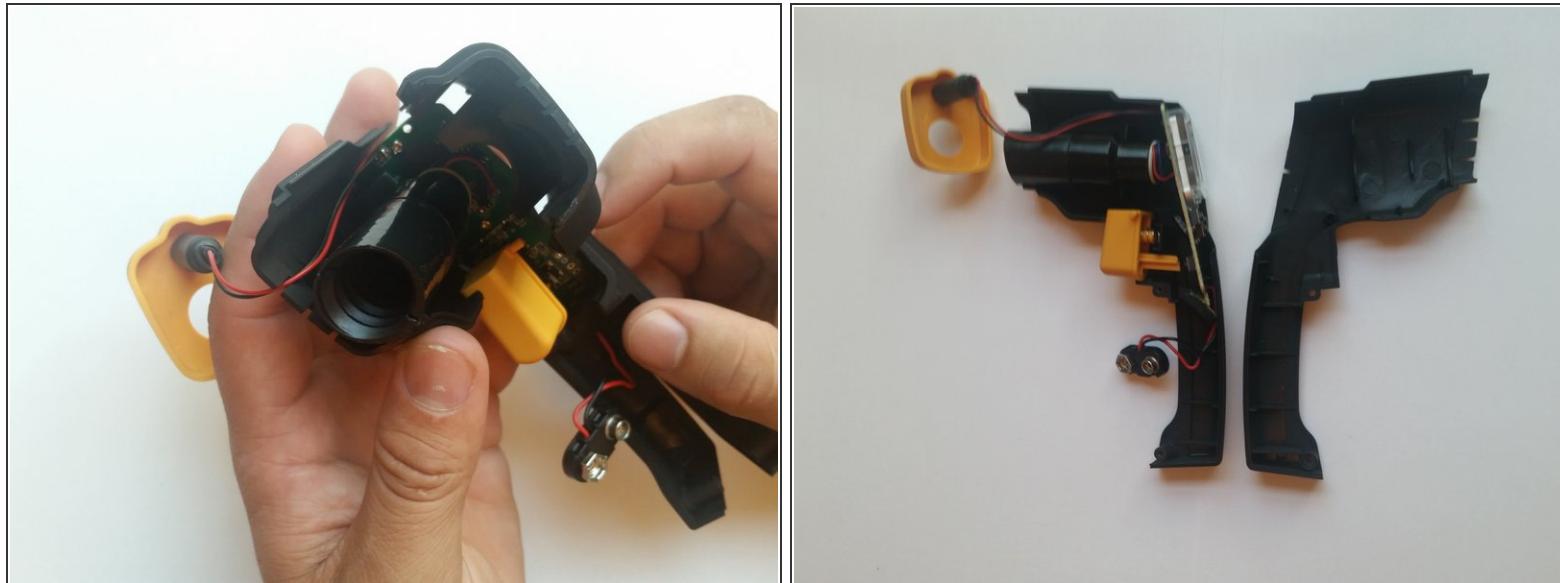

- Pull the two halves apart.

⚠ Be careful not to lose any components on the inside.

Step 8

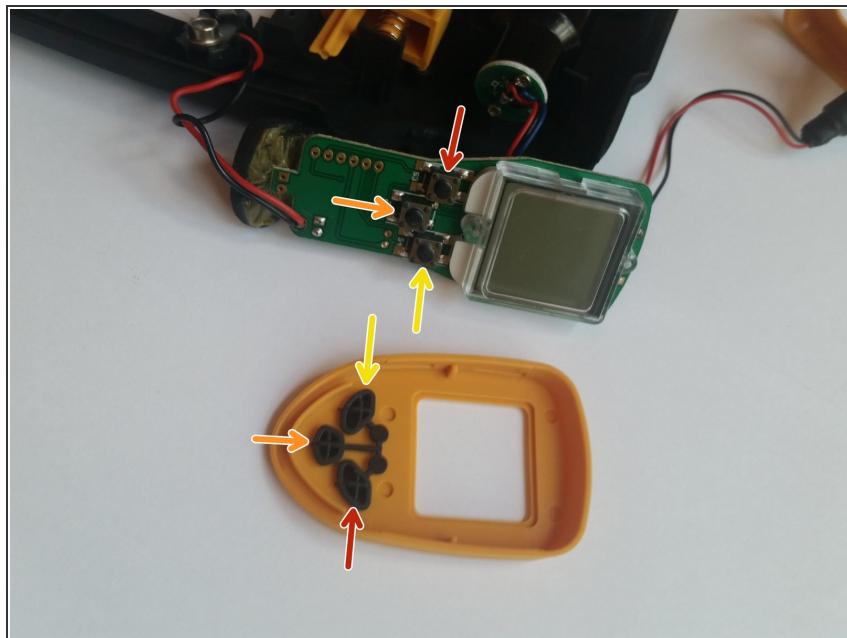

- Realign the buttons with the button terminals.
- Red terminal to red button.
- Orange terminal to orange button.
- Yellow terminal to yellow button.

To reassemble your device, follow these instructions in reverse order.