




External Cover Replacement

Taking the external cover off the tablet.

Written By: Jason Wignot

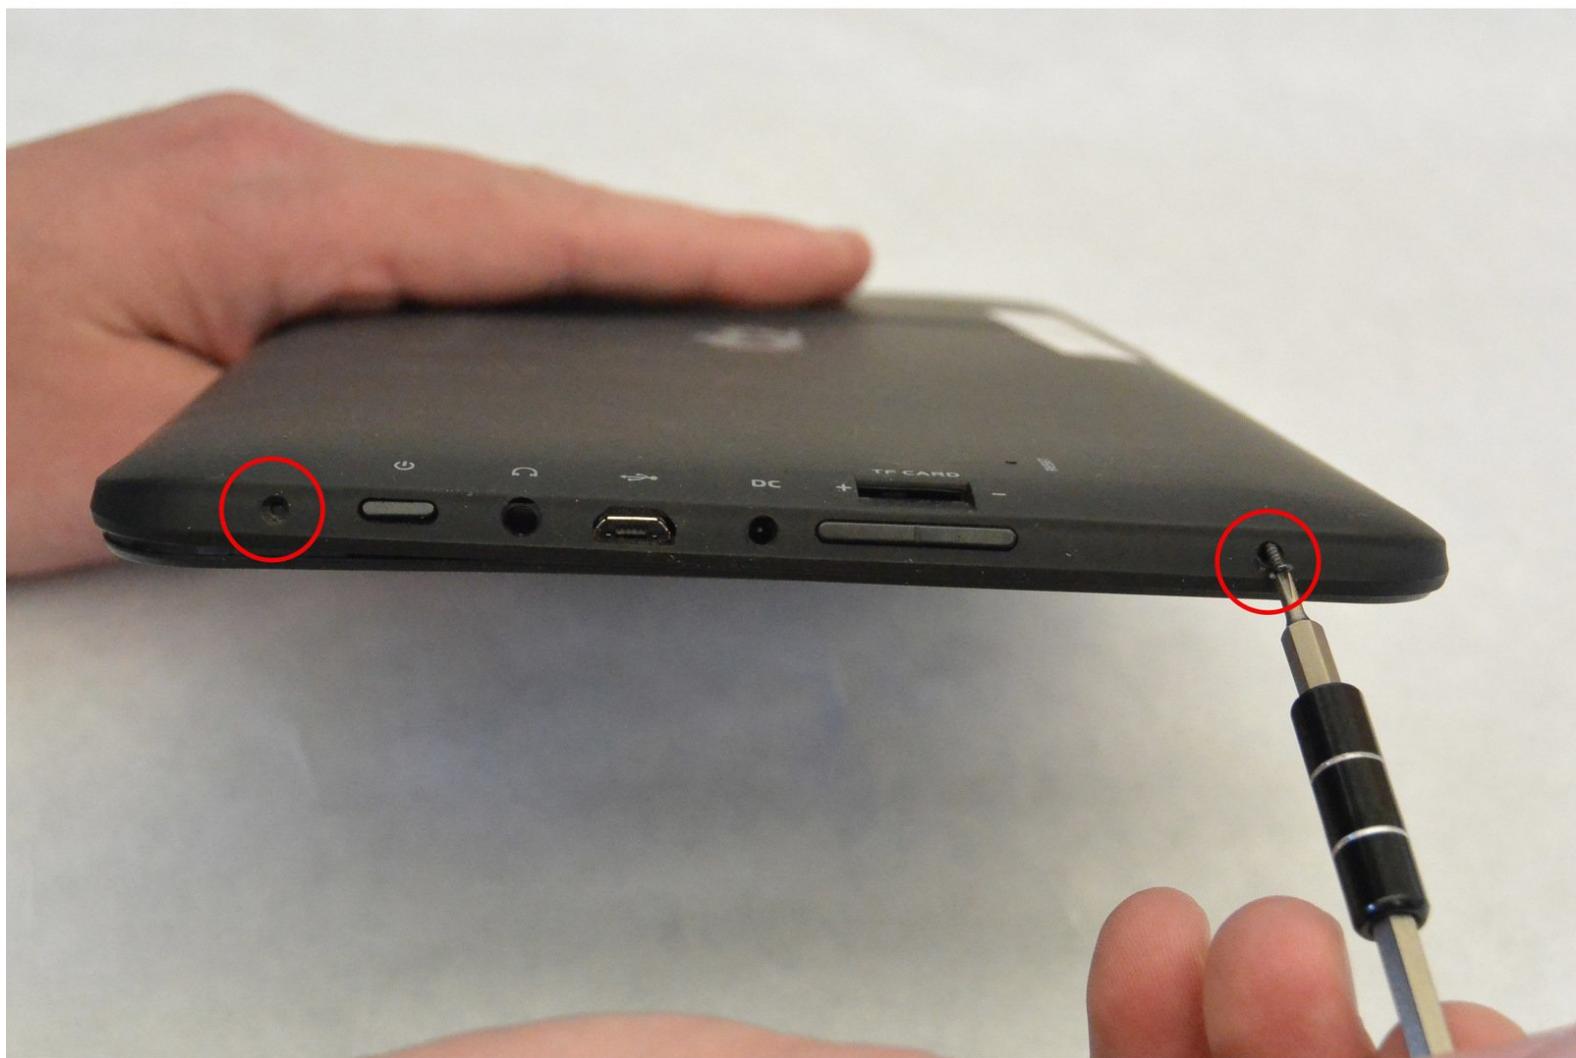


INTRODUCTION

We will be removing taking some screws out and removing the external cover in order to replace internal components of the tablet.

TOOLS:


- [Phillips #00 Screwdriver](#) (1)

Step 1 — External Cover

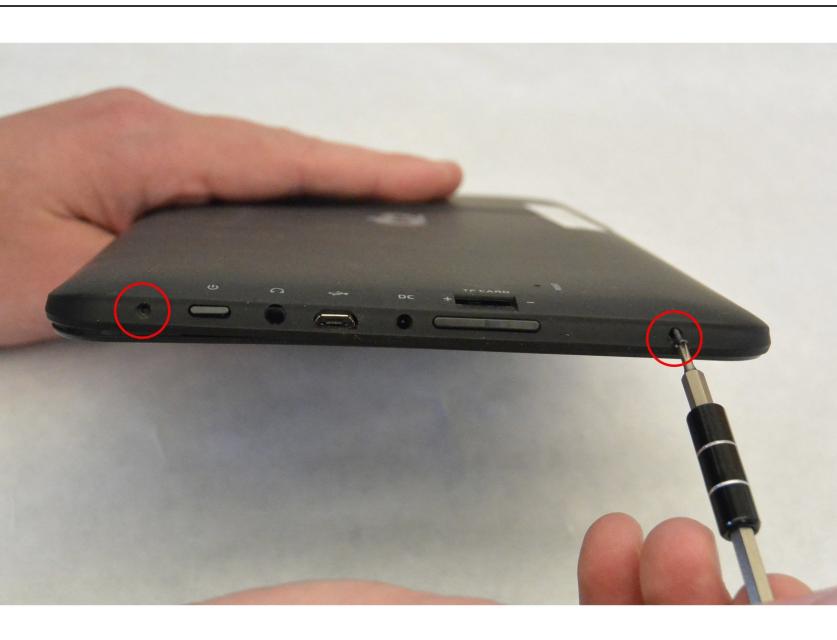

- Remove the two Phillips #00 screws from the bottom of the case.

Step 2

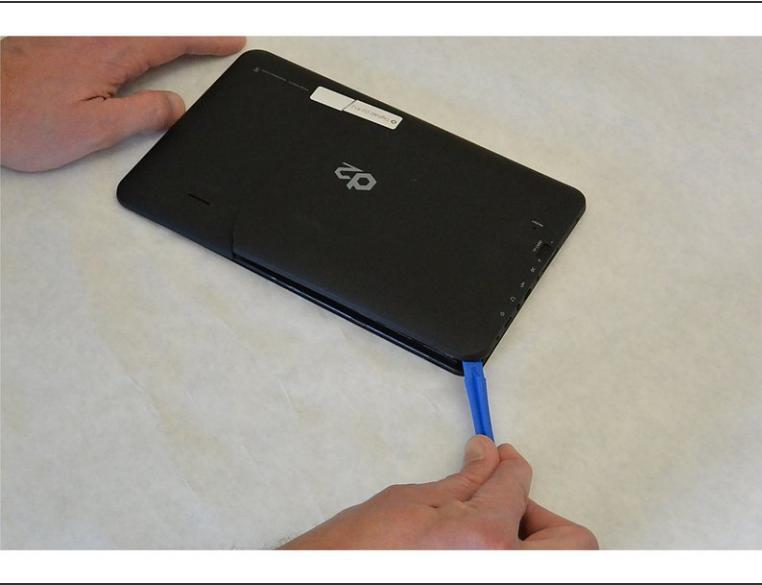

- Wedge the opening tool in the space between the back and the front of the tablet.
- Carefully work your way around the perimeter, wedging the opening tool between the front and back of the tablet.
- When the back of the tablet is mostly detached from the front, carefully pull it away completely.

This document was generated on 2019-10-01 03:38:41 PM (MST).

