



First Act MA2039 Battery Replacement

Removing drained 9-volt battery from cartridge and replacing with a new battery.

Written By: Luke VanBuskirk




INTRODUCTION

If the amplifier is not turning on when you press the power switch, you may want to replace the batteries. Each 9-volt battery provides power to the amplifier. It is crucial to have good batteries to enhance functionality of your amplifier.

TOOLS:

- **Spudger** (1)

Step 1 — Battery

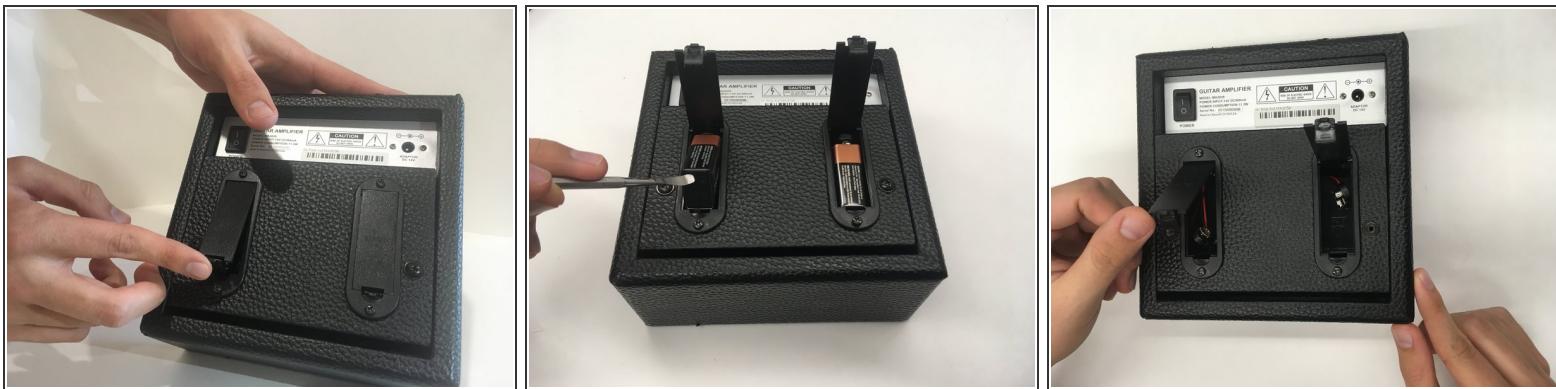

- Press the bottom tab and lift the lid that is marked "9V Battery"
- Open the lids of both battery cartridges, use a Spudger to lift the 9-volt battery out.
- Disconnect the attached 9-volt battery from the positive and negative terminal connections to prepare for replacement.

Step 2



- Insert a new, fully-charged 9-volt battery to the terminal connections.
- Link the positive terminal (+) of the 9-volt battery to the positive connection.
- Link the negative terminal (-) of the 9-volt battery to the negative connection.
- Repeat the process for the 2nd 9-volt battery in the neighboring cartridge.

Step 3



- Insert the 9-volt battery into the cartridge.
- Press firmly to slide the battery into the cartridge, and close the tab to ensure the battery is secured.
- Close the tab after the battery is secured, until the tab "clicks" into place.

Step 4



- Make sure connections are secure and insert 9-volt batteries into the battery cartridges.
- Close the tabs until you hear a click.
- Now, try turning on the power switch. Get ready to rock & roll!

To reassemble your device, follow these instructions in reverse order.