



# Fosera Scandle 200 Motherboard Removal

This guide shows how to open the casing of the Fosera Scandle 200 in order to gain access to key components.

Written By: Vladislav Ignatov



## INTRODUCTION

This guide will serve as a prerequisite to the replacement guides for the various electrical components in the Fosera Scandle 200. The removal of the motherboard is necessary before any other components can be accessed. The steps involved are very simple, and very little expertise is required.

## TOOLS:

- [Phillips #0 Screwdriver \(1\)](#)
- [Spudger \(1\)](#)

## Step 1 — Motherboard Removal




- To open up the casing, you will need to unscrew the four Phillips #0 15mm screws which are accessible from the back.

## Step 2




- Gently separate the two halves of the casing.

## Step 3

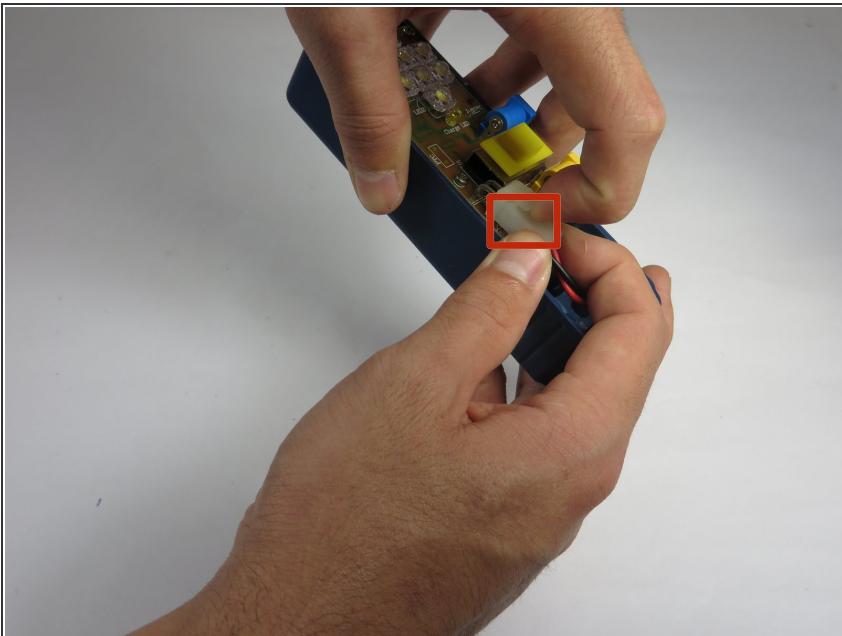


- Disconnect the battery from the motherboard by lifting up on the white plastic tab on the top of the connection.
- Gently pull the cord out by the white plastic adapter. Do not pull from the red and black cord.

## Step 4

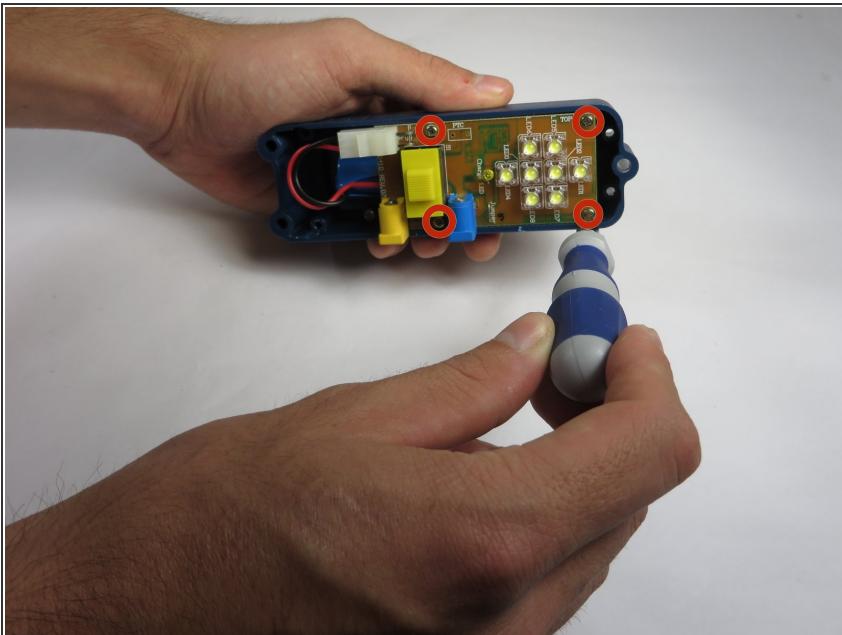

- Unscrew the Phillips four #0 15mm screws to free the motherboard from the casing.

## Step 5

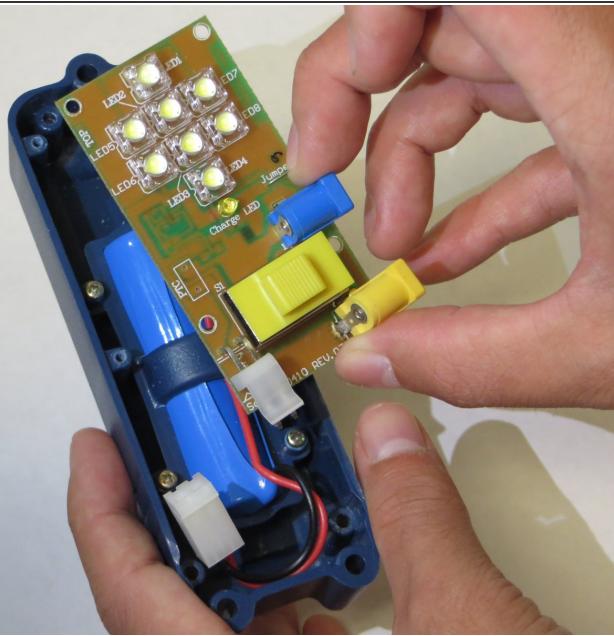

- Slowly pull the motherboard out of the casing. Make sure the loose battery wire doesn't get snagged.