



# Fujitsu Lifebook Stylistic Q584 AC Power Port Replacement

Remove the AC power port from the Fujitsu Lifebook Stylistic Q584.

Written By: Spencer Bacon




## INTRODUCTION

If the power port stops working you can use this guide to replace it. During this guide be careful as you are working on electronics as you remove the wires indicated in this guide to ensure no further damage to your device.

### TOOLS:

- [iFixit Opening Tools](#) (1)
- [Phillips #1 Screwdriver](#) (1)
- [Phillips #000 Screwdriver](#) (1)

## Step 1 — Back Case

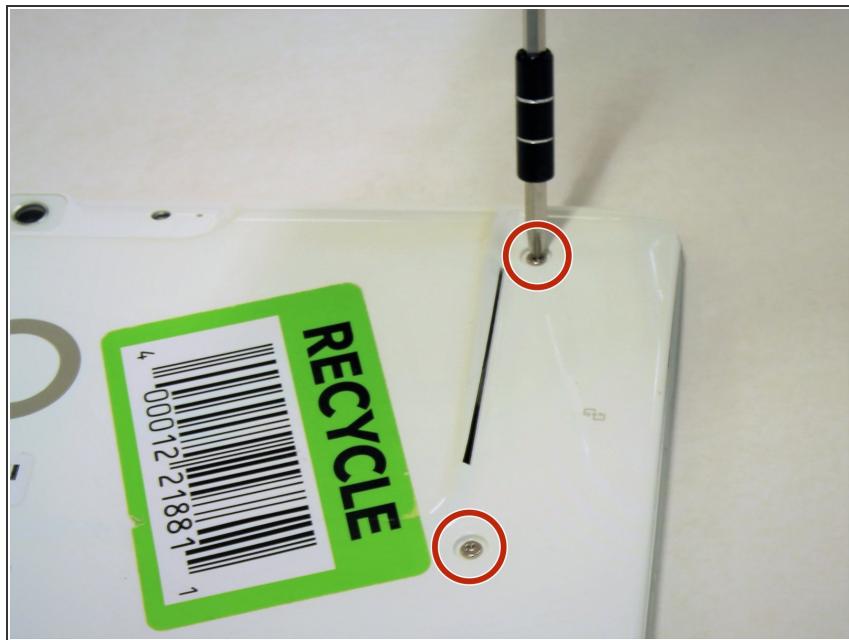


- Remove the white sticker covering the screws (*if applicable*).
- Use the PH1 screwdriver to remove the four 2 mm screws from the the backside of the device.

## Step 2




- Insert the plastic opening tool along the seam of the back case.
- Gently slide the plastic opening tool along the entire seam popping the clips free.

## Step 3

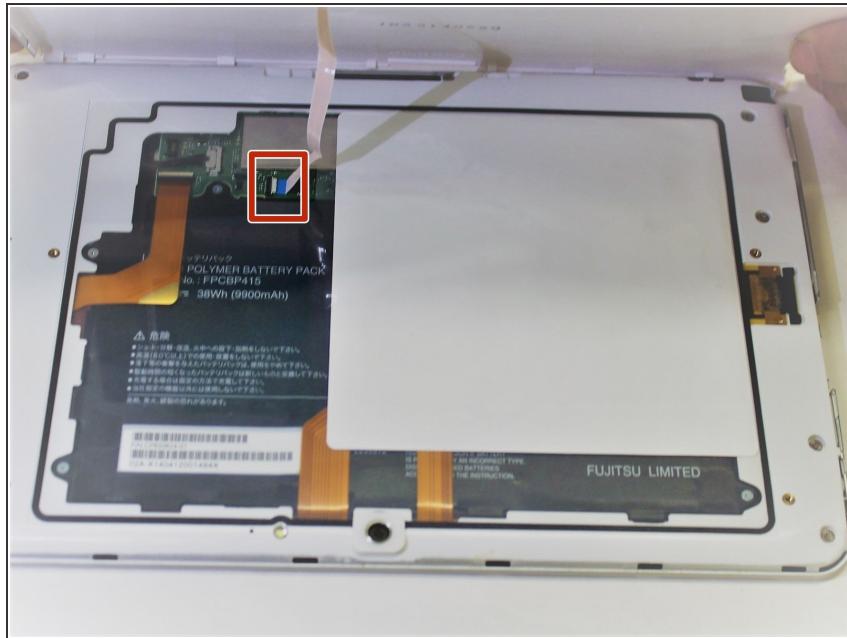


- Carefully lift the back case and remove the smartcard ribbon from the motherboard.

## Step 4 — Inner Back Shield

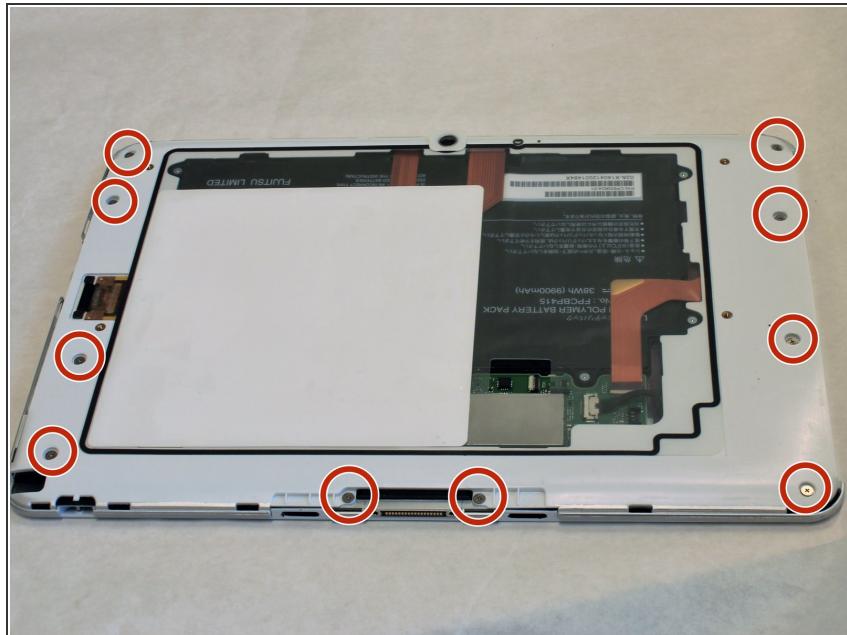


- Remove the ten 3mm screws with a PH00 screwdriver from the shield.

## Step 5

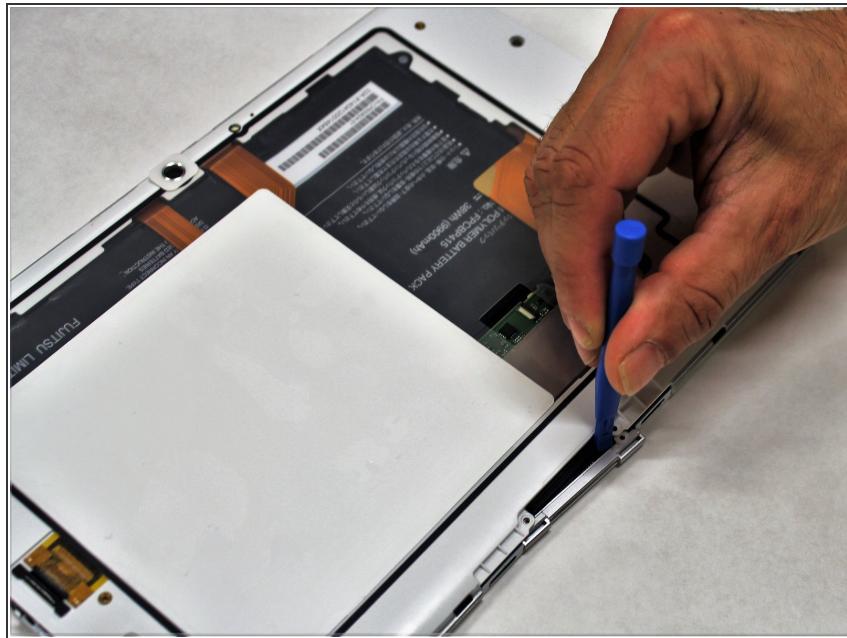

- Remove the grey docking station port cover.

## Step 6

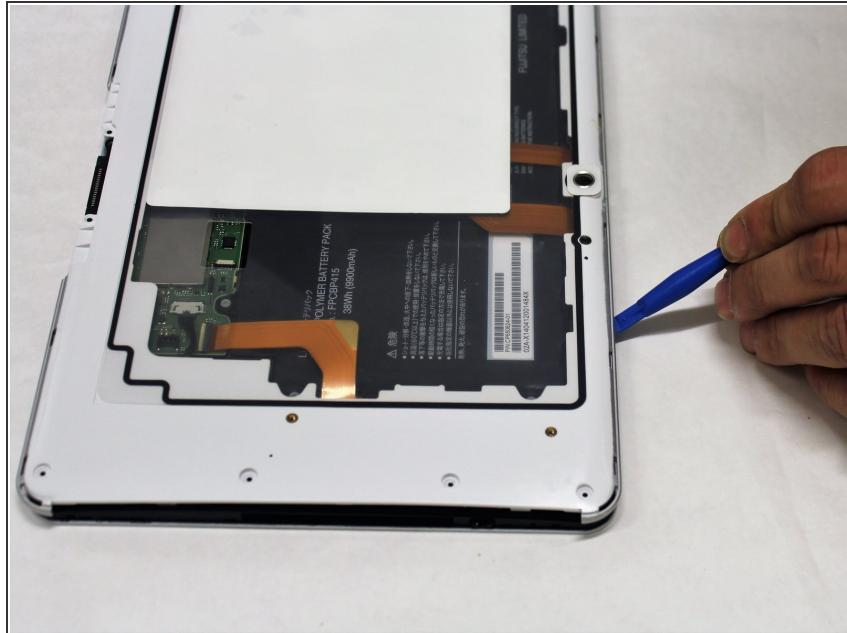

- Gently slide the plastic opening tool along the entire seam popping the clips free.

## Step 7




- Lift the shield away from the device and remove the fingerprint scanner's ribbon from the motherboard.

## Step 8 — AC Power Port



- Pry the AC power port board away from the device.

## Step 9

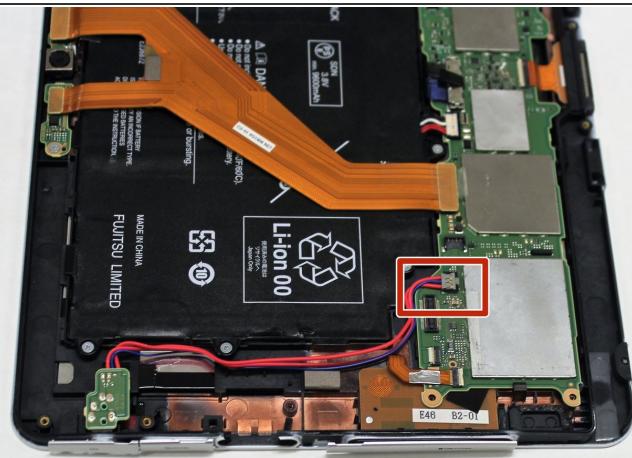

- Unplug the wires from the motherboard.

To reassemble your device, follow these instructions in reverse order.