




Garmin Approach S2 Water Proof Gasket Replacement

This is a guide to replace the Water Proof Gasket.

Written By: dengweiyuan931226

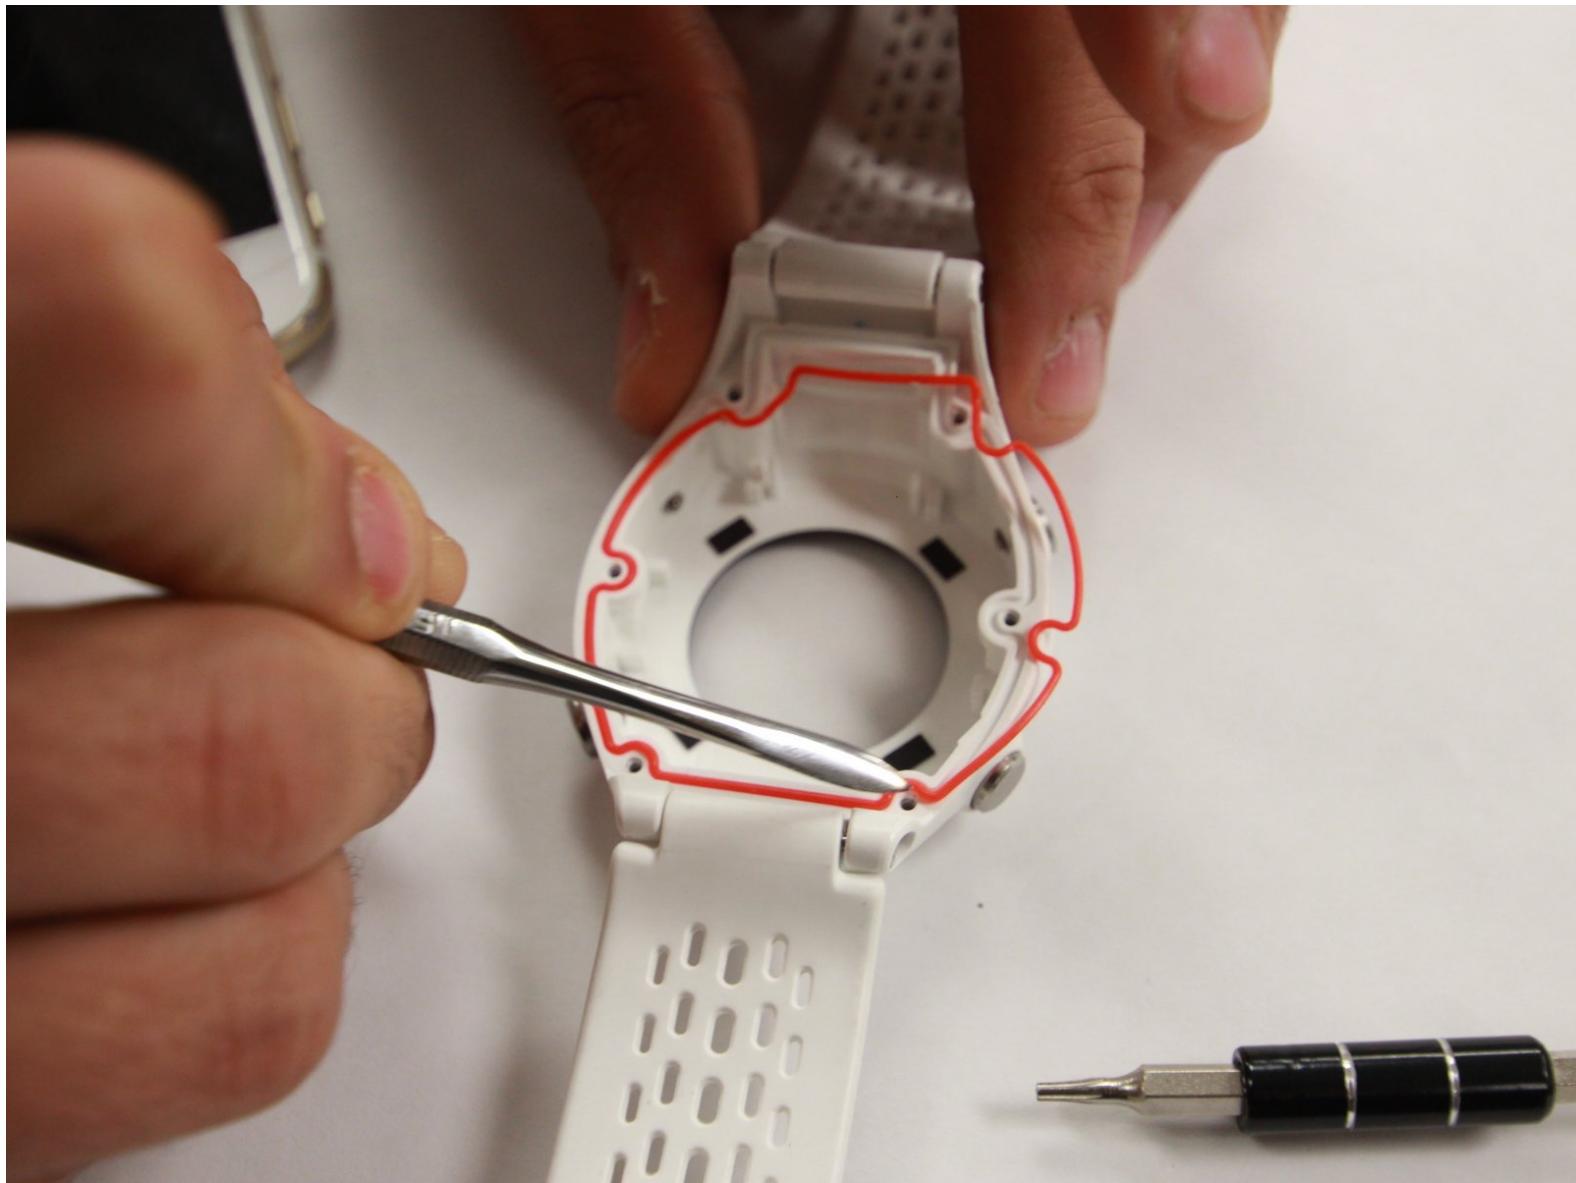


INTRODUCTION

This is a short guide, but take note that the gasket will want to sit a certain way upon the groove.

TOOLS:


- T5 Torx Screwdriver (1)

Step 1 — Back Cover

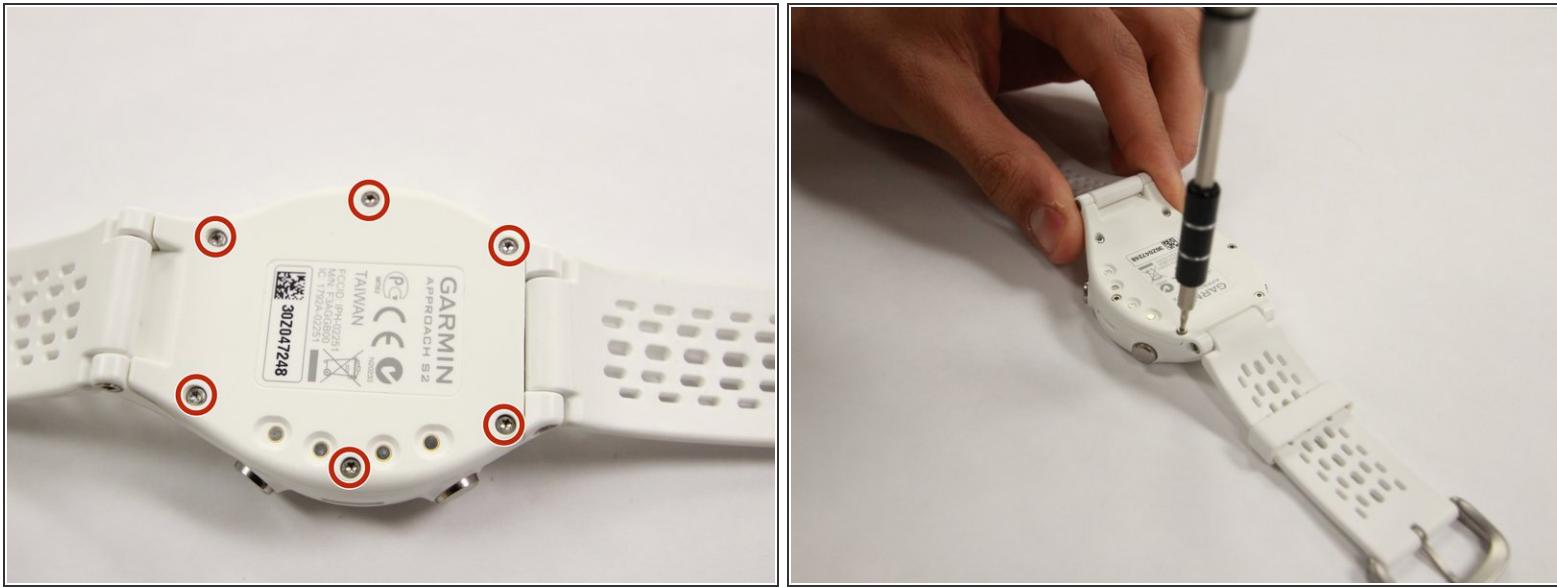

- Remove the six T5 Torx 6.32mm screws securing the back cover to the watch.


Step 2

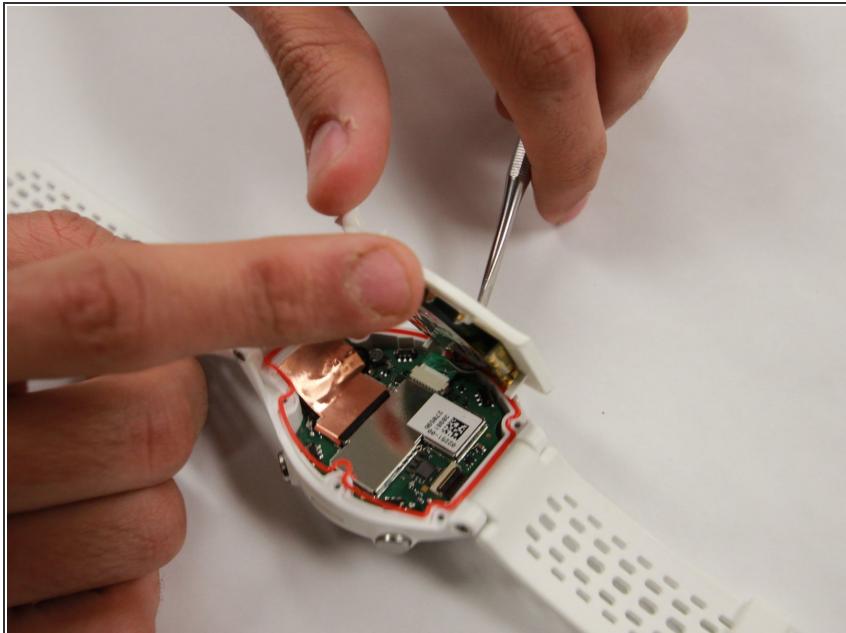

- Remove the back cover carefully.

i Even after the screws have been removed, the back cover can still be quite difficult to take off. Moderate to extensive prying may be required. Be gentle, but *firm*.

Step 3 — Water Proof Gasket

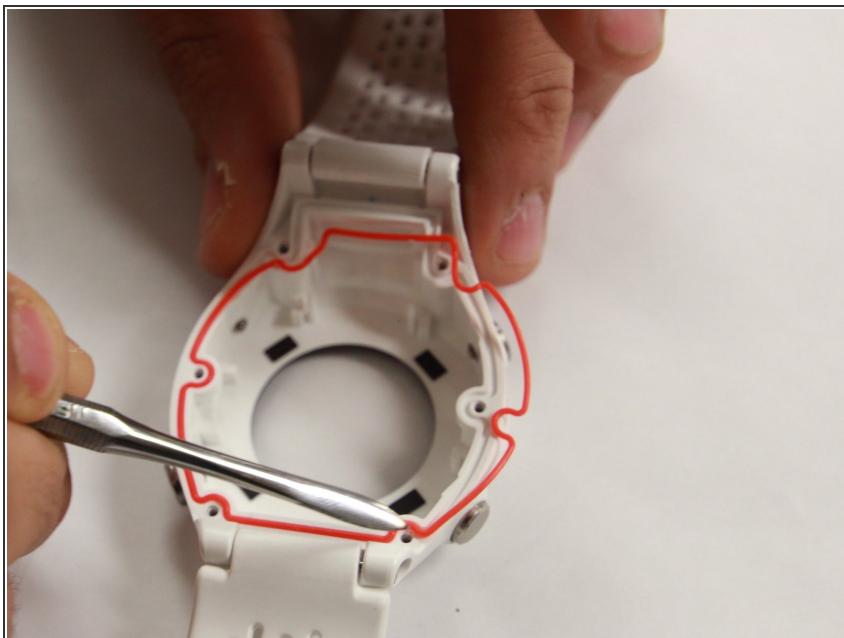

- Remove the orange gasket.

To reassemble your device, follow these instructions in reverse order.