



Garmin Fenix 2 Battery Replacement

This guide will show you how to replace the battery in the Garmin Fenix 2

Written By: Brandon Barger



INTRODUCTION

We will be replacing the battery in the Garmin Fenix 2 watch. You should have a Torx T9 screwdriver on hand and a nylon spudger.

TOOLS:


- [T9 Torx Screwdriver](#) (1)
- [Spudger](#) (1)

Step 1 — Battery




- Use a Torx T9 screwdriver to remove these four .8mm screws and separate the housing.

Step 2

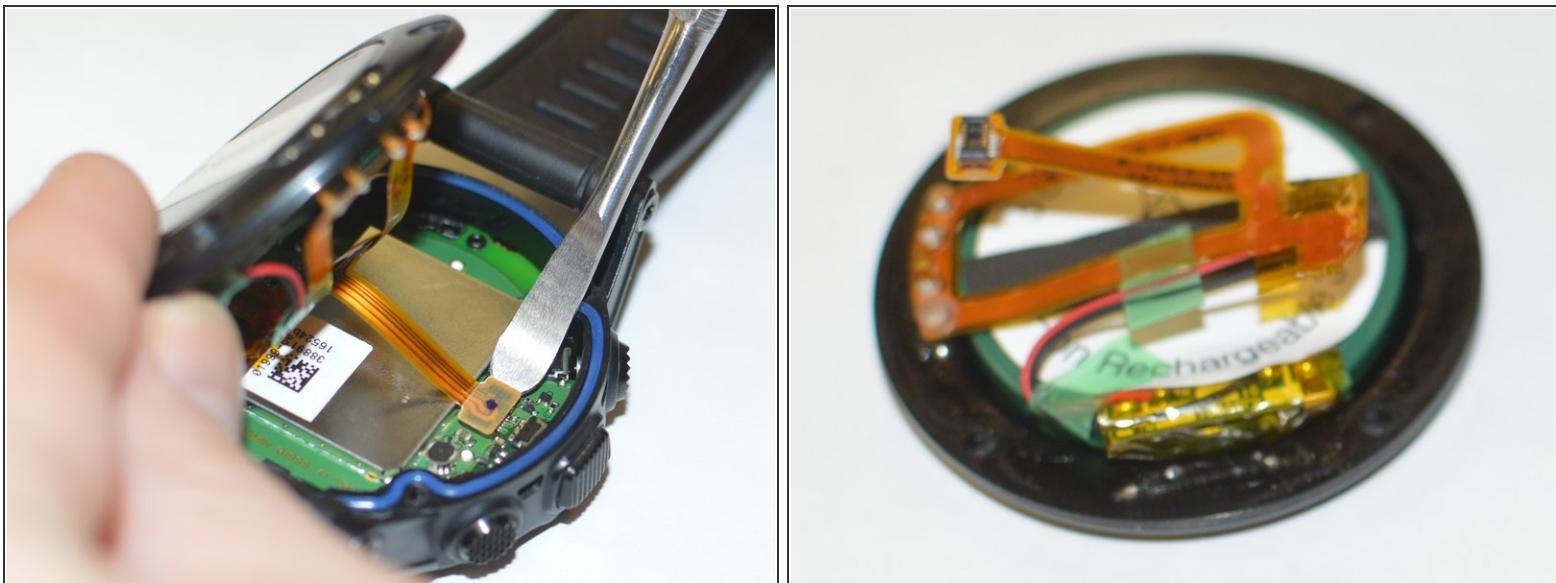

- Use a spudger tool to disengage the power ribbon from the main board. Once the ribbon is disconnected you can separate the bottom piece of the housing that holds the battery.

Step 3

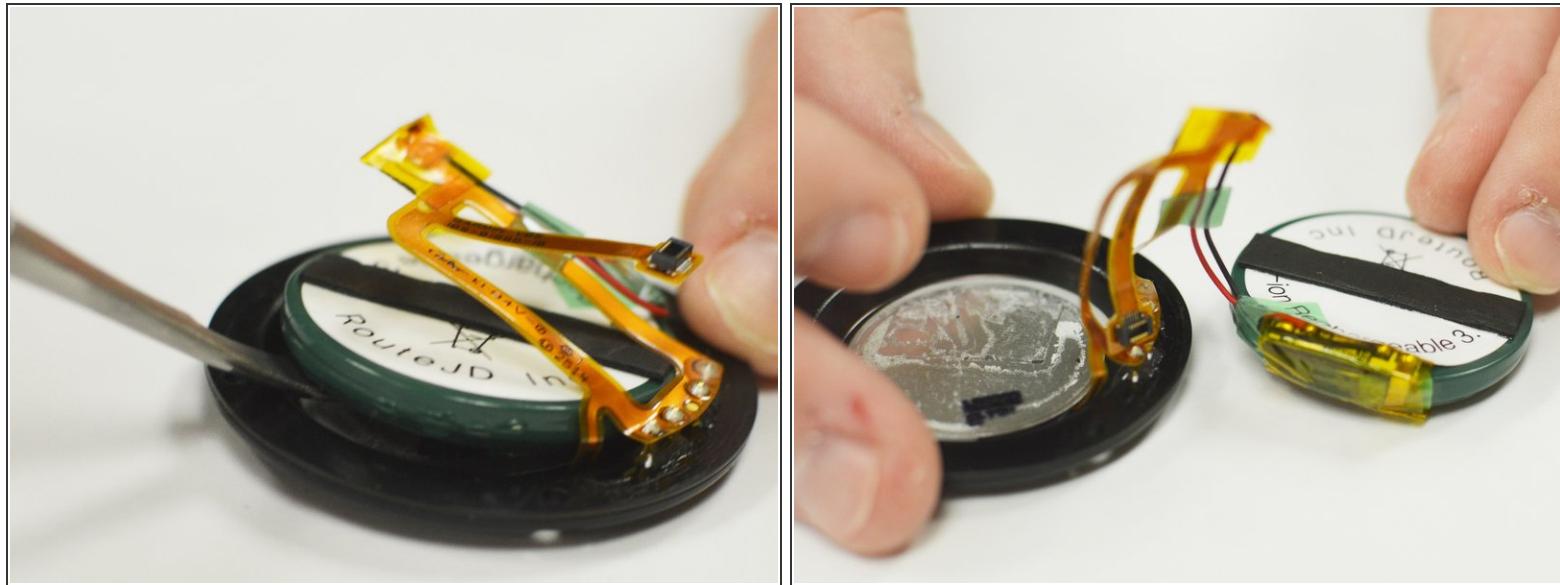

- Use the spudger tool again and wedge it in between the battery and the housing, pry until the battery starts to separate from the adhesive holding it in place. Once you have the battery disconnected you are ready to replace it.

⚠ Despite the fact that the metal spudger is shown being used in this step, make sure to use a plastic opening tool or nylon spudger to pry up the battery. The metal spudger has a much larger chance of puncturing the battery, and thus should not be used.

To reassemble your device, follow these instructions in reverse order.