



General Disassembly LG VX8560

General disassembly

Written By: Jack Foley



 **TOOLS:**

- [Phillips #00 Screwdriver \(1\)](#)
- [iFixit Opening Tools \(1\)](#)

Step 1 — General



- Flip phone over so its backside is facing up.

Step 2




- Push from indentation and slide battery cover away from phone to remove battery cover.

Step 3



- Hold battery upwards so you see "This side up"

Step 4

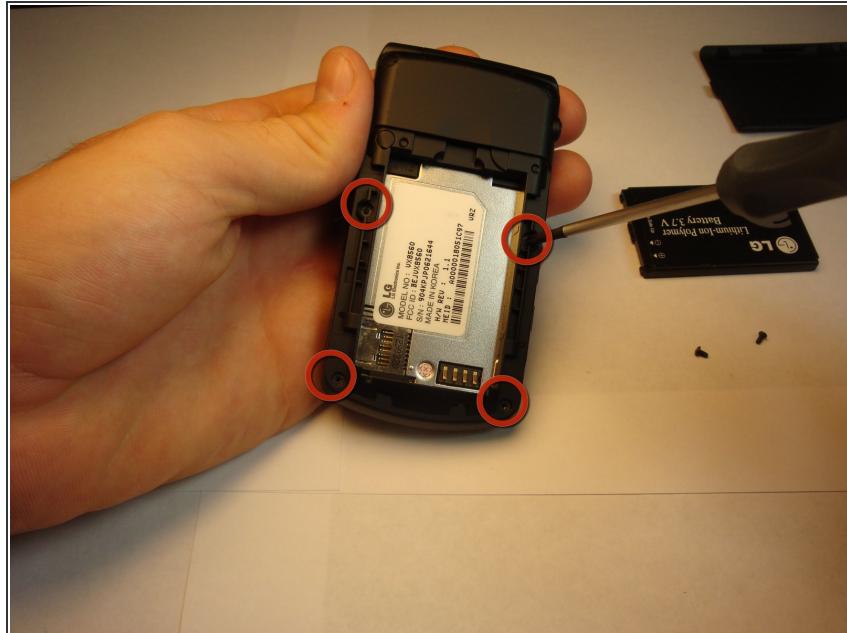

- Using a philips screwdriver, unscrew all 4 screws along the edge of the phone

Step 5



- Using your plastic pry tool, slide the tool between the phone's keypad cover and back cover.

Step 6



- You should be able to see the motherboard. Don't separate the two covers. They should be held together by a screw at the axis of the phone.

To reassemble your device, follow these instructions in reverse order.