



Gipo H369e Screen Replacement

Demonstrates how to replace the screen of your Gipo H369e.

Written By: Janelle Norris




 **TOOLS:**

- [Phillips #000 Screwdriver \(1\)](#)
- [iFixit Opening Tools \(1\)](#)
- [Small Needle Nose Pliers \(1\)](#)

 **PARTS:**

- [Gipo H369e screen \(1\)](#)

Step 1 — Screen

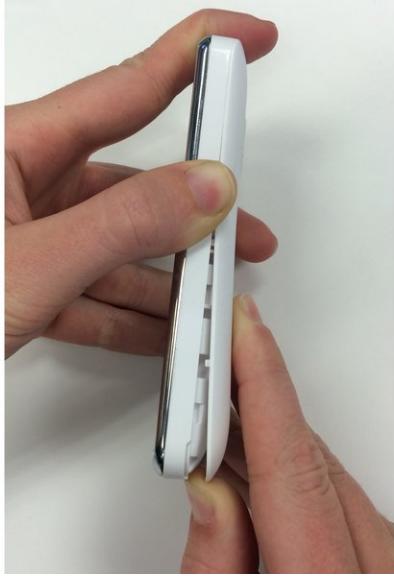

- Insert your thumb into the groove on the back lefthand corner of the phone to unsnap the back cover.

Step 2




- Remove the battery from the back of the phone.

Step 3



- Unscrew the 6 screws on the back of the phone using the Philips Head 000 screwdriver.
- You can use the back cover as a tray to hold the loose screws.

Step 4

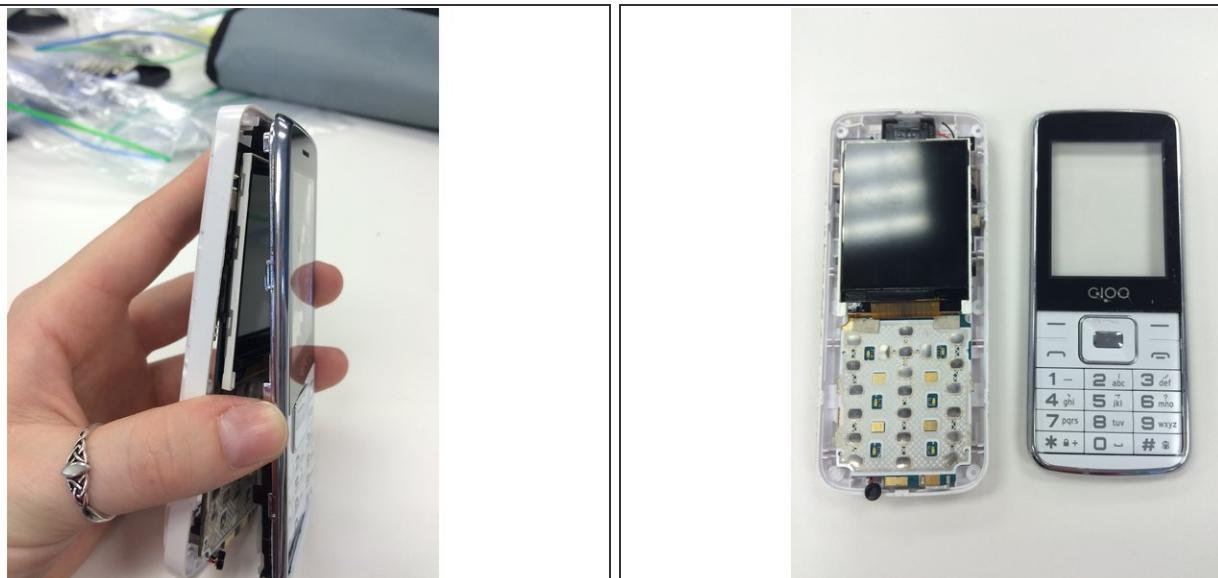

- Use the plastic opening tool to pry the front of the phone away from the back of the phone.

Step 5



- Once the front and back of the phone are separated, push the keypad out of the front portion of the phone.

Step 6



- Use the needle nose pliers to pull the screen away from the front of the disassembled phone. Replace it with your new screen.

To reassemble your device, follow these instructions in reverse order.