



Google Chromebook Pixel 2 Back Panel Replacement

This guide will help you remove and replace the back panel of your Chromebook.

Written By: Garrett Monteiro



INTRODUCTION

This guide describes the necessary steps to remove the back panel of the device. This is a prerequisite for accessing all of the internal components of the device.

TOOLS:

- [Phillips #00 Screwdriver](#) (1)

Step 1 — Back Panel



! Working on your device while it is turned on may result in electric shock. Make sure to shut down and unplug your device before you begin.


- Flip your device over so the bottom panel is facing up.

Step 2



- Peel off the black rubber strips from top and bottom of the back panel.

Step 3

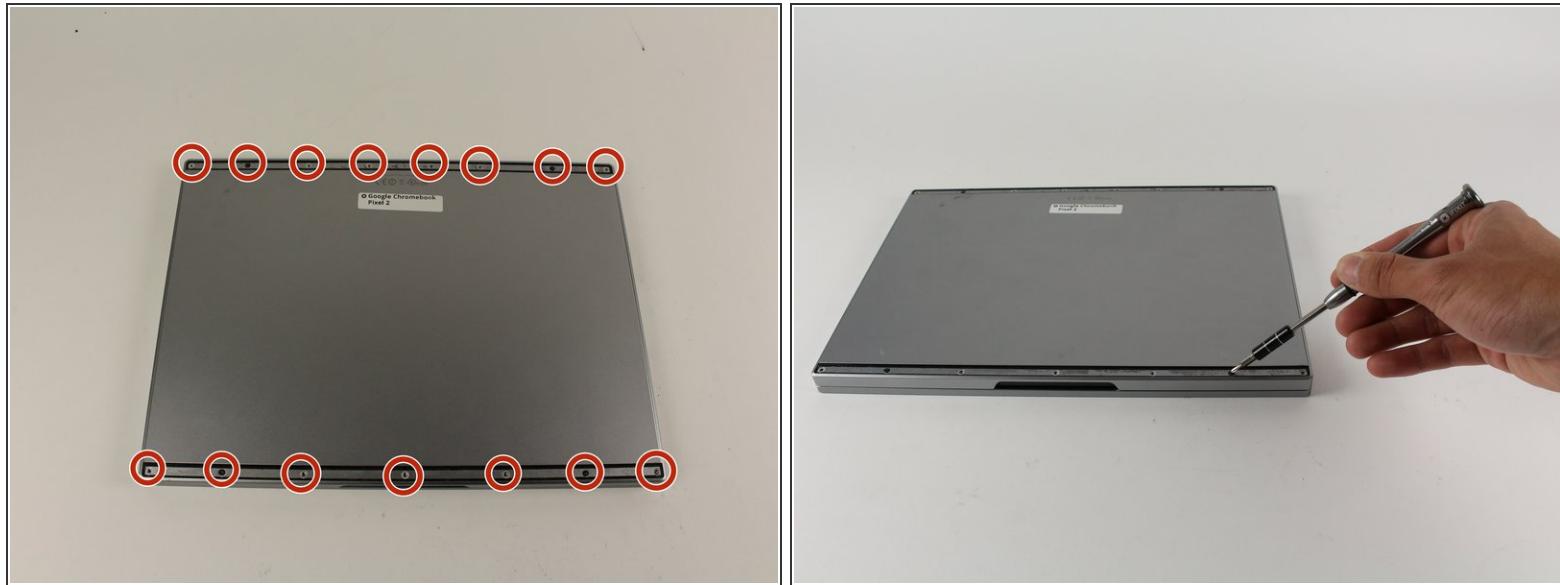

- Remove the fifteen 3 mm Phillips #00 screws from the back panel.

Step 4



- Carefully lift the back panel off of the device.

To reassemble your device, follow these instructions in reverse order.