



Google Pixel 2 XL Midframe Replacement

Prerequisite-only guide to remove the midframe in a Google Pixel 2 XL.

Written By: Adam O'Camb




INTRODUCTION

Prerequisite-only guide to remove the midframe in a Pixel 2 XL.

TOOLS:

- Essential Electronics Toolkit (1)

Step 1 — Midframe

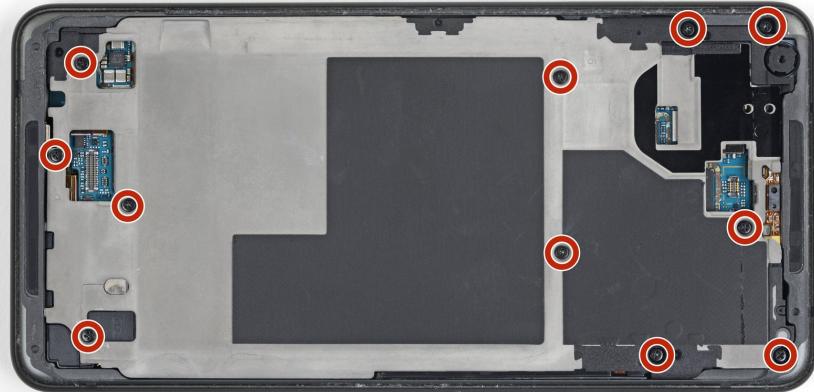

- Remove eleven 3.8 mm Phillips screws securing the midframe.

Step 2



- Insert an opening tool into the notch in the midframe near the volume buttons and pry the midframe up and away from the rest of the phone.
- Remove the midframe.

To reassemble your device, follow these instructions in reverse order.