



# Graco Literider Classic Connect Seat Replacement

This guide will show you how to replace the seat.

Written By: Tyler Laird



## INTRODUCTION

This guide shows how to locate the screws and fasteners, as well as how to remove them. It also shows how to remove the seat from the frame.

### TOOLS:

- [Phillips #1 Screwdriver \(1\)](#)

## Step 1 — Seat



- Flip the stroller over so the back of the seat points upward.
- Locate the twelve 12 mm Phillips screws holding the fabric to the frame of the stroller. Six are found along the back of the seat, and the other six are along the bottom of the seat.

## Step 2




- Using a Phillips #1 screwdriver, remove the twelve 12 mm screws and set them aside.

### Step 3



- Locate the two buttons holding the fabric basket frame on either side of the stroller.
- Unbutton the two buttons.

### Step 4

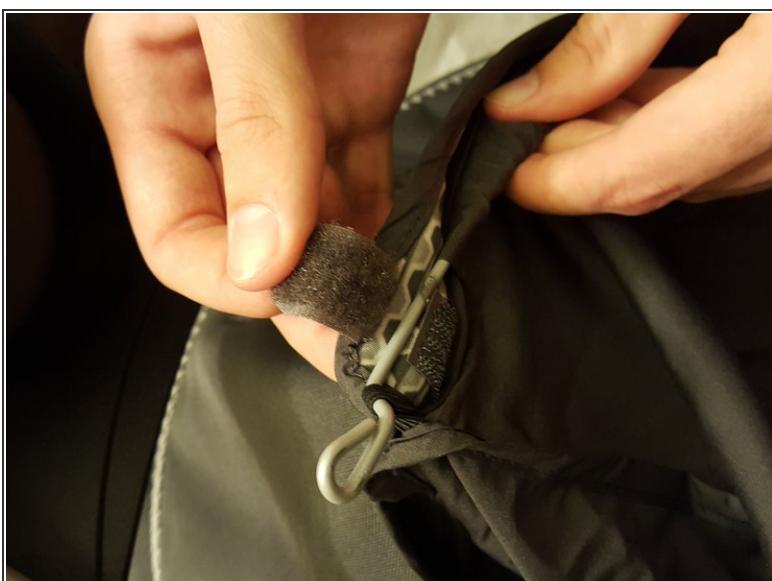

- Locate the three velcro straps holding the seat to the canopy.
- Undo the three straps.

## Step 5



- Remove the seat from the frame.

☞ When replacing the seat on the frame, some additional force may be required to insert the screws into their proper places.

To reassemble your device, follow these instructions in reverse order.