




HKC P776A Battery Replacement

This will guide you through replacing the battery.

Written By: Ryan Gornati

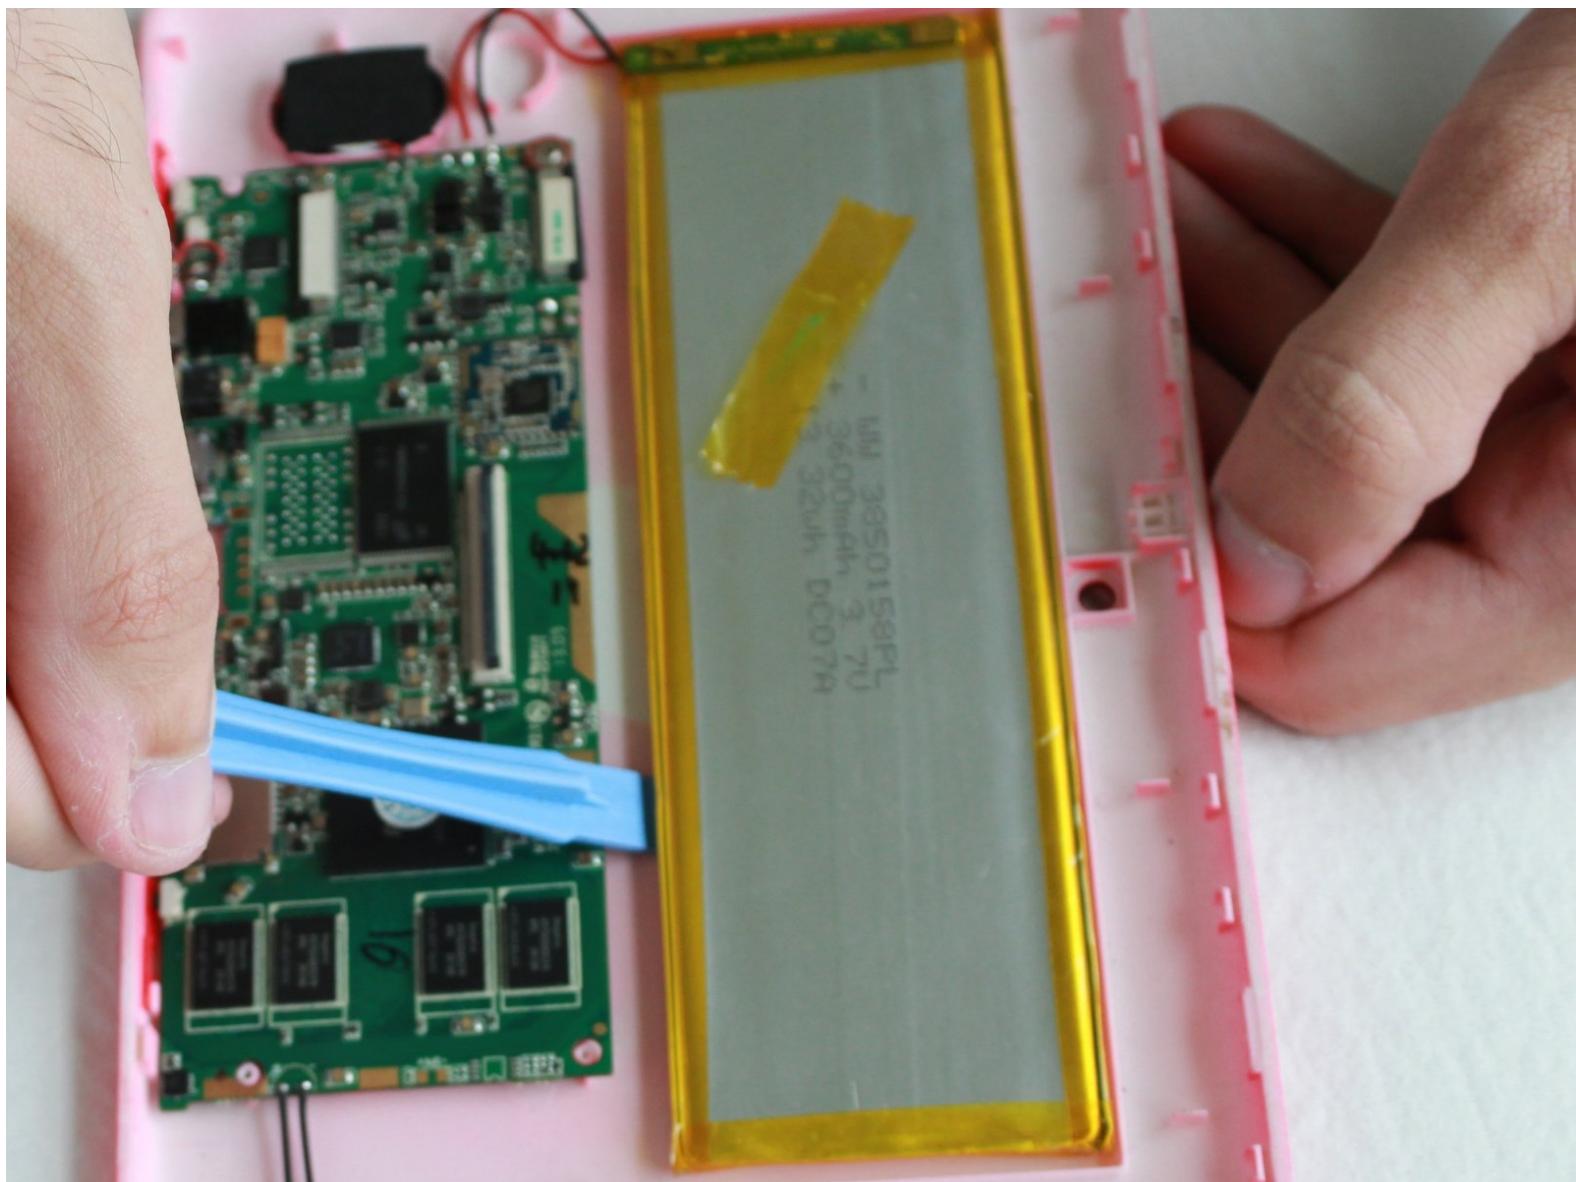

 **TOOLS:**


- [iFixit Opening Tools \(1\)](#)
- [Soldering Iron \(1\)](#)
- [Solder \(1\)](#)
- [Desoldering Pump \(1\)](#)
- [Spudger \(1\)](#)

Step 1 — Separating Digitizer and Case




- Insert the plastic opening tool between the digitizer and the case.
- Place the spudger in the gap created by the plastic opening tool to assist in separation.

Step 2

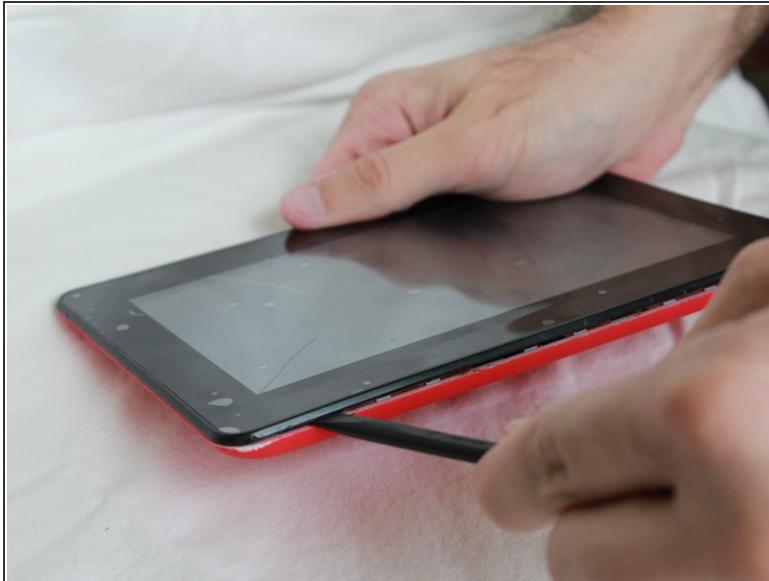

- Slide the spudger along the perimeter of the device to fully separate the two pieces.

Step 3 — Battery

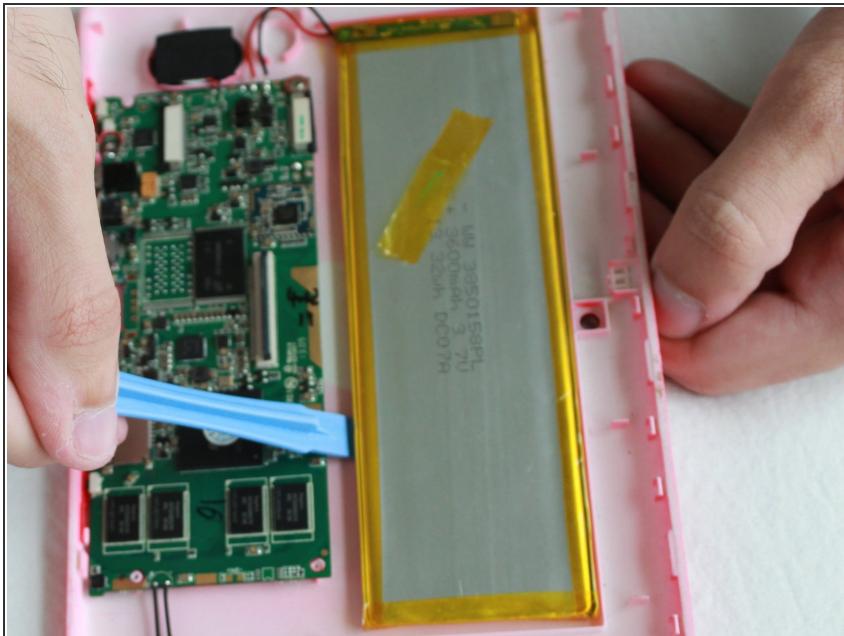

- Insert the plastic opening tool between the battery and case.
- Apply leverage to break the glue that is attaching the battery to the case.


Step 4



- Continue breaking the glue along the perimeter of the battery until the battery can be removed.

(i) Breaking all the glue between the battery and case may take a long time.

Step 5

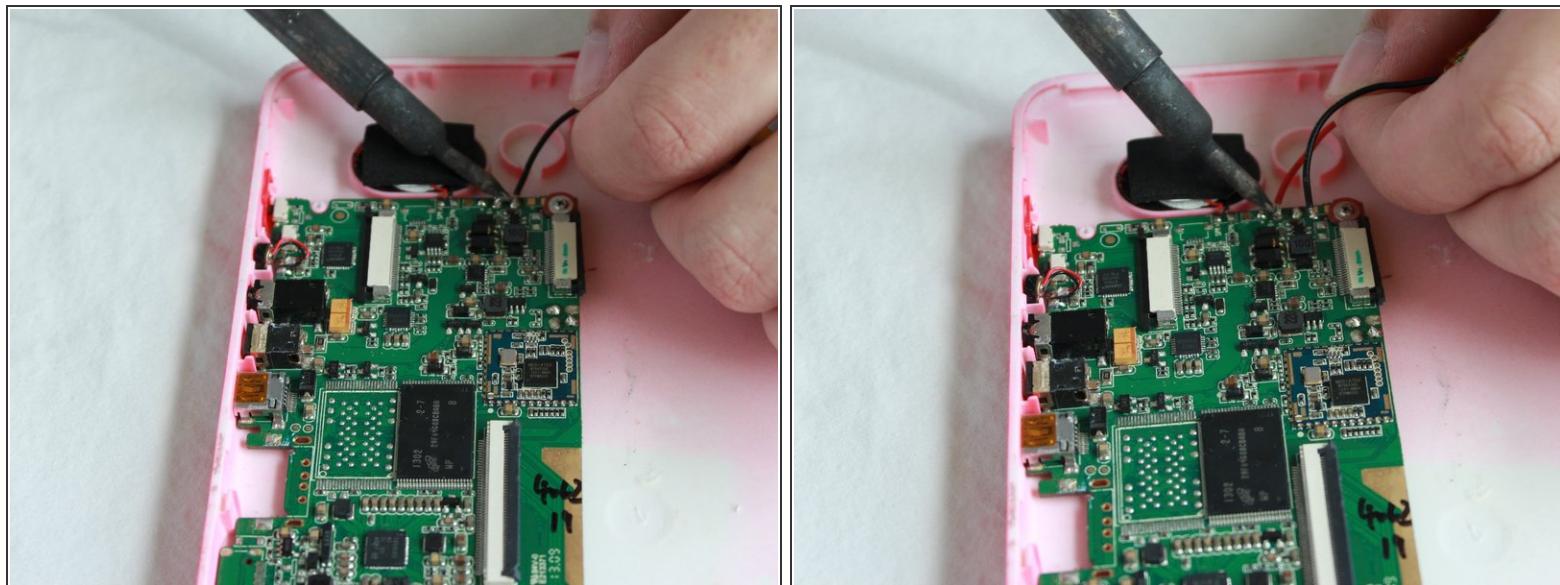

- Using the soldering iron, heat up the solder that is attaching the battery to the motheboard.

⚠ The heat from the soldering iron may cause personal injury or damage the internal components of the tablet.

Step 6



- Suck up the leftover solder using the desoldering pump.
- Remove the battery from the motherboard.

To reassemble your device, follow these instructions in reverse order.