




HKC P776A Camera Replacement

This will guide you through replacing the camera.

Written By: Ryan Gornati

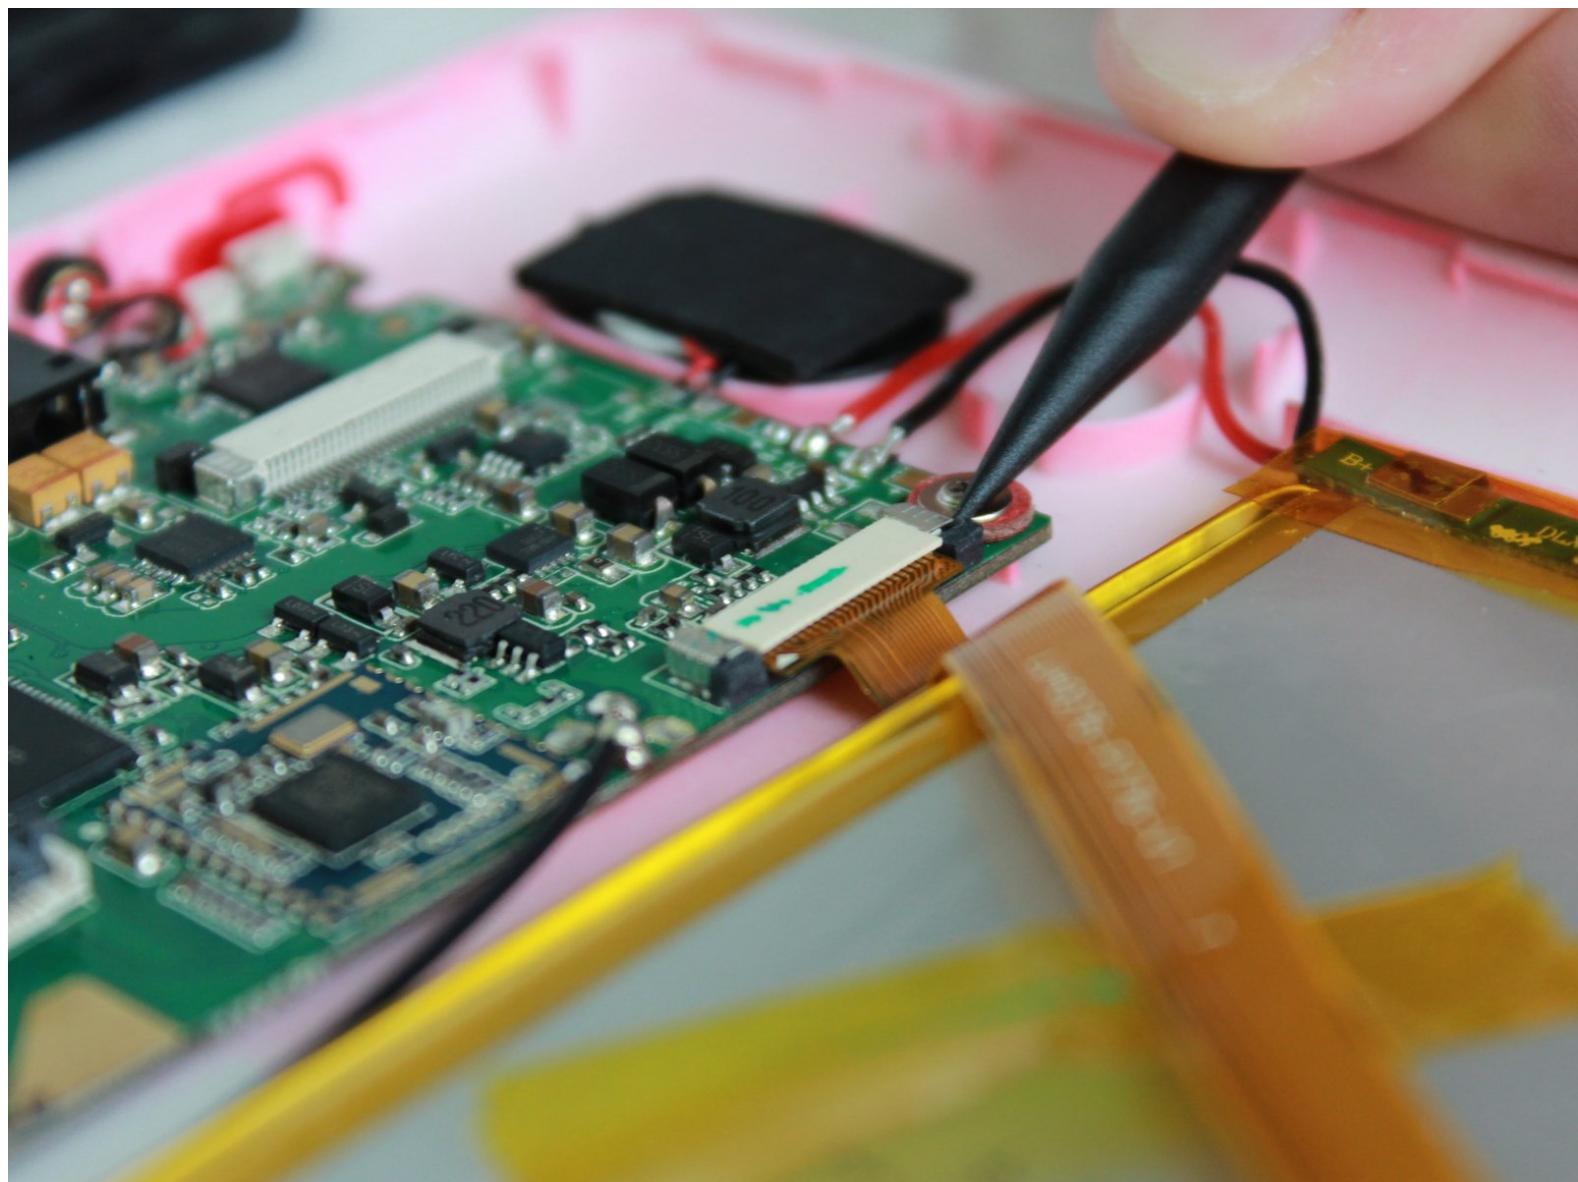

 **TOOLS:**


- [iFixit Opening Tools \(1\)](#)
- [Spudger \(1\)](#)

Step 1 — Separating Digitizer and Case





- Insert the plastic opening tool between the digitizer and the case.
- Place the spudger in the gap created by the plastic opening tool to assist in separation.

Step 2

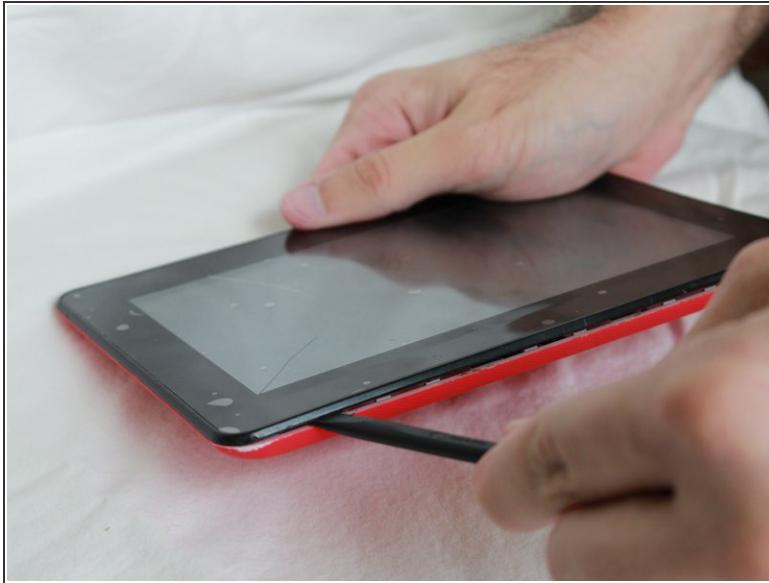


- Slide the spudger along the perimeter of the device to fully separate the two pieces.

Step 3 — Removing the Cable from the Moatherboard

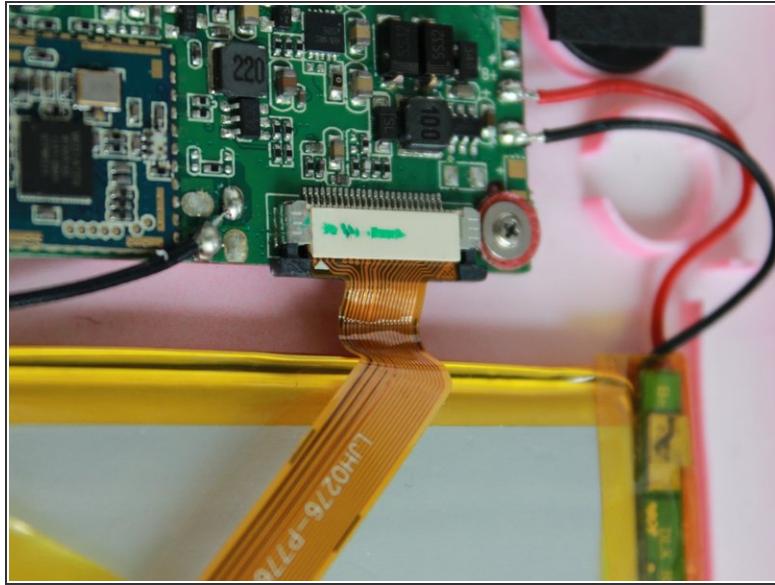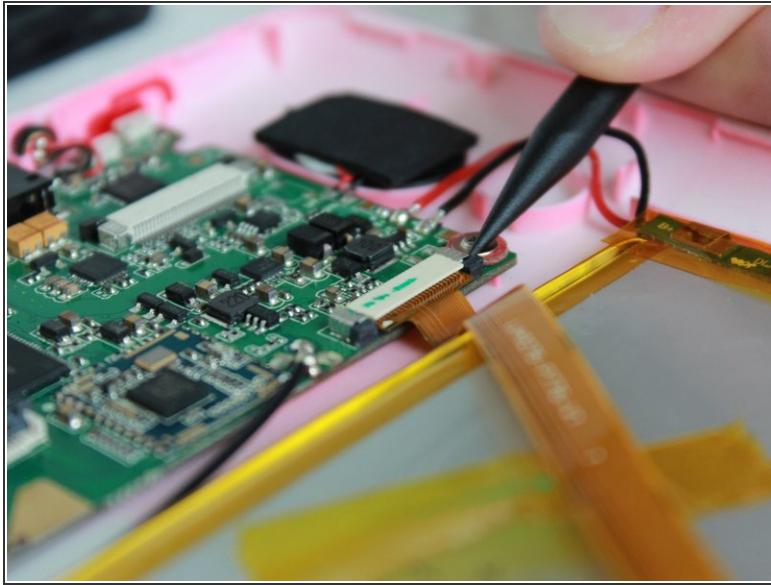

- Use the tip of the spudger to release the latches on the motherboard.

Step 4

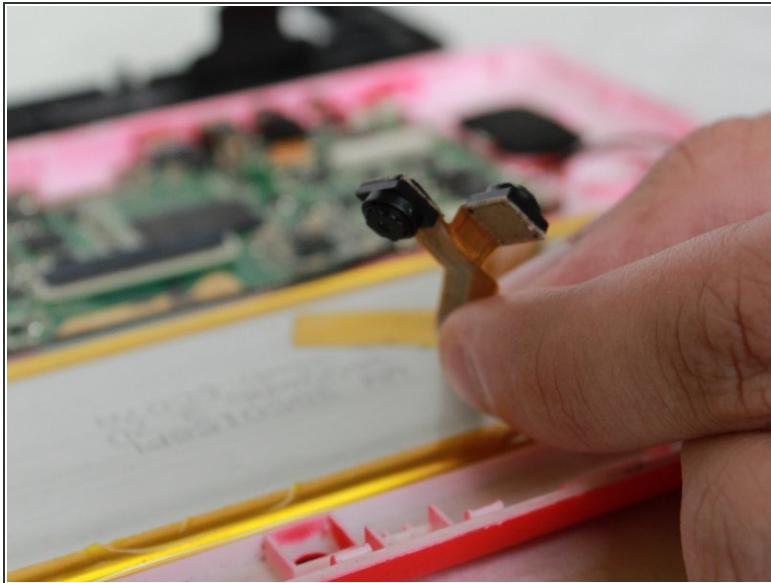

- Remove the camera from the device.

To reassemble your device, follow these instructions in reverse order.