



# HKC P776A Digitizer Replacement

This will guide you through replacing the digitizer.

Written By: Spencer Pheasant



 **TOOLS:**


- [iFixit Opening Tools \(1\)](#)
- [Spudger \(1\)](#)

## Step 1 — Separating Digitizer and Case




- Insert the plastic opening tool between the digitizer and the case.
- Place the spudger in the gap created by the plastic opening tool to assist in separation.

## Step 2

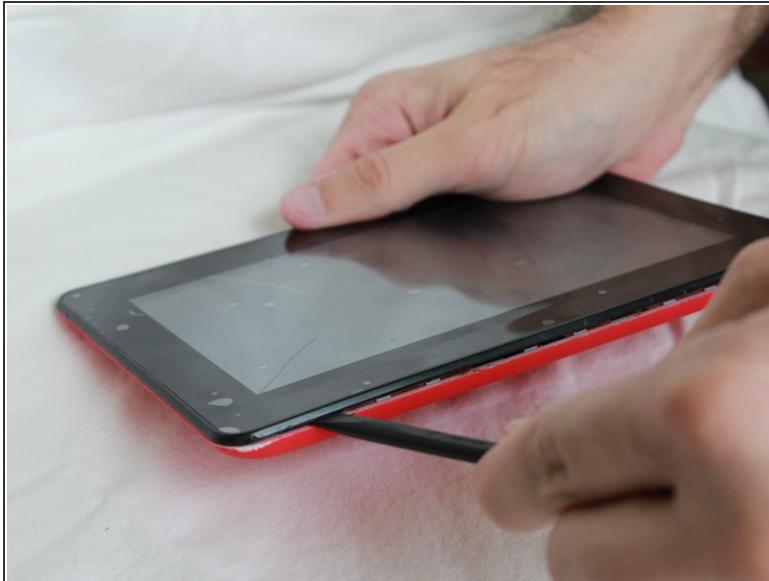



- Slide the spudger along the perimeter of the device to fully separate the two pieces.

## Step 3 — Separating the Screen and the Digitizer

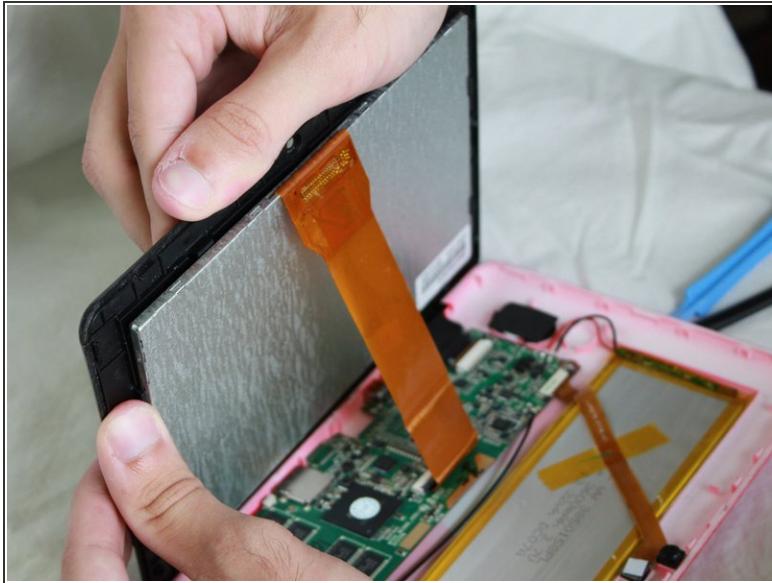

- Use your fingers to pop the screen out from the digitizer.

## Step 4 — Removing the Cable from the Motherboard

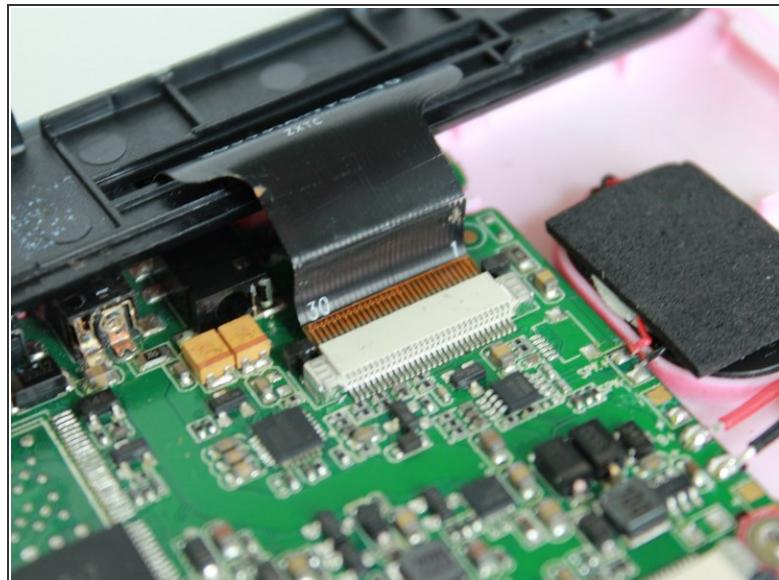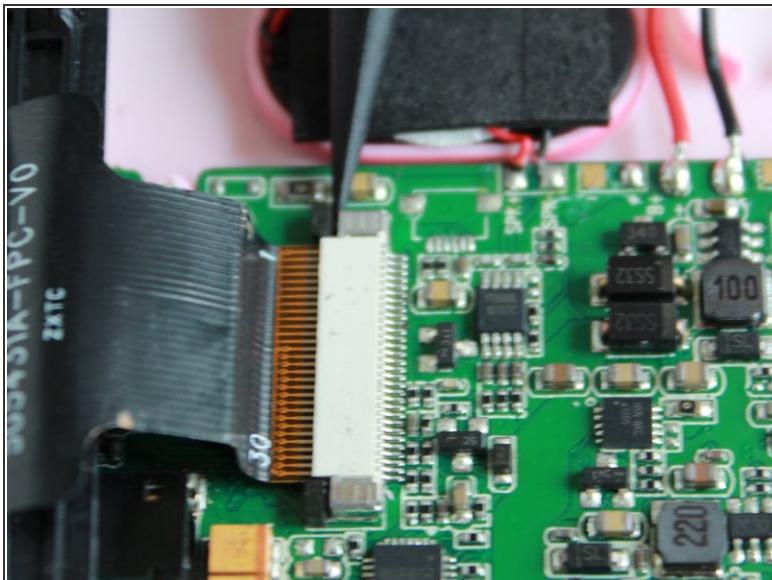

- Use the tip of the spudger to release the latches on the motherboard.

## Step 5



- Remove the cable from the motherboard.

To reassemble your device, follow these instructions in reverse order.