



HKC P776A Rear Case Replacement

This guide will show how to disassemble the outer shell of the device.

Written By: Spencer Pheasant



 **TOOLS:**



- [Spudger \(1\)](#)
- [iFixit Opening Tools \(1\)](#)

Step 1 — Separating Digitizer and Case



- Insert the plastic opening tool between the digitizer and the case.
- Place the spudger in the gap created by the plastic opening tool to assist in separation.

Step 2

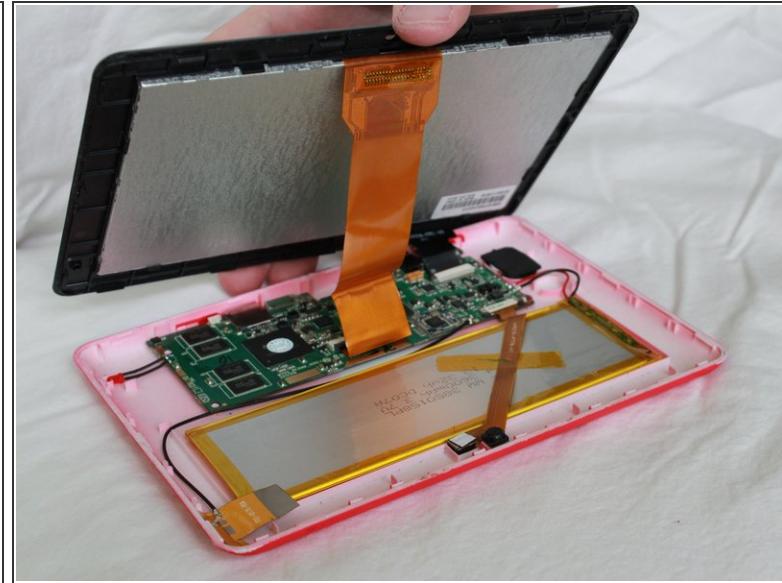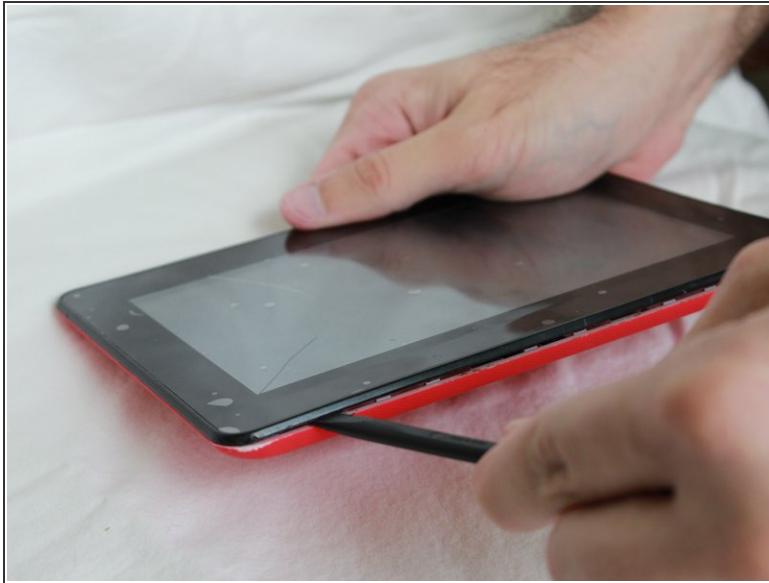

- Slide the spudger along the perimeter of the device to fully separate the two pieces.

To reassemble your device, follow these instructions in reverse order.