




HKC P776A Screen Replacement

This guide will show how to replace the screen.

Written By: Spencer Pheasant

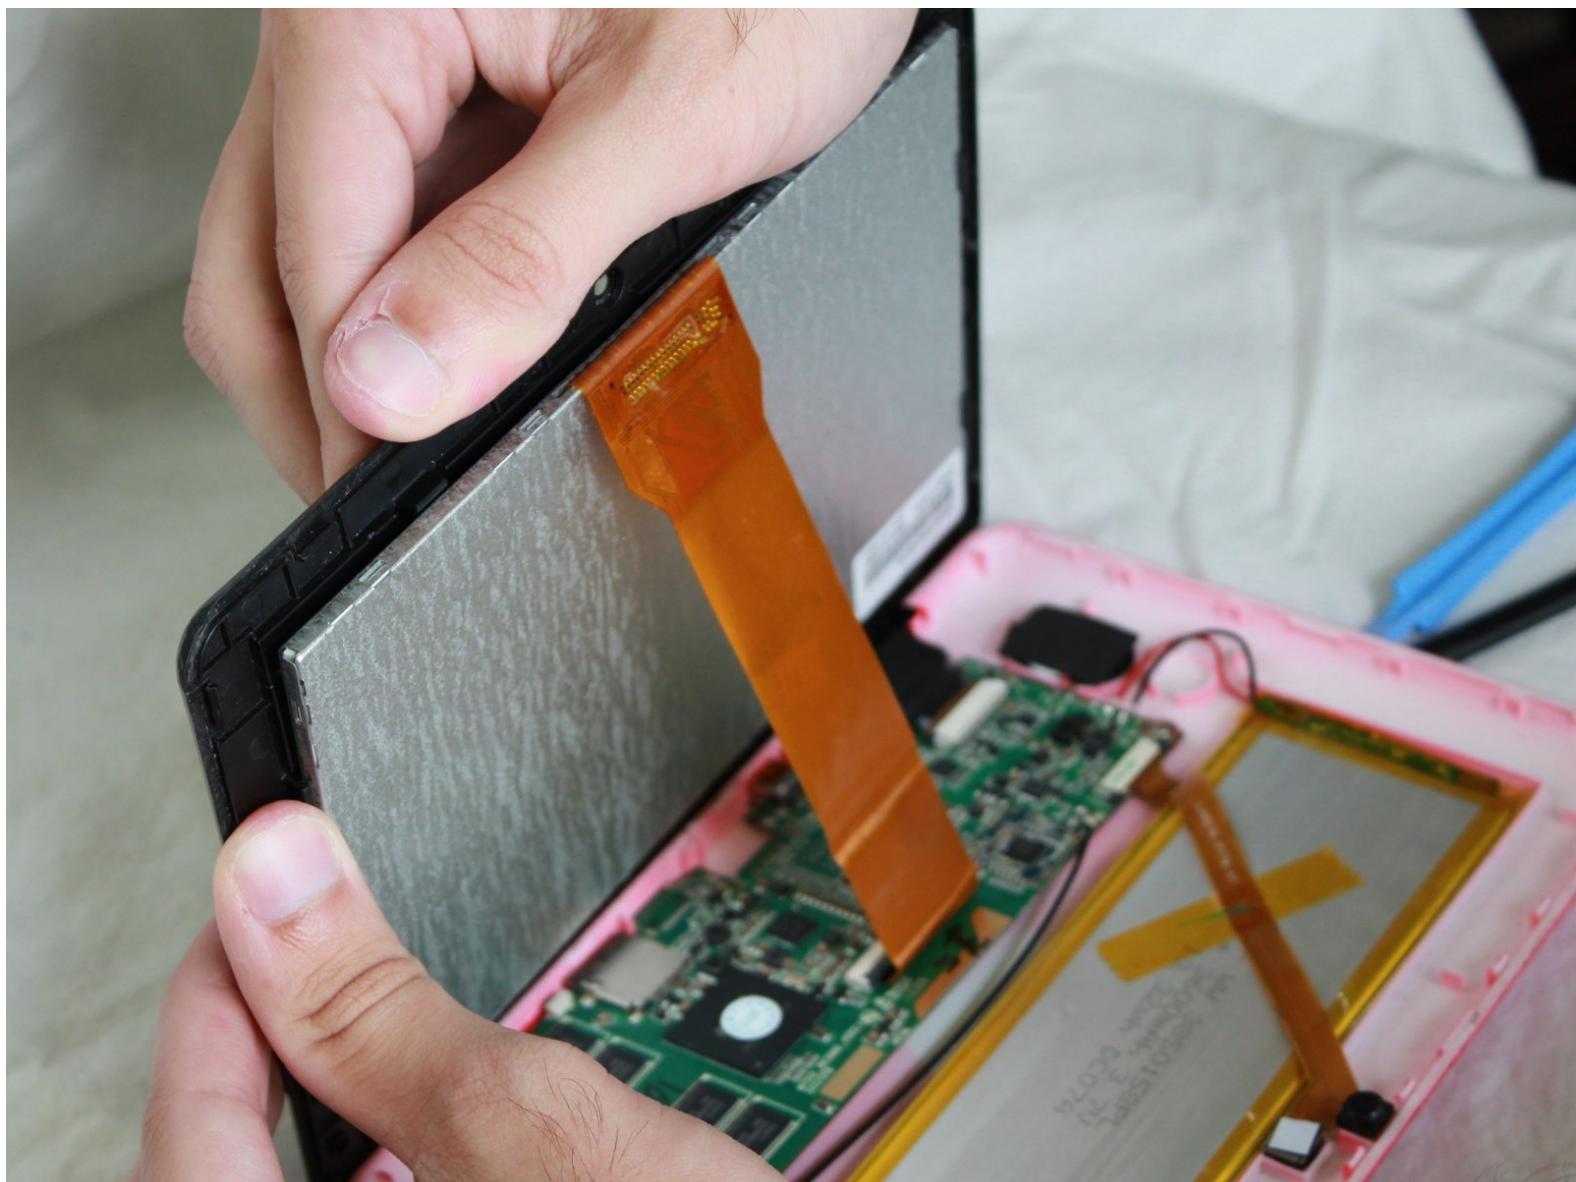

 **TOOLS:**


- [iFixit Opening Tools \(1\)](#)
- [Spudger \(1\)](#)

Step 1 — Separating Digitizer and Case




- Insert the plastic opening tool between the digitizer and the case.
- Place the spudger in the gap created by the plastic opening tool to assist in separation.

Step 2

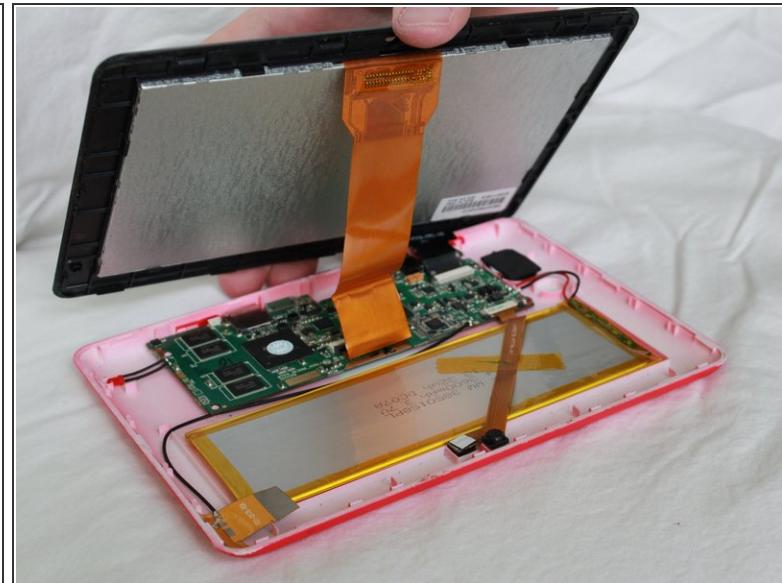


- Slide the spudger along the perimeter of the device to fully separate the two pieces.

Step 3 — Separating the Screen and Digitizer

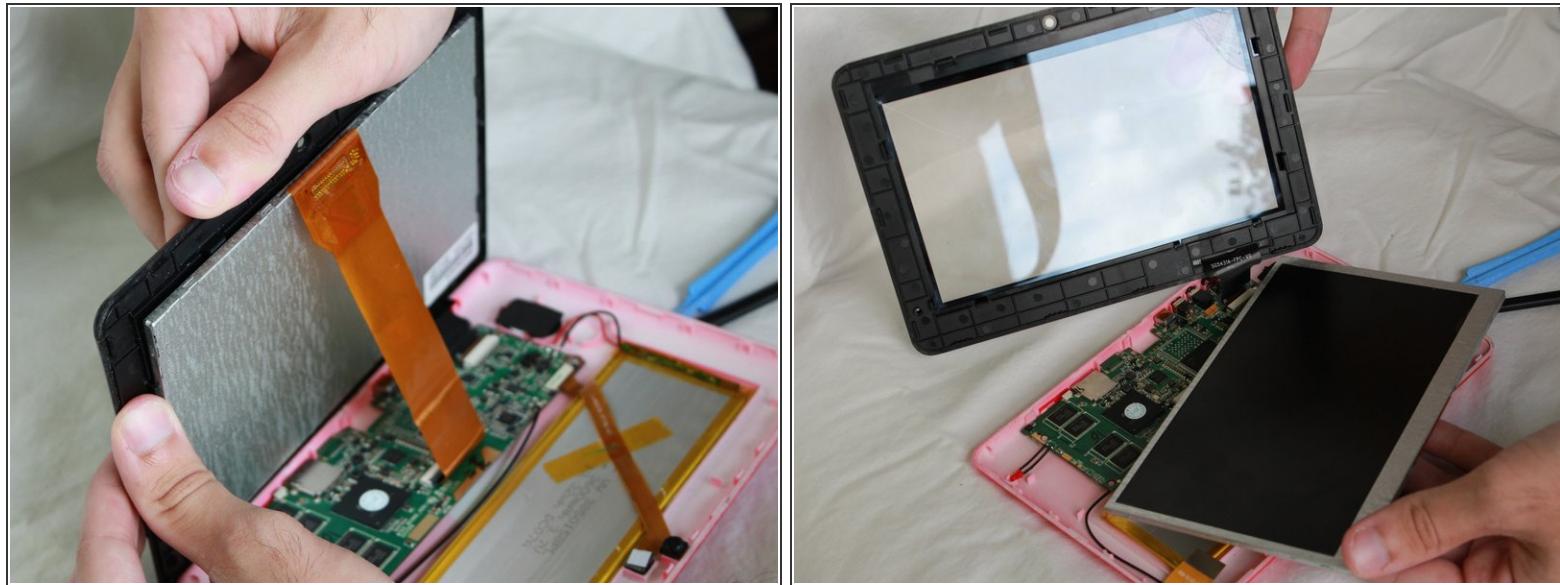


- Use your fingers to pop the screen out from the digitizer.

Step 4 — Removing the Optical Cord from the Motherbaord

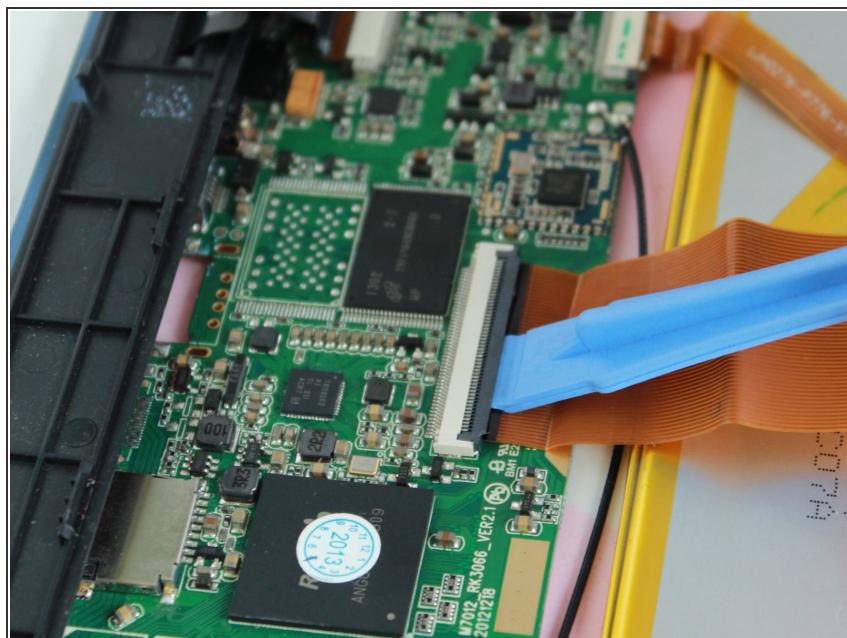

- With the plastic opening tool, lift the black latch up.

Step 5

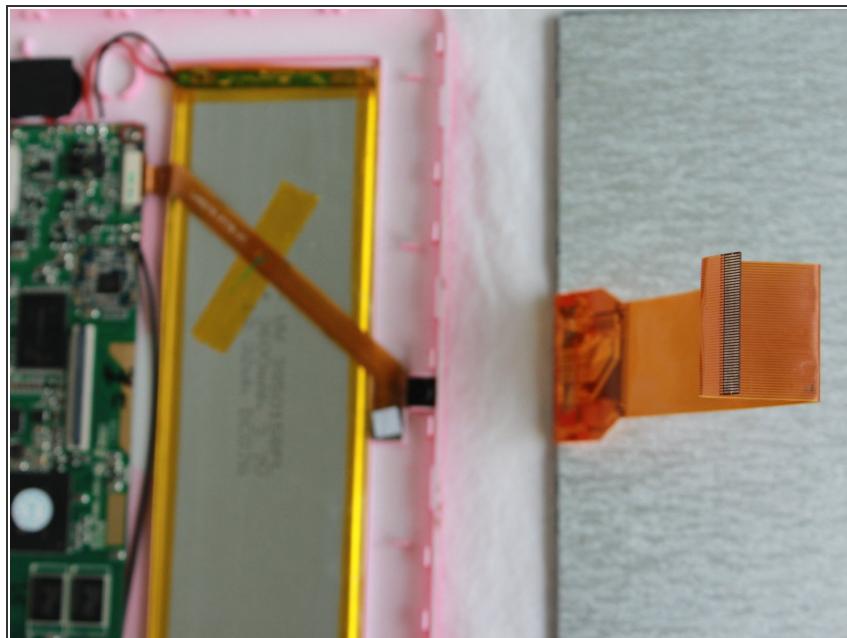

- Pull the optical cord out from the motherboard.

To reassemble your device, follow these instructions in reverse order.