




# HP 15-ba0709dx Screen Replacement

This will take you through the steps of getting to and replacing the screen in the HP 15-ba0709dx

Written By: Zach Litkenhus





## Step 1 — Screen

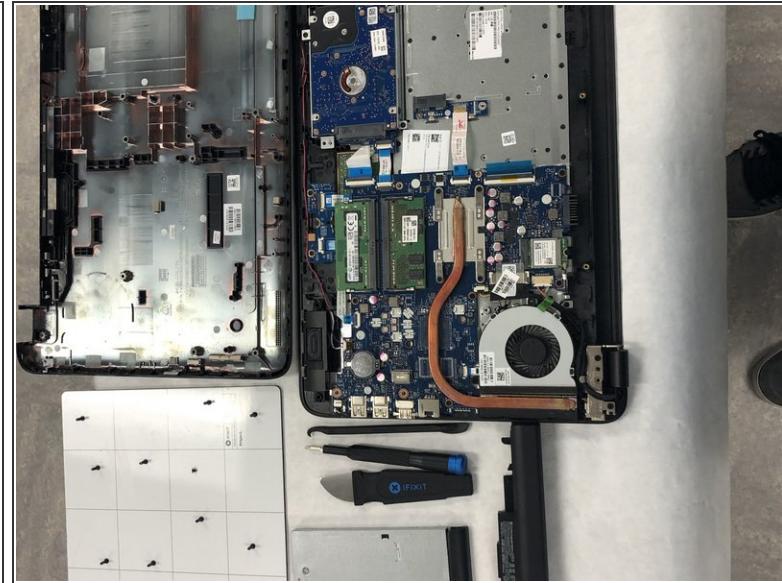


- Remove the battery
- Remove the 12 screws from the back plate including 4 screws underneath rubber feet.
- Remove the backplate

## Step 2

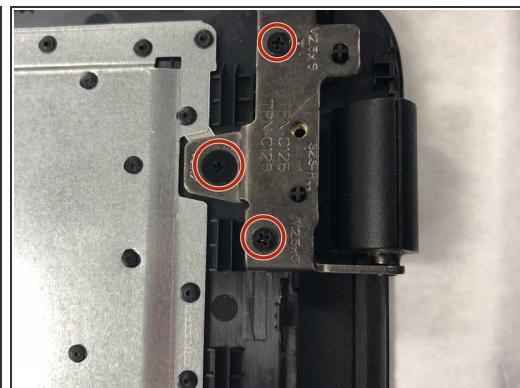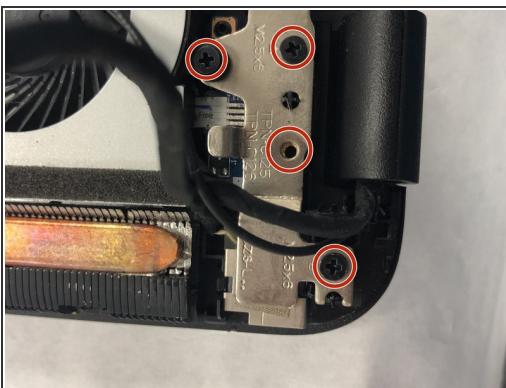

- Unplug webcam and WiFi cables (remove sticker from cable and pull horizontally)
- Remove the screw for the fan and lift out of the way
- Remove all screws from the hinges and lift them off of the Motherboard plate

## Step 3

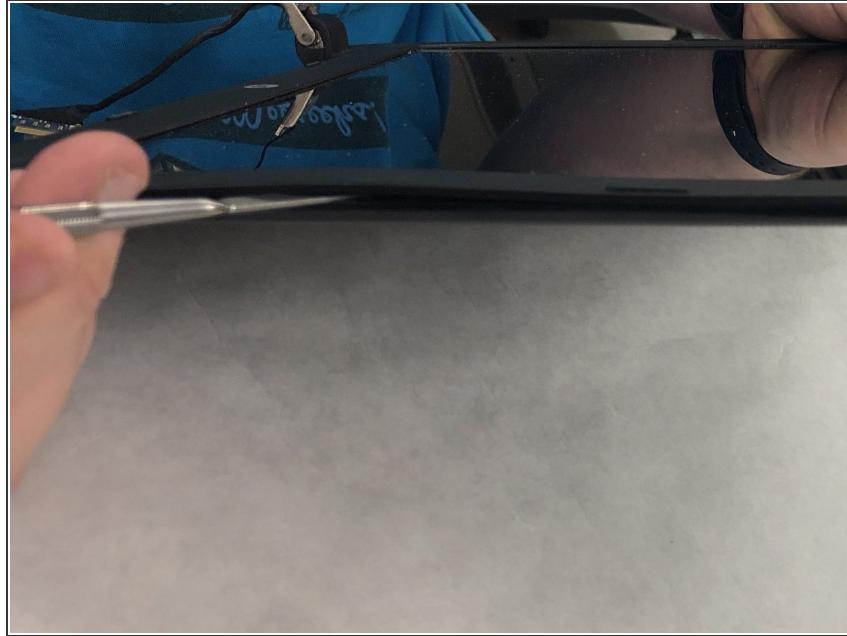

- Remove Screen from keyboard and motherboard tray
- Using a flat tool separate the bezel from the screen housing

## Step 4



- Remove the 4 screws from around the screen
- Pull screen away from housing

## Step 5



- Remove the cable connected to the screen and replace with a new screen
- Follow assembly in reverse

To reassemble your device, follow these instructions in reverse order.