



# HP 15-da0002dx Back Cover Replacement

Follow these steps to take off the back cover of your HP 15-da0002dx.

Written By: Abigail Aron



## INTRODUCTION

Use this guide to take off the back cover of the HP 15-da0002dx laptop. The back cover of a laptop is taken off in order to expose the components inside of a computer to replace or clean them.

Before using this guide, power off the computer and wait for the components to cool. Working over a non-carpeted surface will reduce the risk of ESD damage (electrostatic discharge). A non-carpeted surface should not be able to conduct electricity and is connected to a grounded surface. Another way to reduce the risk of ESD damage is by using a plastic tool when removing the battery as plastic does not conduct electricity.

## TOOLS:

- [iFixit Opening Tools](#) (1)
- [Phillips #1 Screwdriver](#) (1)

## Step 1 — Back Cover




- Make sure the computer is completely turned off.

## Step 2




- Turn over the laptop.
- The HP label should be touching the table and the bottom cover should be facing up.

## Step 3

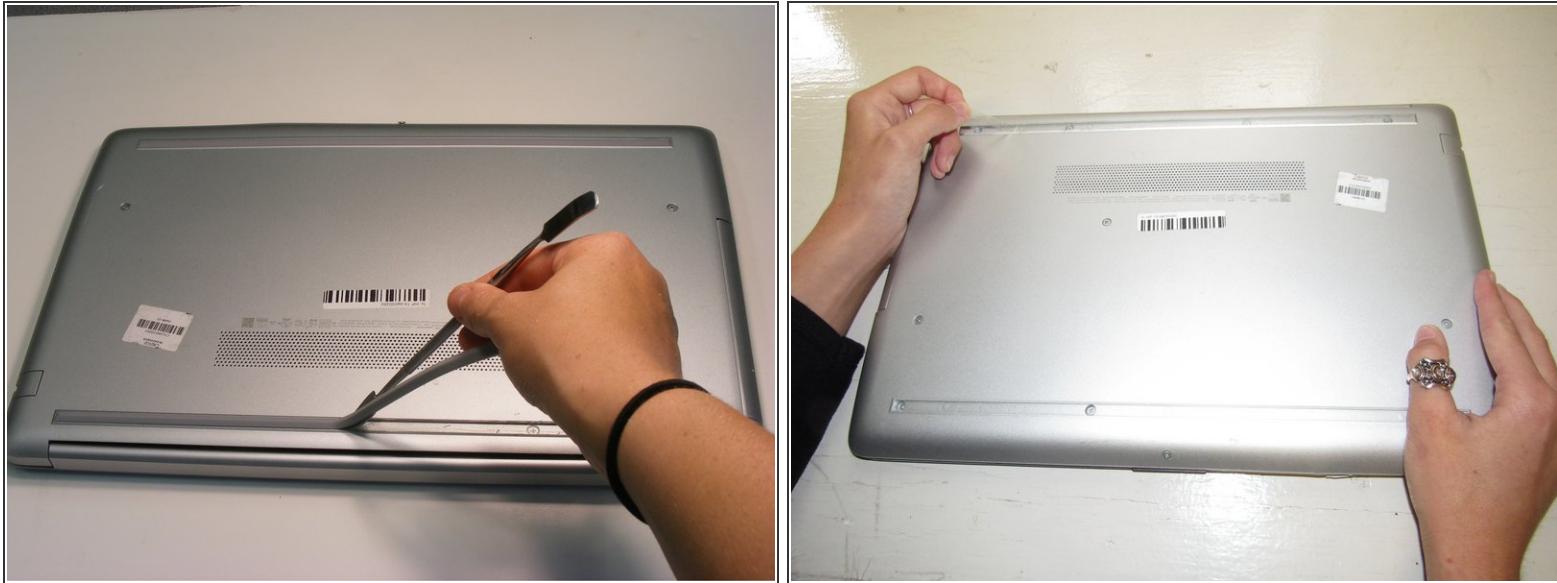

- Two plastic feet are located on adjacent sides of the back cover.
- Peel back the plastic feet using the plastic opening tools.

## Step 4

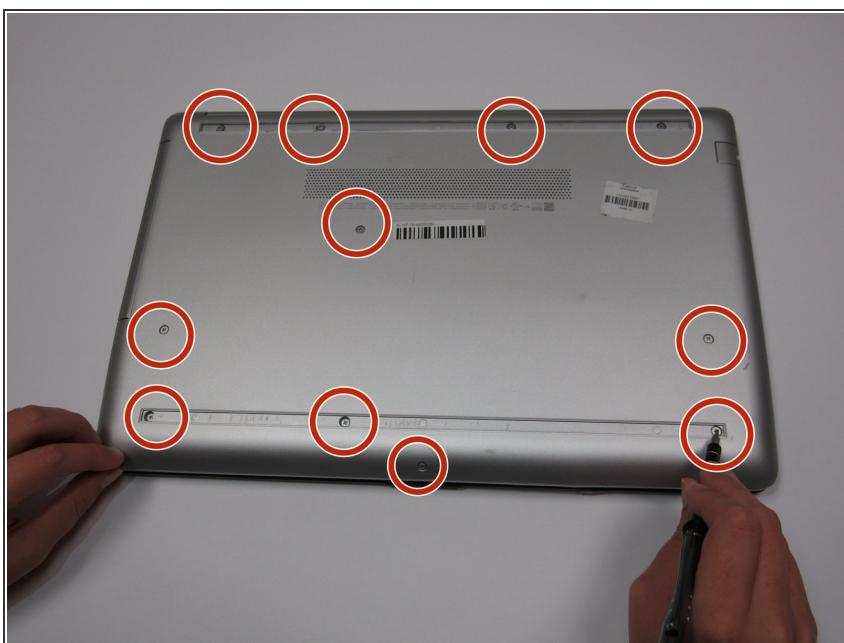

- Using the Phillips #1 screwdriver, unscrew the eleven 9.0 mm screws holding the back cover in place.

## Step 5




- Carefully flip over the computer so the HP label is now facing the ceiling.

## Step 6



- Open the screen.
- Run the plastic opening tools along the edge of the back cover. Do this until the back cover becomes loose.

## Step 7

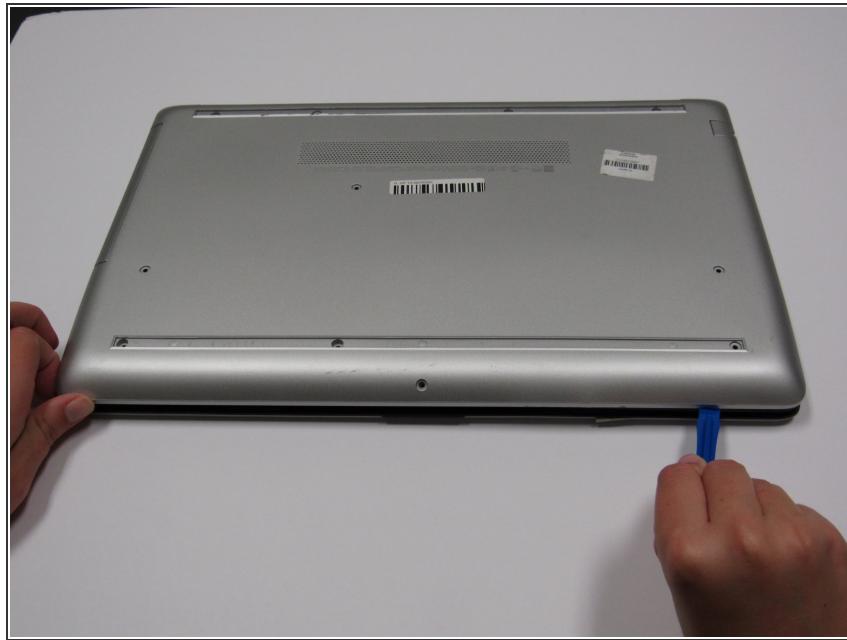

- Close the screen and flip over the laptop. Using the plastic opening tools, gently take off the back cover starting from the middle, bottom edge.

To reassemble your device, follow these instructions in reverse order.