



HP 15-f162dx Motherboard Replacement

This is a guideline helping replace a motherboard.


Written By: Abdulrahman Bogshan



 **TOOLS:**


- Fingers (1)
- Essential Electronics Toolkit (1)

Step 1 — Battery

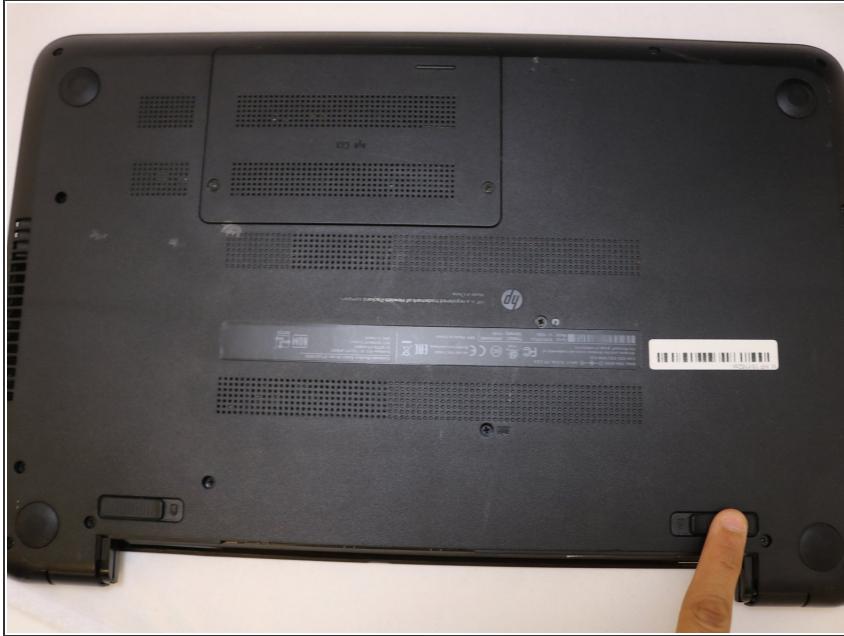

- Pull back the lock.

Step 2

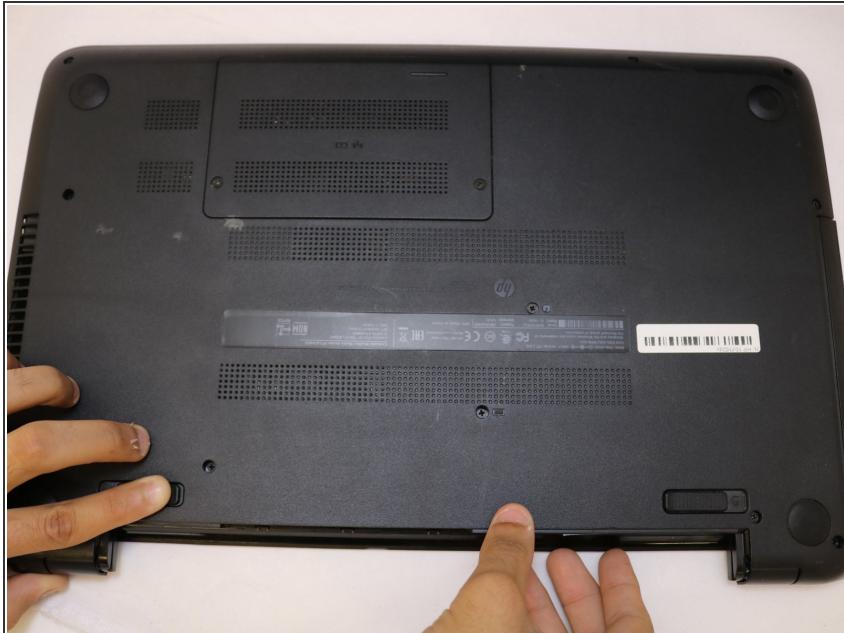

- Take off the battery

Step 3 — Motherboard




- Use phillips screwdriver flathead 2.5 mm to open the cover.

Step 4




- Use the Metal spudger set to gently open the front cover

Step 5

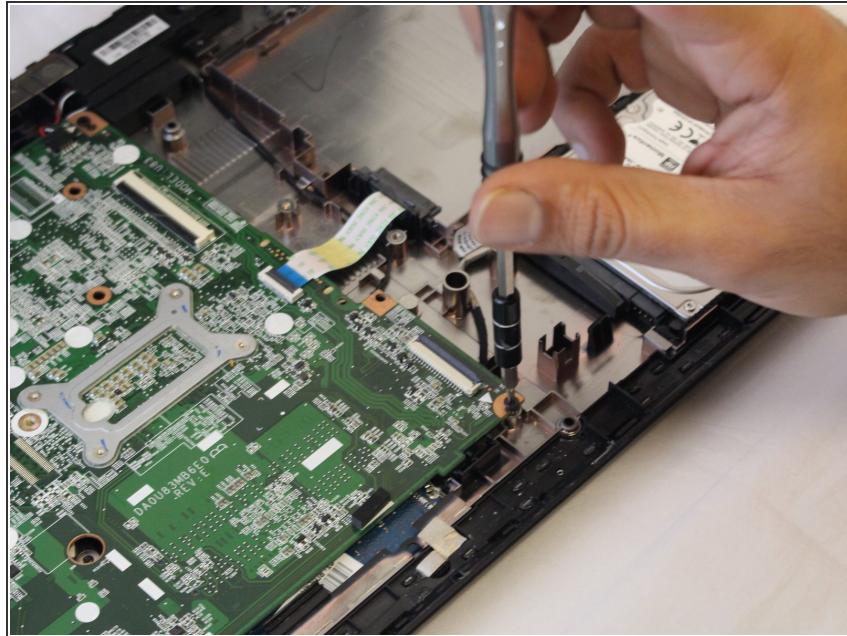

- Use phillips screwdriver JIS J00 to open the screws that holding the motherboard.

Step 6

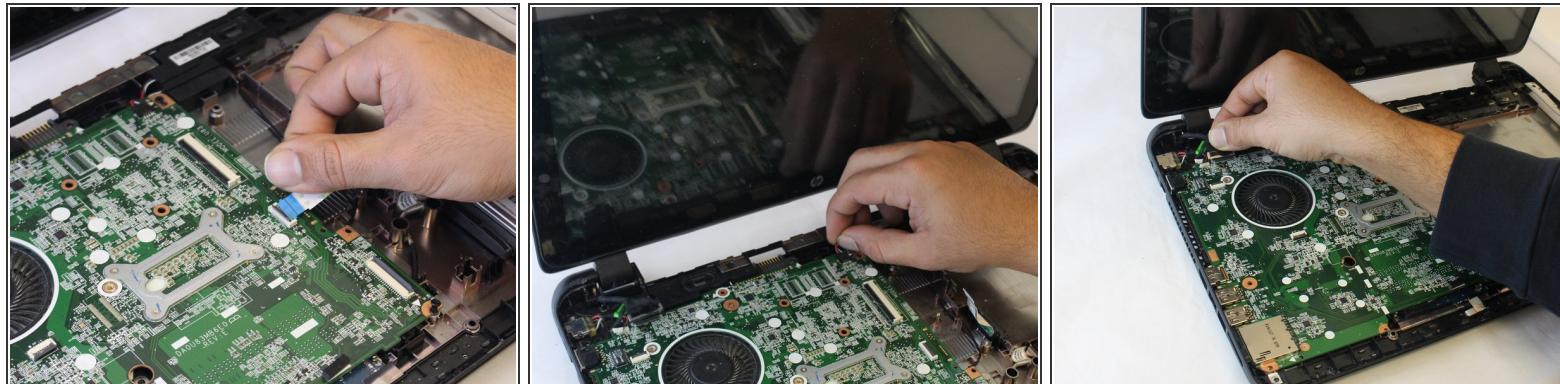

- Pull out the wires connected to the motherboard, so that it is removable. Then, replace the motherboard.

To reassemble your device, follow these instructions in reverse order.