




HP 7 Plus 1302 Back Cover Replacement

Replacing the Back Cover of your HP 7 Plus 1302

Written By: Marquies

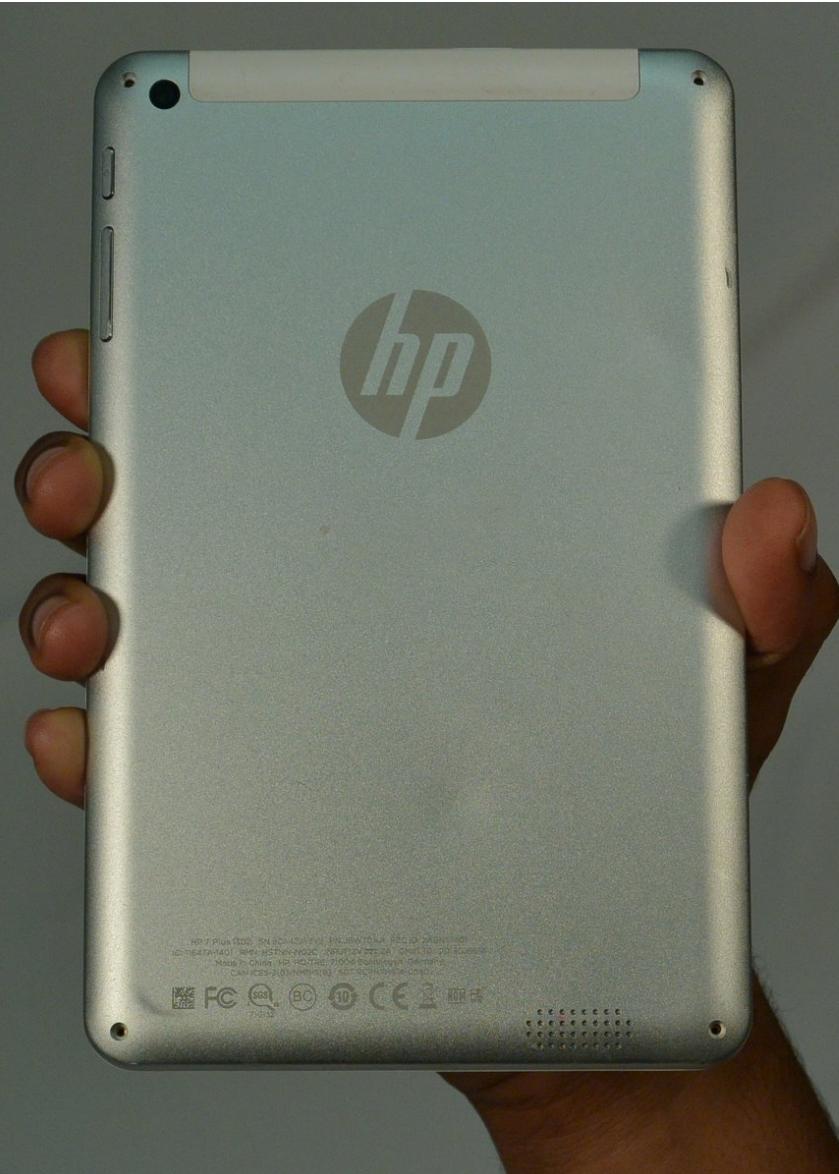


INTRODUCTION

Need to remove your back cover to replace it or access internal parts? Use this guide to get it off (requires T5 Torx Screwdriver)

TOOLS:

- [iFixit Opening Tools](#) (1)
- [T5 Torx Screwdriver](#) (1)


Step 1 — Back Cover

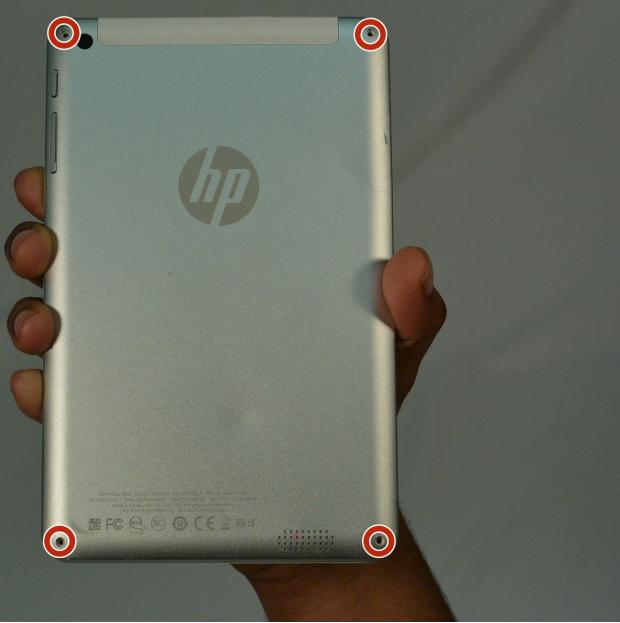

- Using the T5 Torx Screwdriver, remove the T5x3mm screws located in all 4 corners.

 Device should be turned off and unplugged before starting the replacements.


Step 2

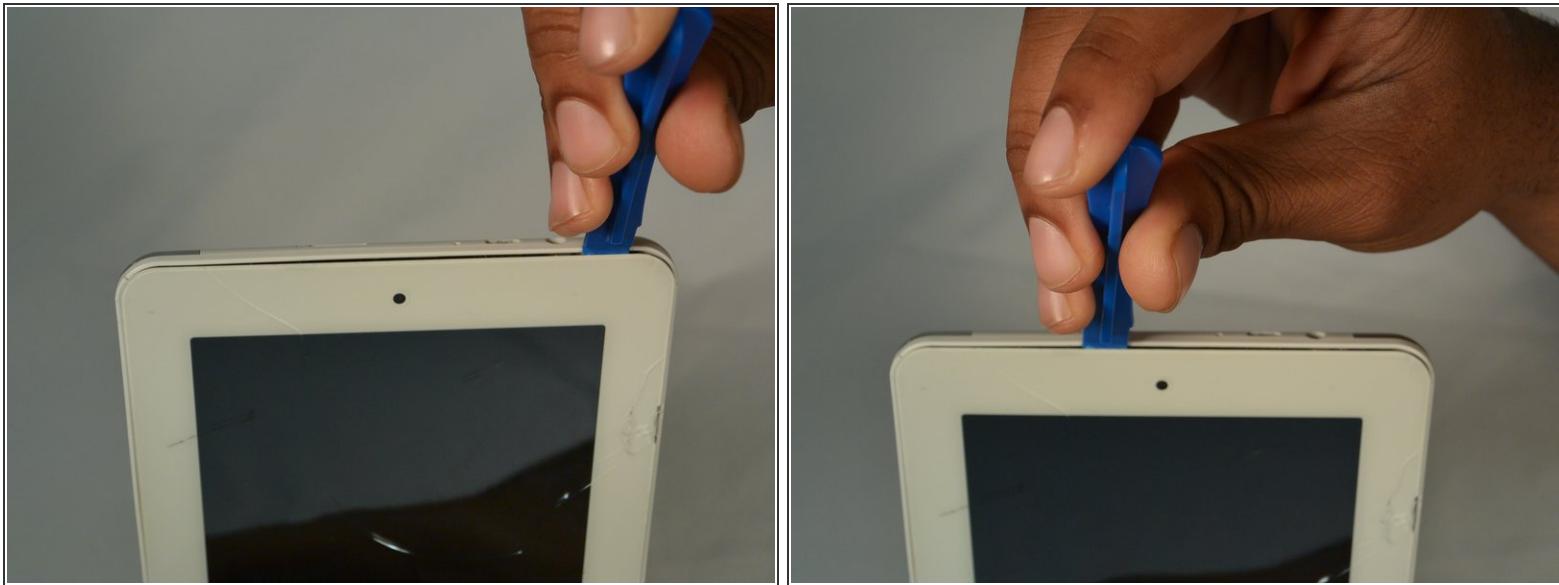

- Use the plastic opening tool to push in between the front and the back of the tablet.
- Slide the plastic opening tool around all 4 sides of the tablet to separate the back cover.

 Be careful when you are trying to remove the back as it can damage the screen if you force it too much.

Step 3

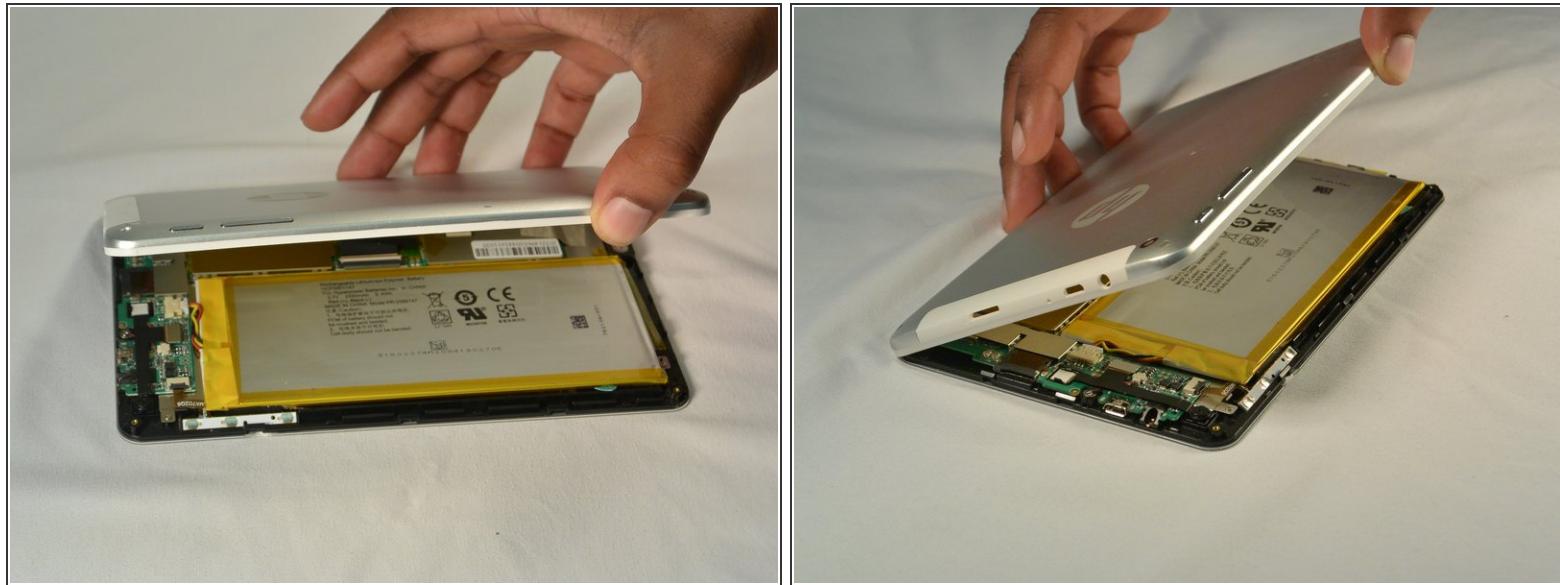

- Continue sliding the plastic opening tool around the tablet until all 4 sides are separated from each other.
- Remove the back cover.

To reassemble your device, follow these instructions in reverse order.