



HP 7 Plus 1302 Battery Replacement

Using this guide you will be able to remove the rear cover and replace the battery.

Written By: Jason



INTRODUCTION

Changing the battery may be necessary if the device wont power up, or doesn't seem to hold a charge anymore. The most challenging step to changing the battery is removing the back cover. Acquiring the tools listed (or similar) are absolutely necessary for a complication free battery replacement.


TOOLS:

- iFixit Opening Tools (1)
- Metal Spudger (1)
- Spudger (1)
- T5 Torx Screwdriver (1)

PARTS:

- Double-Sided Tape (1)


Step 1 — Back Cover

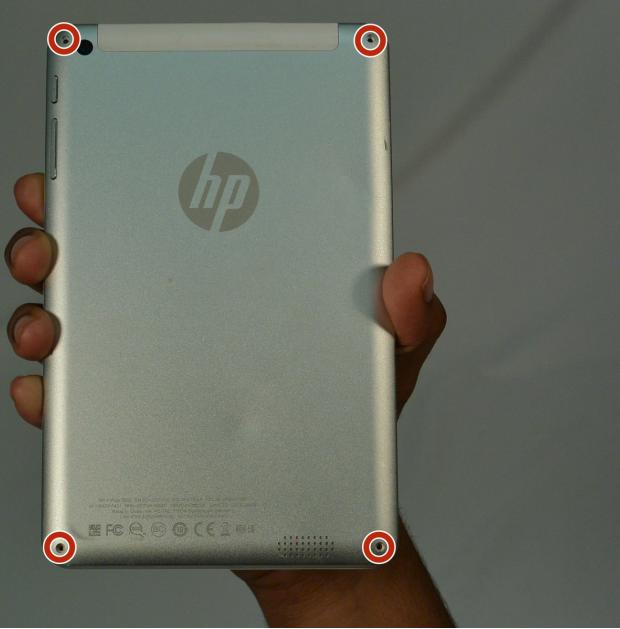

- Using the T5 Torx Screwdriver, remove the T5x3mm screws located in all 4 corners.

 Device should be turned off and unplugged before starting the replacements.


Step 2

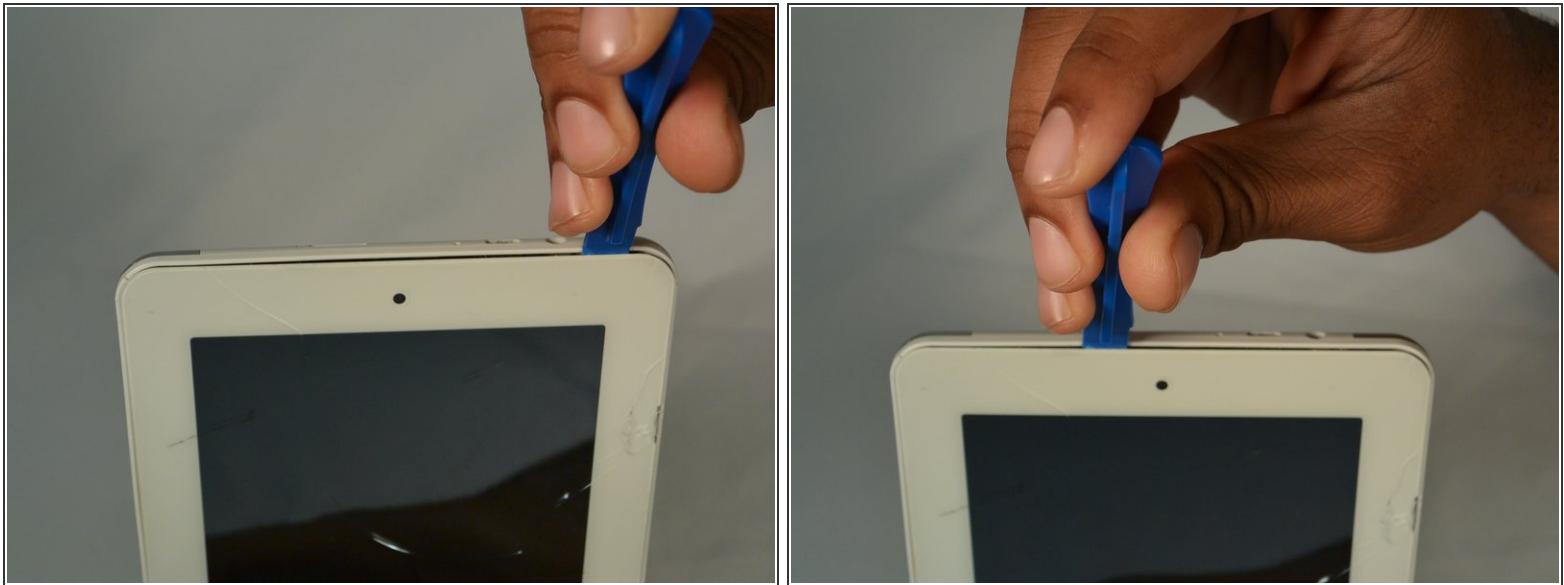

- Use the plastic opening tool to push in between the front and the back of the tablet.
- Slide the plastic opening tool around all 4 sides of the tablet to separate the back cover.


 Be careful when you are trying to remove the back as it can damage the screen if you force it too much.

Step 3

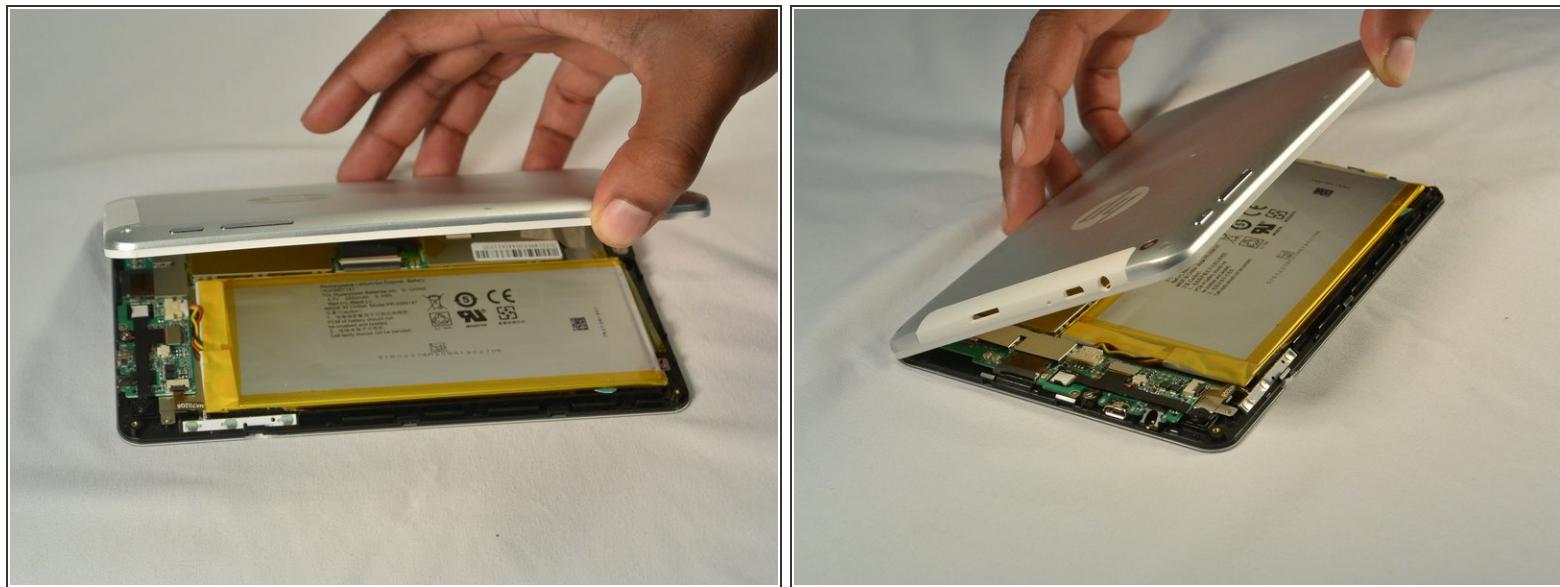

- Continue sliding the plastic opening tool around the tablet until all 4 sides are separated from each other.
- Remove the back cover.

Step 4 — Battery

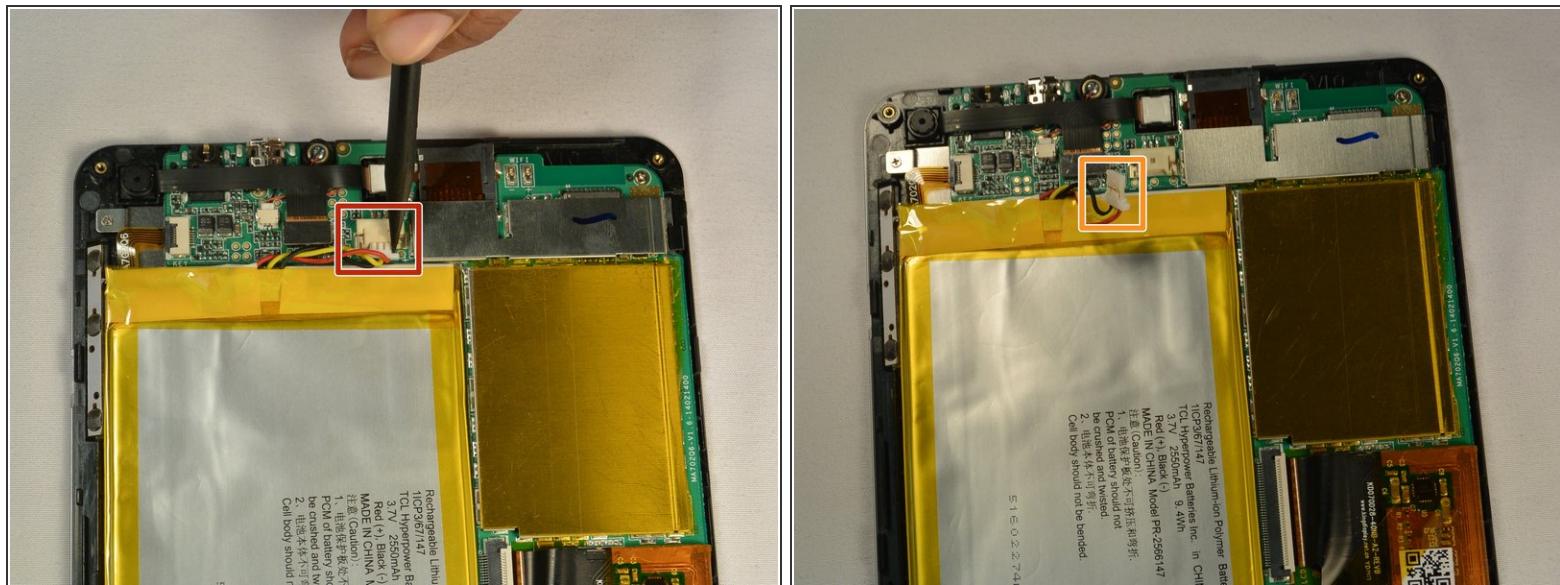

- Push out the battery connector using the spudger.
- Swing the battery connector clear of the connector socket.

Step 5



- Lift the battery from the device.

To reassemble your device, follow these instructions in reverse order. Use new double sided tape to secure the new battery.