




HP 8 1401 Battery Replacement

In this guide, you will learn how to replace the battery of your HP tablet.

Written By: Katie Presz

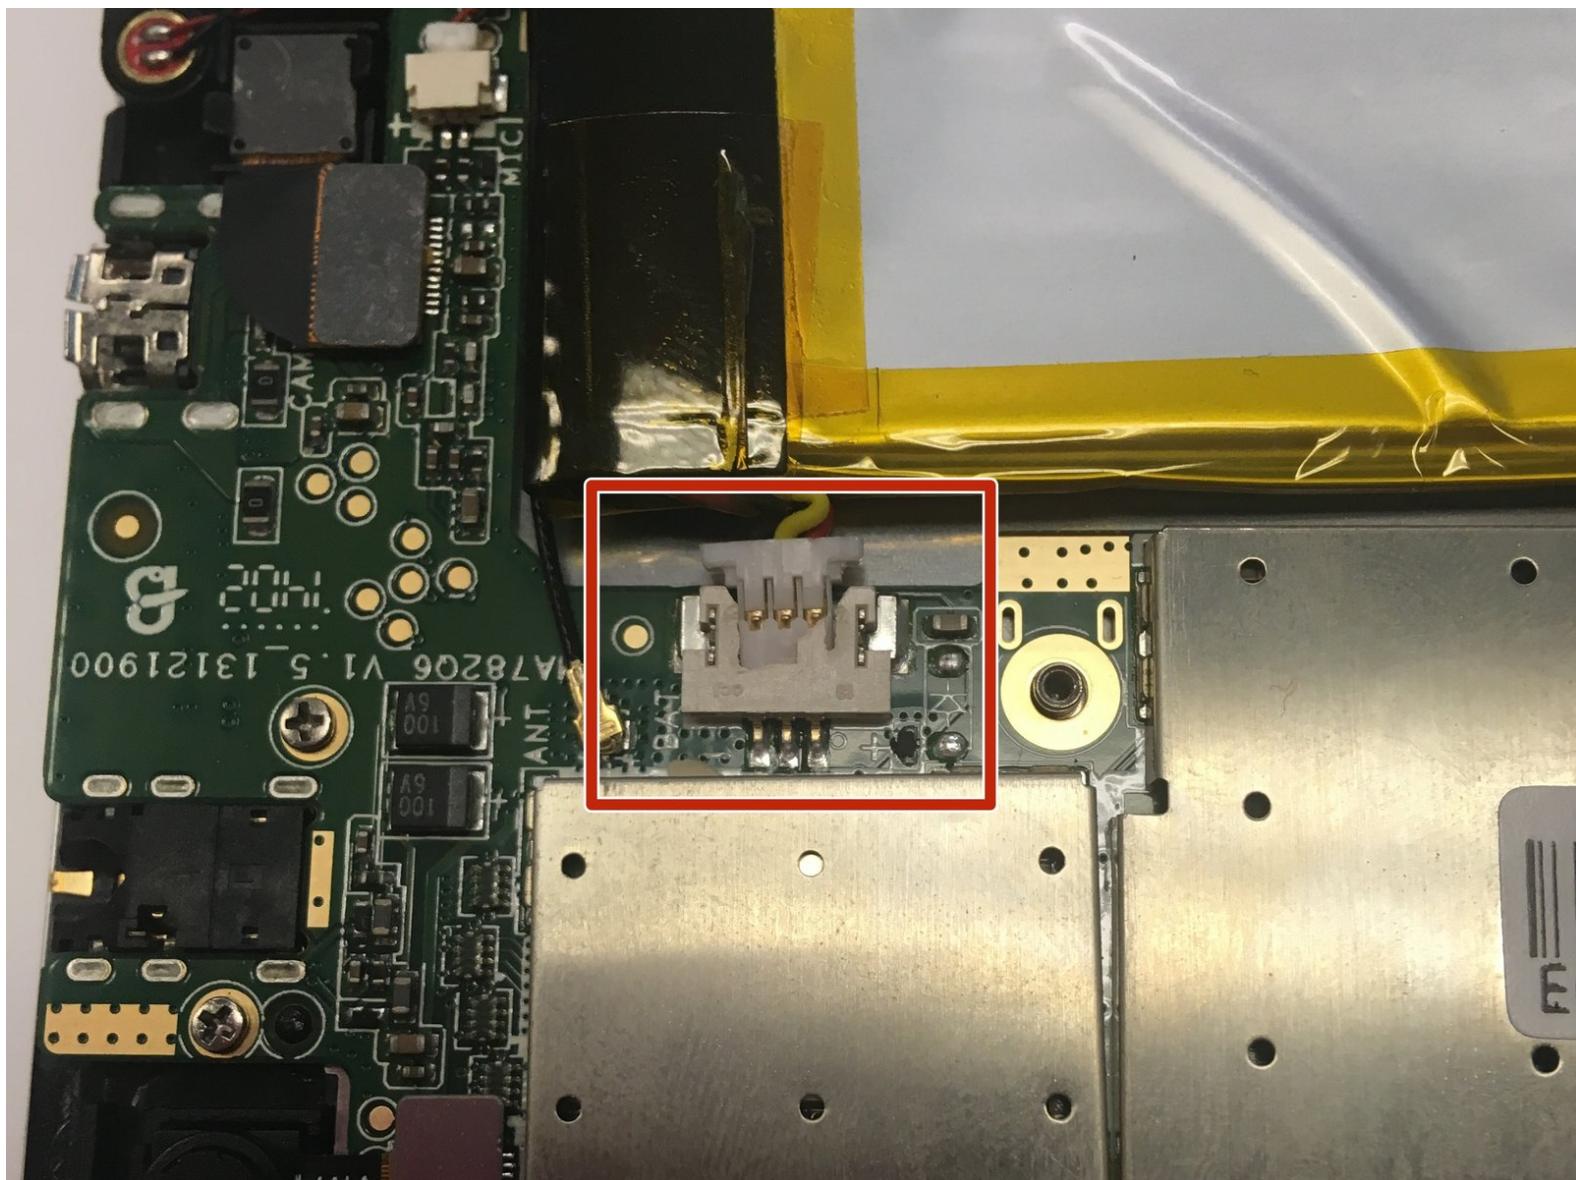

INTRODUCTION

This guide is helpful if you need to replace a dead or damaged battery. Be careful when removing the battery to not bend or puncture it because it may contain hazardous chemicals.

TOOLS:

- [iFixit Opening Tools](#) (1)
- [T4 Torx Screwdriver](#) (1)
- [Tweezers](#) (1)
- [Spudger](#) (1)
- [Plastic Cards](#) (1)

Step 1 — Back Panel



- Using a Torx T4 screwdriver, remove the four 5 mm screws on the back panel.

Step 2





- Insert the tip of a plastic opening tool in the seam between the front and back panels.

Step 3



- Slide the plastic opening tool around all edges of the device until the back panel detaches.
- Lift off the back panel.

Step 4 — Battery

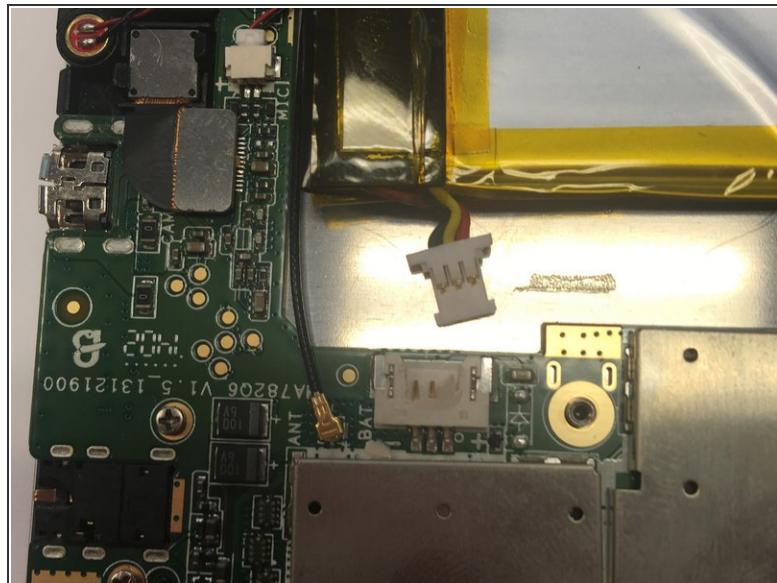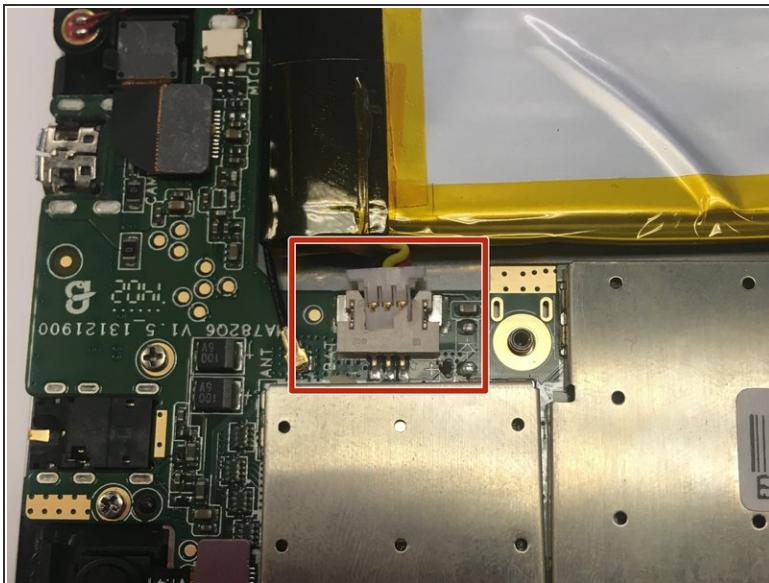

- Using a spudger or your fingers, disconnect the power cable by sliding the connector out of the socket on the motherboard.


Step 5



- Using a plastic card or a nylon spudger, carefully pry the battery from the adhesive on the tablet.

 Do not use a metal spudger, which may damage/puncture the battery and pose a hazard.

Step 6

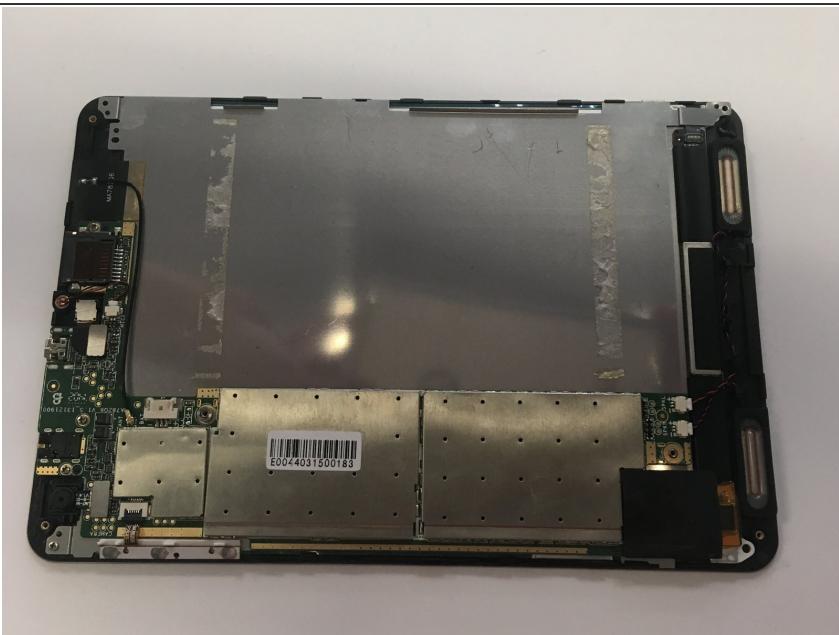

- Once the battery is removed the battery and tablet should look like this.

To reassemble your device, follow these instructions in reverse order.