



# HP 8 1401 Front-Facing Camera Replacement

In this guide, you will learn how to replace the front-facing camera of your HP tablet.

Written By: Katie Presz



Rechargeable  
1ICP3/81/148  
TCL HyperPower  
3.7V 3600  
Red (+), Bla

注意 (Caution)  
1、电池保护板  
PCM of battery  
be crushed a  
2、电池本体  
Cell body st

## INTRODUCTION

This guide should be used if the front-facing camera is malfunctioning, cracked, or has other damage.

### **TOOLS:**

- [iFixit Opening Tools](#) (1)
- [T4 Torx Screwdriver](#) (1)
- [Tweezers](#) (1)
- [Spudger](#) (1)

## Step 1 — Back Panel




- Using a Torx T4 screwdriver, remove the four 5 mm screws on the back panel.

## Step 2




- Insert the tip of a plastic opening tool in the seam between the front and back panels.

## Step 3

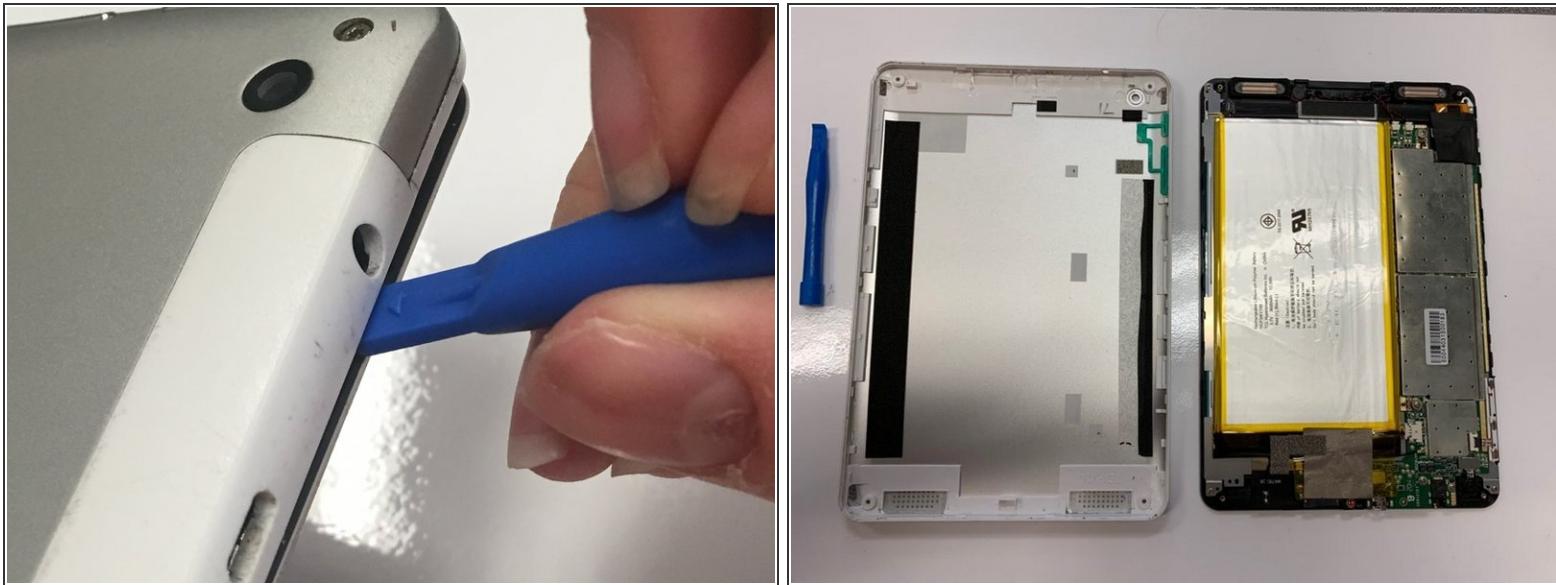


- Slide the plastic opening tool around all edges of the device until the back panel detaches.
- Lift off the back panel.

## Step 4 — Front-Facing Camera

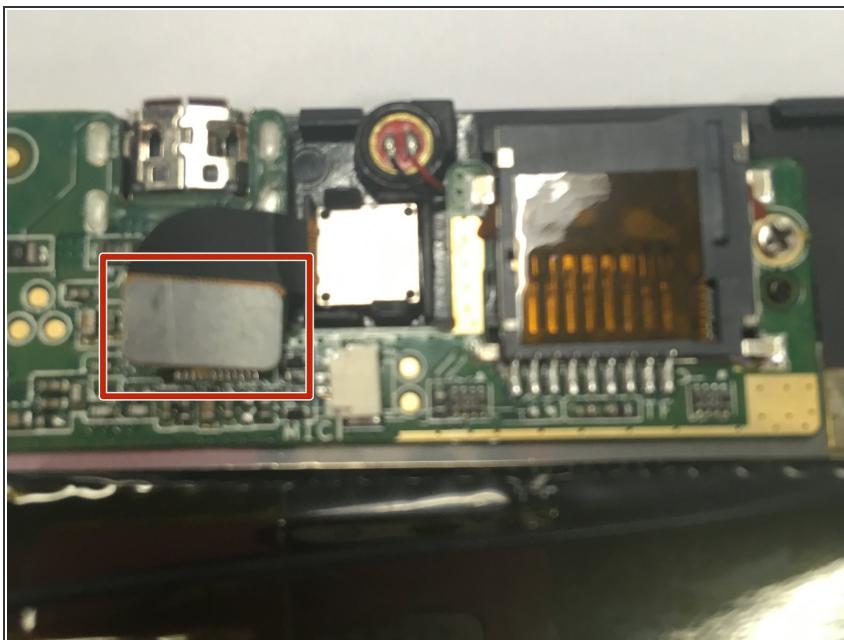


- Place the tip of your spudger under the edge of the press fit connector, and pry the connector straight up from its socket.

## Step 5

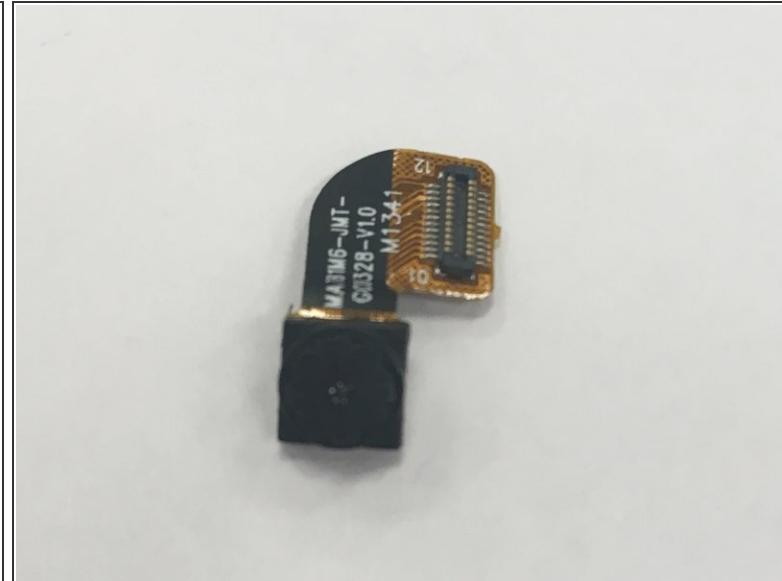

- Lift the front-facing camera out of the tablet.

## Step 6

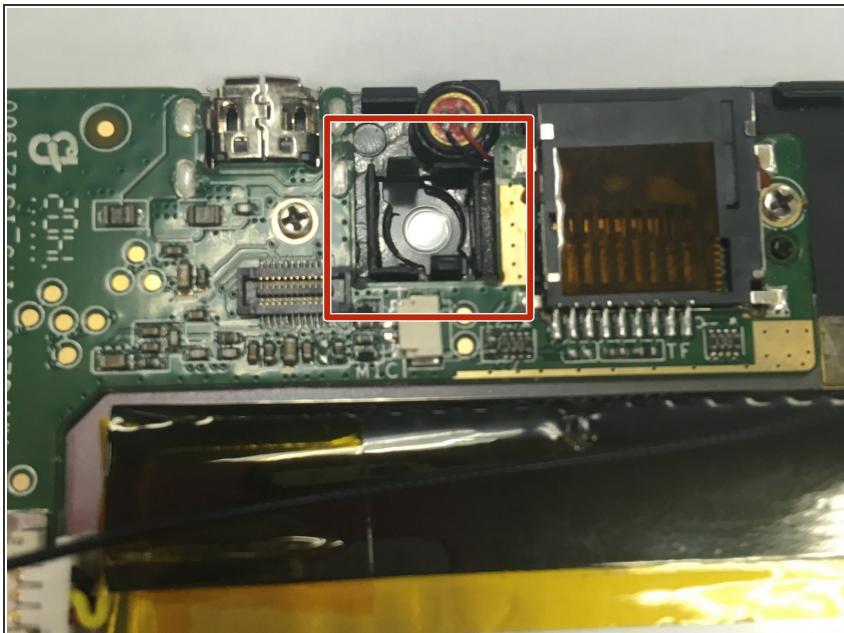

- After the front-facing camera has been removed, the tablet should look like this.

To reassemble your device, follow these instructions in reverse order.