



HP Chromebook 14-q029wm Keyboard Replacement

This guide will show you how to replace the keyboard on your HP Chromebook 14-q029wm.

Written By: Andrew Pratt



INTRODUCTION

If for any reason your HP Chromebook 14-q029wm is having issues with the keyboard, then you came to the right place. If you have already tried to restart your computer and the keyboard still does not want to work, then following the steps provided might help you solve this issue. For more troubleshooting advice click [here](#). This guide will show you how to troubleshoot and replace the keyboard and have you using your computer in no time.

TOOLS:

- [Phillips #0 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)
- [Spudger](#) (1)

Step 1 — Keyboard



- Remove nine 5mm Phillips #0 screws from the back case.
- Remove the rubber caps using a spudger.
- Remove the four remaining 5mm Phillips #0 screws.


Step 2



- Use an opening tool to unclip the bottom plastic covering of the laptop.
- Go around the sides of the laptop until the bottom unclips completely and comes off of the laptop.

⚠ Be careful not to break the plastic clips.

Step 3

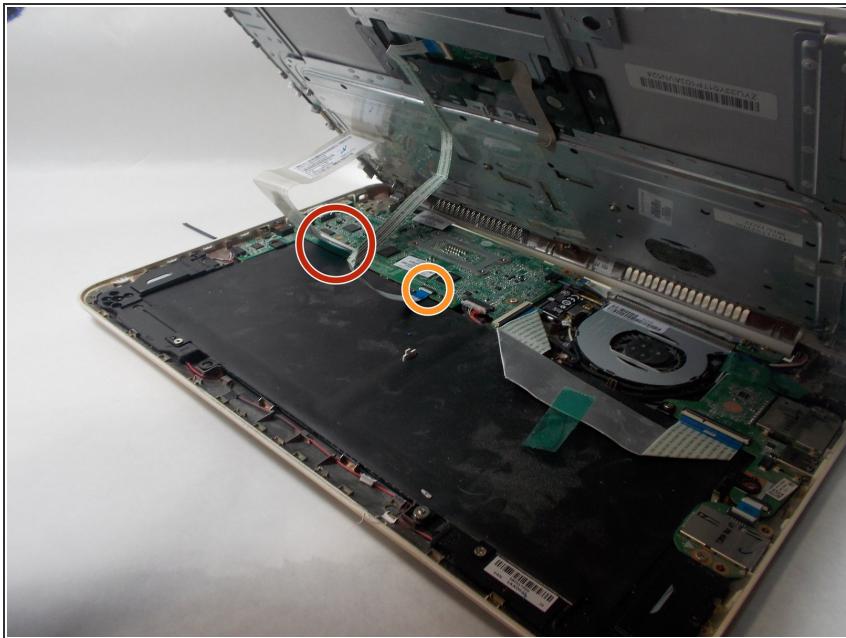

- Once the bottom is completely unclipped, remove the covering slowly so you do not pull and rip the wires.
- There is a little black lever that you have to pull in order to remove the wires. They are found on top of where the wires are connected.
- Remove the larger wire first.
- Then remove the smaller wire.

(i) It is better to use a pair of tweezers for accuracy

- From there the keyboard should completely come off.

To reassemble your device, follow these instructions in reverse order.