



# HP Color LaserJet Pro MFP M277dw Display Replacement

How do I replace the screen in an HP Color LaserJet Pro MFP M277dw.

Written By: Christopher Fahey



## INTRODUCTION

This is a guide to replacing the display on an HP Color LaserJet Pro MFP M277dw. You should not need any special equipment or skills to perform this replacement.

### TOOLS:

- [iFixit Opening Tools](#) (1)
- [Phillips #2 Screwdriver](#) (1)

## Step 1 — Display




- Lift up the top of the printer by pulling up on it.

## Step 2



- Remove one Phillips #2 15mm screw.
- Use the plastic opening tool to remove the top of the display component.
- The cable connecting the display to the motherboard should be visible.

## Step 3

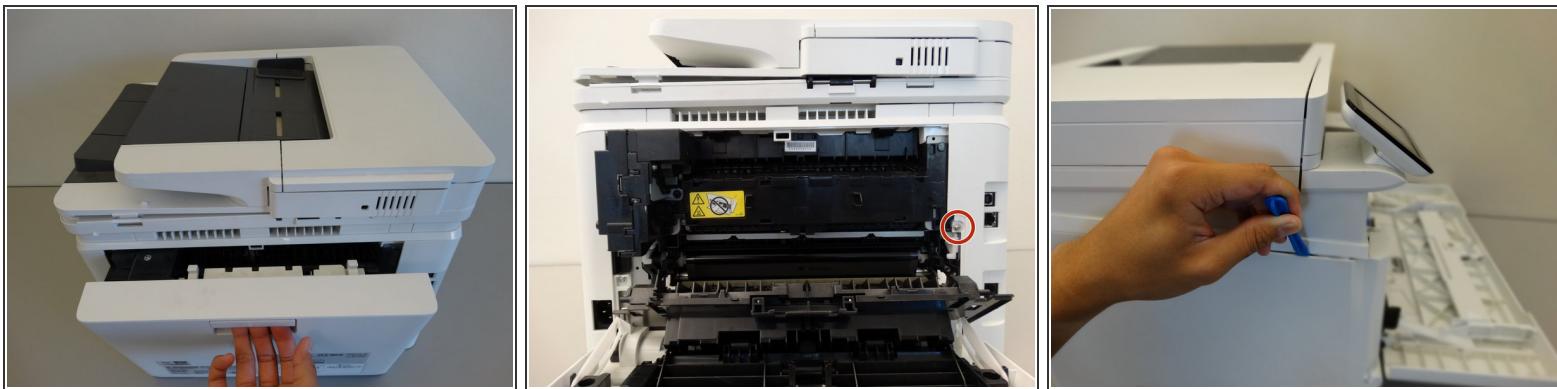

- Lower the back panel by pulling it down.
- Remove one Phillips #2 10mm screw.
- Use the plastic opening tool to remove the left side panel.

*(i)* Flipping the printer onto its side makes it easier to remove the panel and access the motherboard.

## Step 4



- Unplug the display from pink cable from the circuit board.

 Connecting a new display will require you to feed the cable through the printer.

To reassemble your device, follow these instructions in reverse order.

