




# HP EliteBook 745 G2 RAM Chip Replacement

This guide will instruct you on how to replace the RAM Chips for the HP EliteBook 745 G2.

Written By: James Reinemann

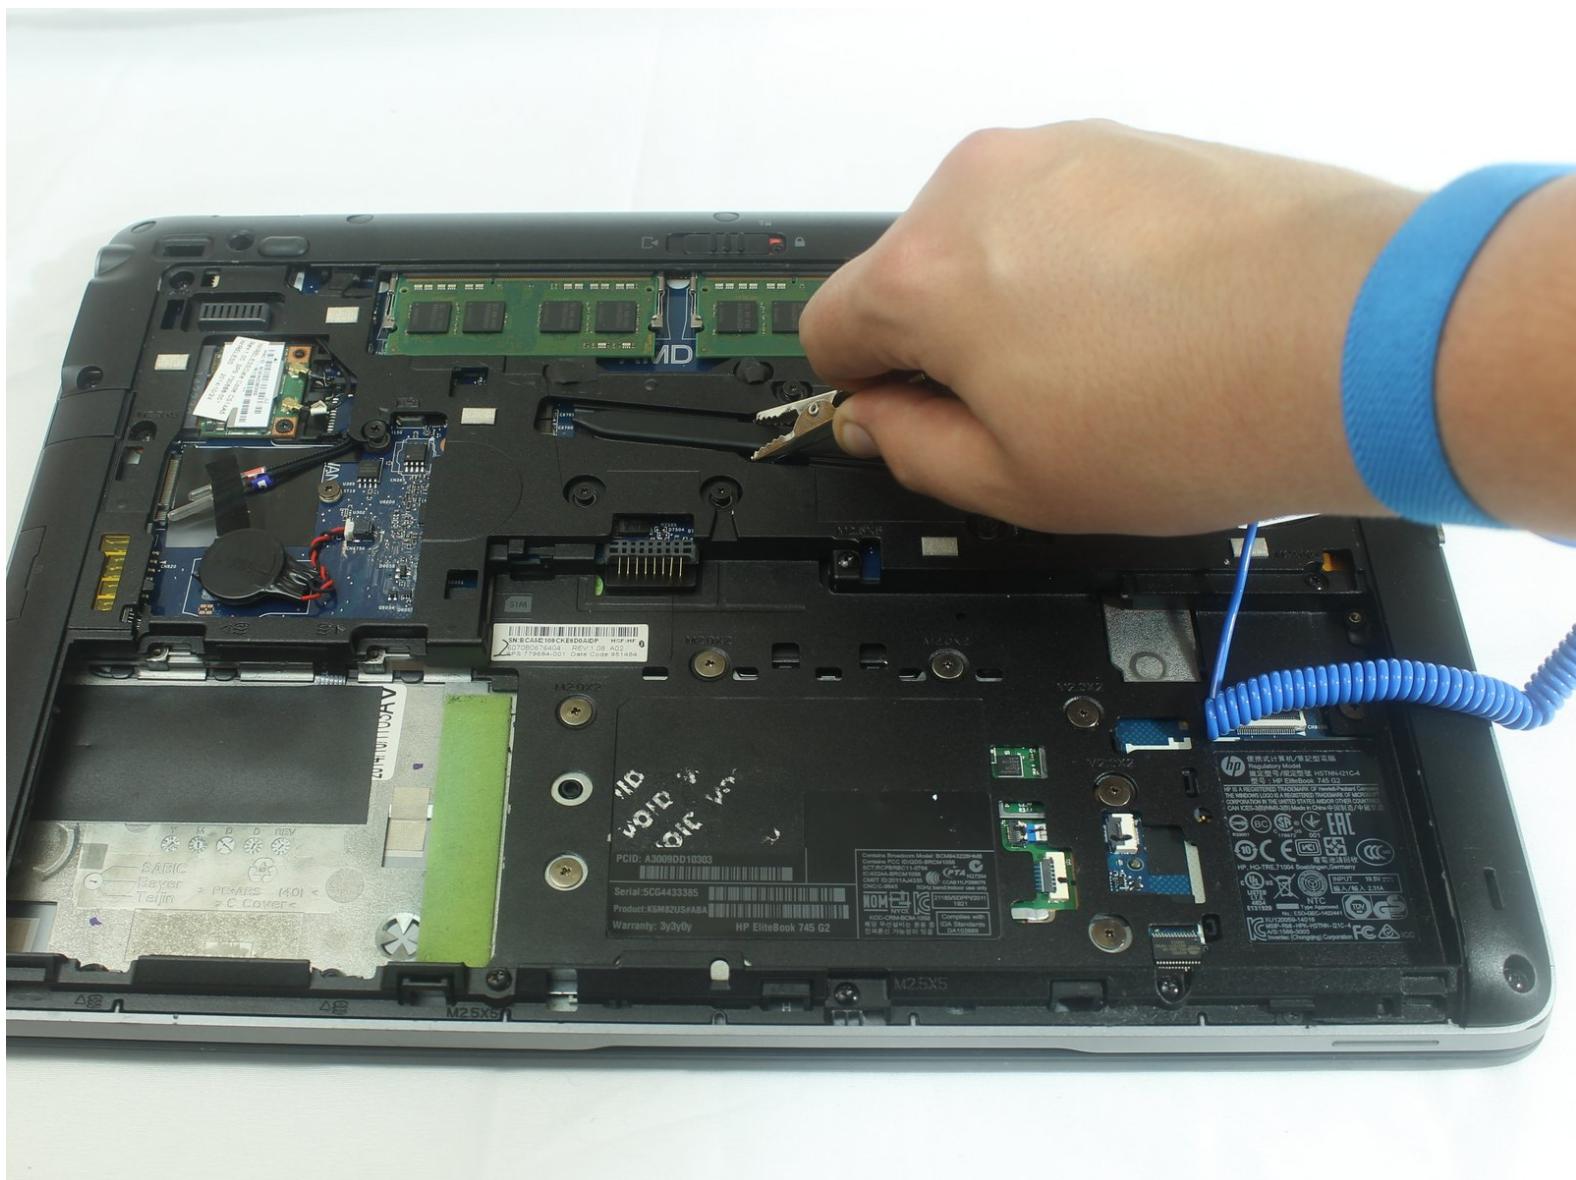

## INTRODUCTION

The following instructions will guide you on how to safely replace the RAM Chips for the HP EliteBook 745 G2. An anti-static wrist strap and a spudger will be required for this repair in order to avoid damaging any of the components of the laptop. The internal electronics of a computer are fragile so conduct this replacement with great care.

## TOOLS:

- [Spudger \(1\)](#)
- [Anti-Static Wrist Strap \(1\)](#)

## Step 1 — Battery




- Gently place the laptop down on a suitable workplace with the back of the laptop facing up

## Step 2




- Remove the cover by sliding the lock to the left. You will hear a click once the cover has been unlocked. Gently push down on the cover and slide it towards you to remove it.

## Step 3

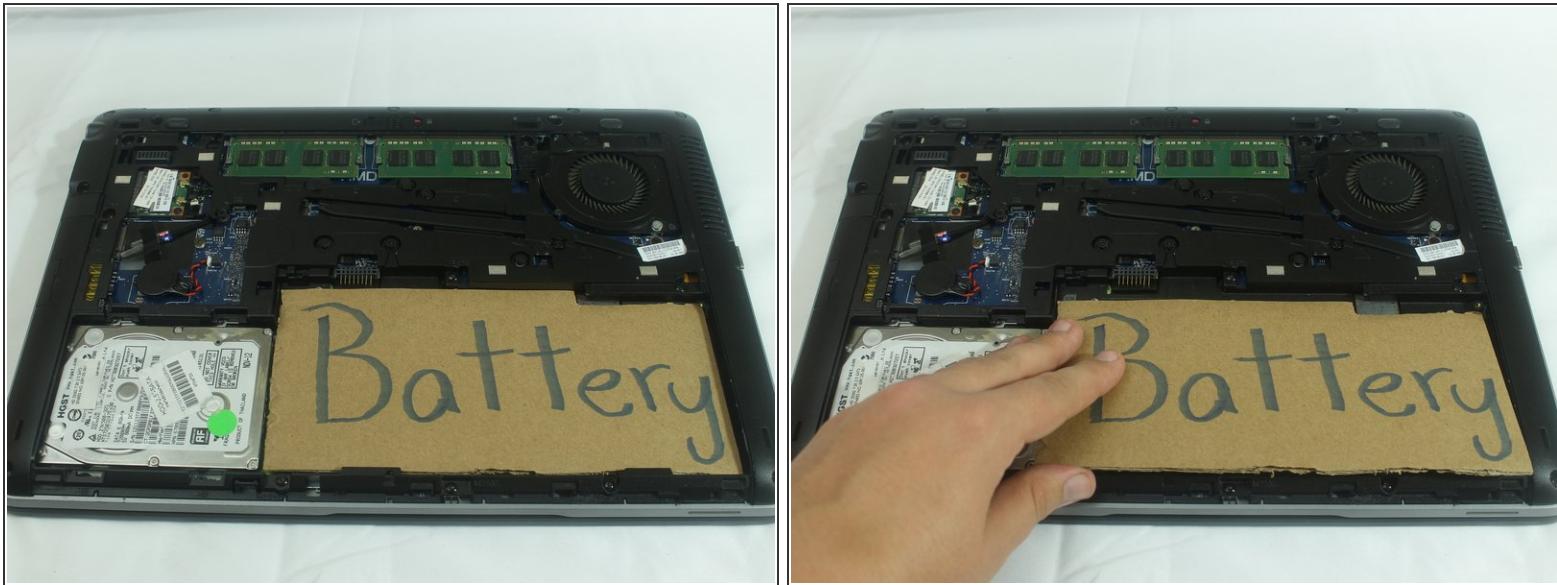


- Gently lift up on the battery (represented by this cardboard cutout) until it disconnects. Once the battery is disconnected lift away from laptop.

## Step 4 — RAM Chip

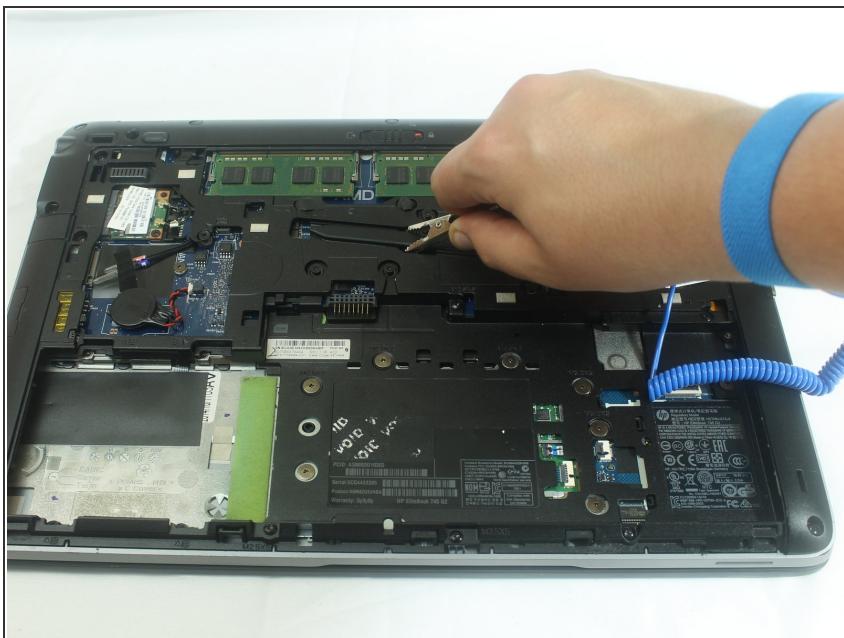


- Attach the anti-static wrist strap to any metal part of the computer to prevent electrical damage.

## Step 5

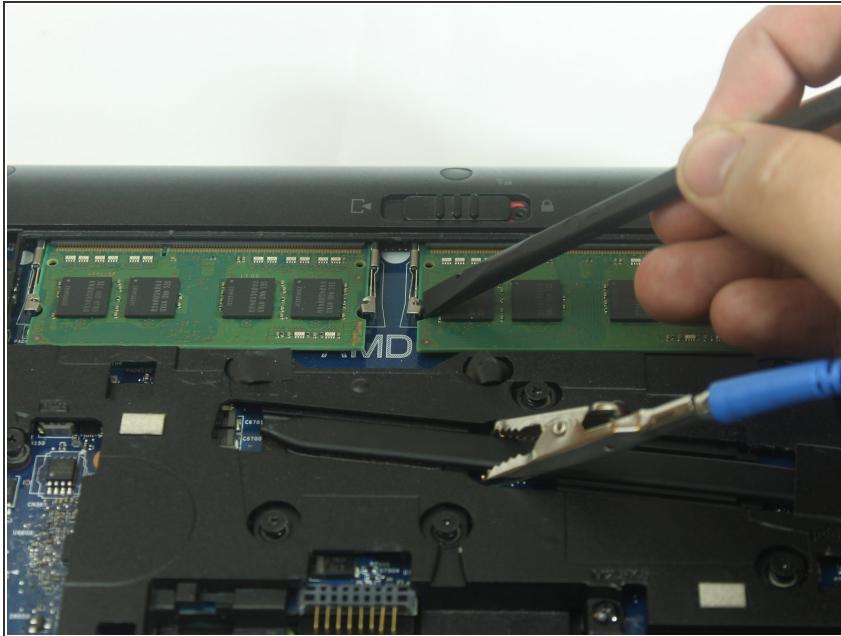

- Using the spudger, gently press down on the tabs holding the chip to release it. Repeat this step for the other chip.

## Step 6

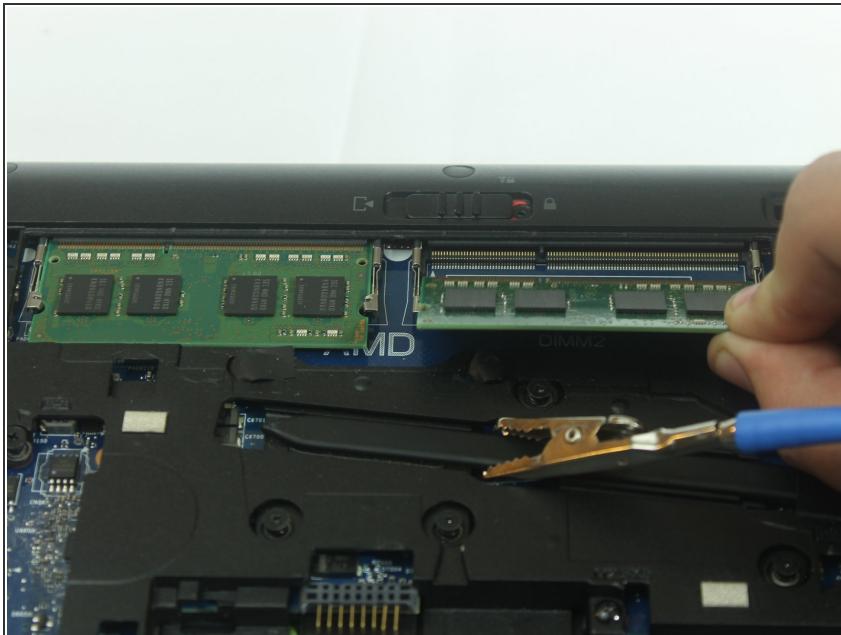

- Grab the chip and lift it away from the laptop at a 45 degree angle.

To reassemble your device, follow these instructions in reverse order.