



HP EliteBook x360 1030 G3 Solid State Drive Replacement

How to remove the solid state drive on the HP EliteBook x360 1030 G3.

Written By: Pablo Arriola



INTRODUCTION

This guide explains how to remove the hard drive from the laptop.

TOOLS:

- **T5 Torx Screwdriver (1)**
- **Phillips #1 Screwdriver (1)**

Step 1 — Bottom Cover



- Close the laptop and flip it so that the screen is on the surface of the table and the back plate is facing you.
- Remove the 3.3 mm screw near the top of the hinge using a T5 Torx screwdriver.
- Remove the remaining four 7.3 mm screws using the same screwdriver.



Step 2



- Separate the bottom cover from the laptop, starting from the upper corner and working your way around the edge.

i *The plastic fastening may make cracking sounds when separating, but this is normal.*

Step 3 — Solid State Drive

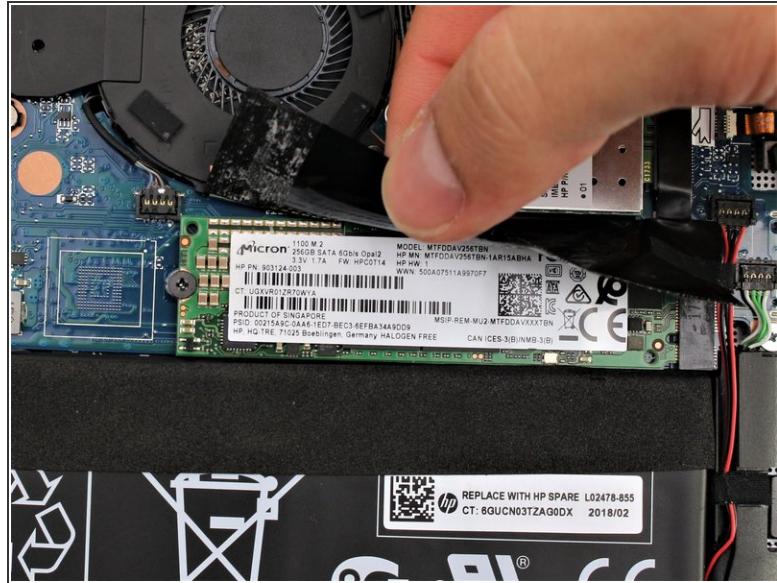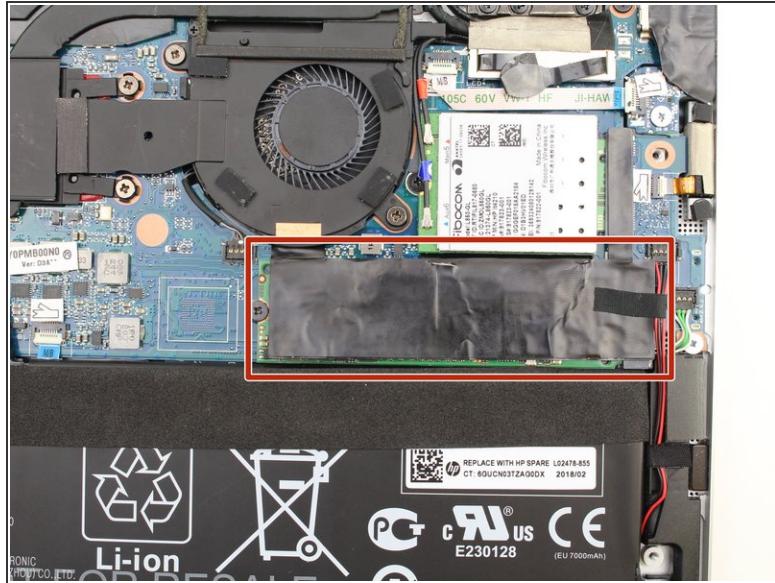

- Lift the black tape covering the solid state drive.

Step 4



- Remove the 2.4 mm screw using a Phillips #1 screwdriver.

Step 5



- Slide the solid state drive to the left and out of its port.

⚠ Be careful when removing the solid state drive as bending any of the pins may render it unusable.

To reassemble your device, follow these instructions in reverse order.