




HP Envy 15-u001dx Disassembly

This guide shows you the steps to open your laptop properly so you can get to the components you need to.

Written By: Dakota Presley

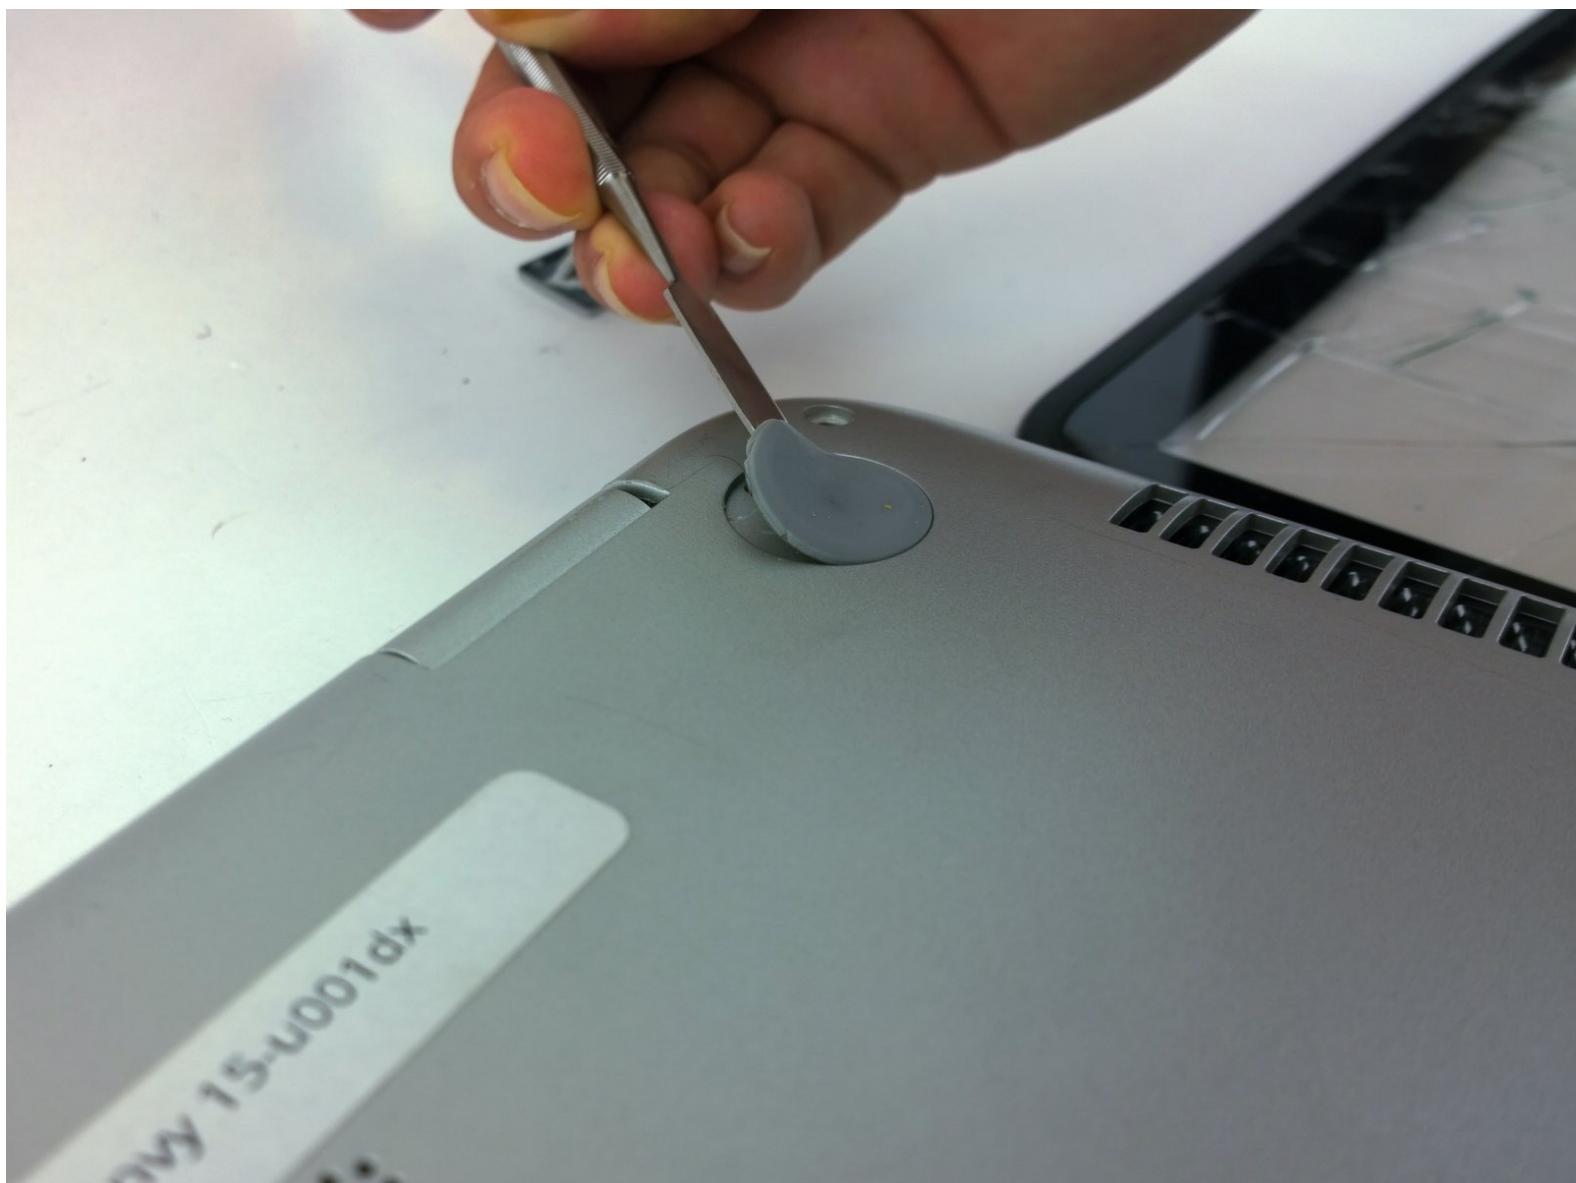


INTRODUCTION

This guide is a necessary first step to many of the other guides for this laptop.

TOOLS:

- [Spudger \(1\)](#)
- [Phillips #0 Screwdriver \(1\)](#)

Step 1 — HP Envy 15-u001dx Disassembly

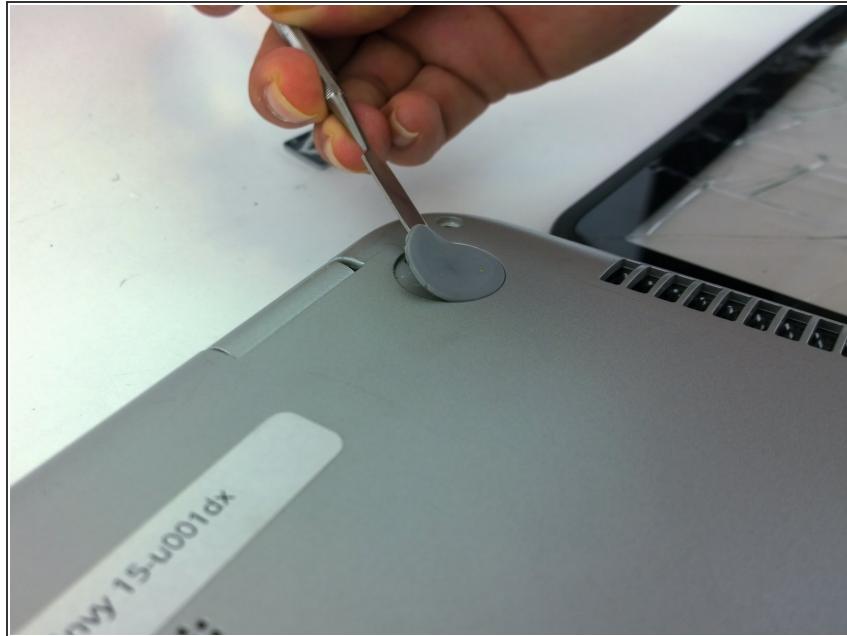

- Remove the two no-slip covers on the rear, bottom side using spudger shown in top center of picture.
- *(i)* The two in the front do not have to be removed as there are no screws underneath them.

Step 2



- Remove the two cover tabs towards center of the bottom as there are screws underneath them.

Step 3



- Remove all fourteen 4.5 mm screws from the bottom using a Phillips #0 screwdriver. Each location is marked by a red circle in the picture.



Step 4



- Separate the top cover by using a spudger to go around the sides freeing the inside latches.

Once the bottom is free, carefully open to the inside as there are two ribbons that connect your keyboard and touch pad to the top cover.

Step 5

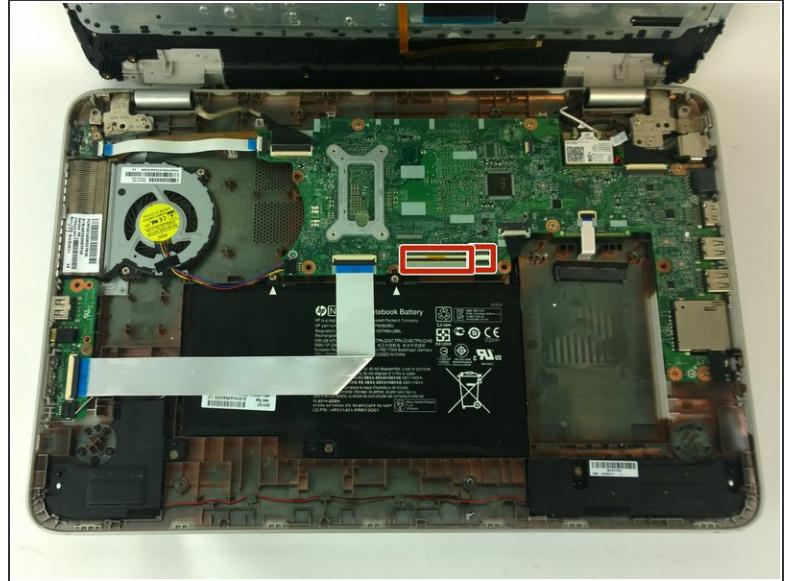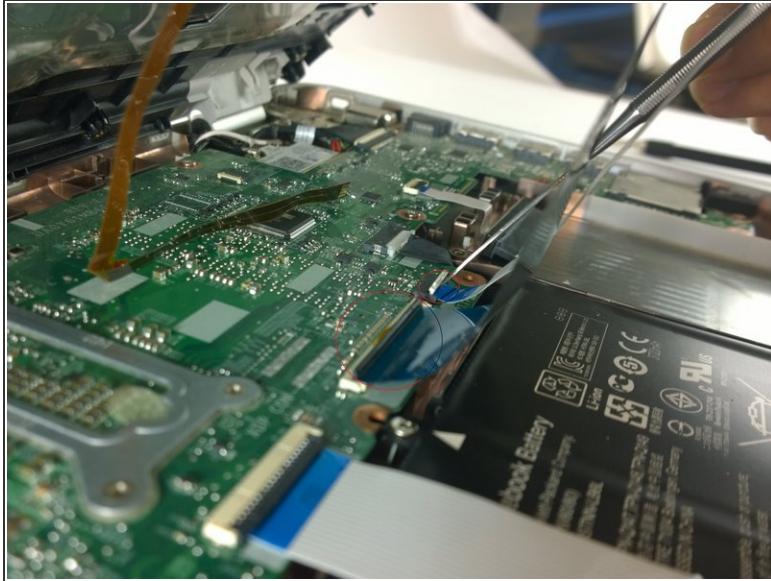

- Use the spudger to detach the two ribbons from their connectors.

⚠ The regular black nylon spudger should be used whenever possible, especially around sensitive internal components.

To reassemble your device, follow these instructions in reverse order.