



HP Envy 17m-ae111dx Back Cover Replacement

Use this guide to remove the back cover of your HP Envy 17m-ae111dx.

Written By: Justin Ogihara



INTRODUCTION

Pre-requisite only guide.

TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [T5 Torx Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)


Step 1 — Back Cover



i Power off your laptop before beginning disassembly.

- Place the laptop on its back.

Step 2

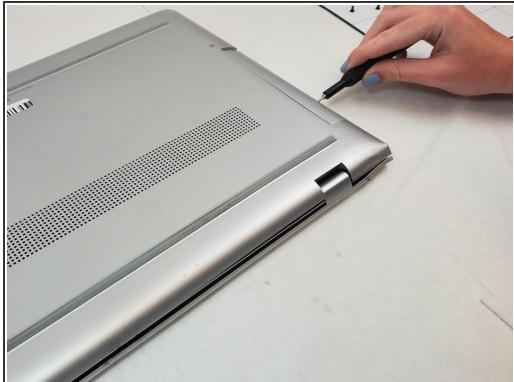

- Remove the plastic covering to the Disk Reader.
- Locate the small hole on the side of the disk reader. Insert the T5 Torx head screwdriver (or device of similar thickness) to release the covering for the disk reader.



i If the button on the side is jammed, pry off the covering by using the iFixit Opening Tool.

Step 3



- Unscrew all visible screws.
 - Use the T5 Torx Screwdriver and remove the four visible 6.5mm screws on the bottom of the laptop.
 - One 2.5mm screw, is located where the disk reader was once located. Use a Phillips #00 screwdriver to remove the single screw that connects the bottom cover of the laptop to the bottom frame.

Step 4

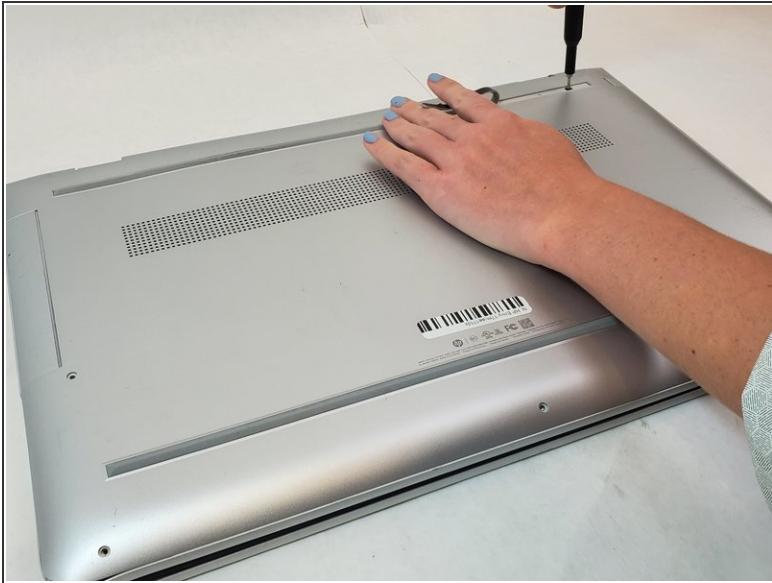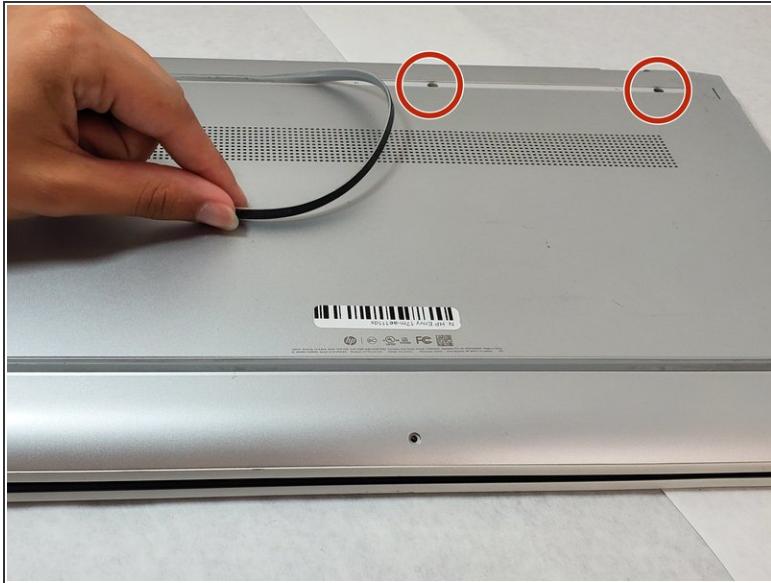

- Pry the gripper completely off to expose the two screws.
- Remove the 2.5mm screws under the gripper nearest to the hinge using the Phillips #00 screwdriver.

Step 5



- Use the iFixit opening tool to pry off the back cover.
- Ensure that you go all the way around the laptop with the tool to take it off.

To reassemble your device, follow these instructions in reverse order.